arXiv:1112.1497v2 [cs.IT] 5 Feb 2012

An Achievable Region for a General Multi-terminal Network and its Chain Graph Representation

Stefano Rini,
Email: `rini.stefano@gmail.com`

Abstract

Random coding, along with various standard techniques such as coded time-sharing, rate-splitting, superposition coding, and binning, are traditionally used in obtaining achievable rate regions for multi-terminal networks. The error analysis of such an achievable scheme relies heavily on the properties of strongly joint typical sequences and on bounds of the cardinality of typical sets. In this work, we obtain an achievable rate region for a general (i.e. an arbitrary set of messages shared amongst encoding nodes, which transmit to arbitrary decoding nodes) memoryless, single-hop, multi-terminal network without feedback or cooperation by introducing a general framework and notation, and carefully generalizing the derivation of the error analysis. We show that this general inner bound may be obtained from a *chain graph representation* of the encoding operations. This graph representation captures the statistical relationship among codewords and allows one to readily obtain the rate bounds that define the achievable rate region. The proposed graph representation naturally leads to the derivation of all the achievable schemes that can be generated by combining classic random coding techniques for any memoryless network used without feedback or cooperation. We also re-derive a few achievable regions for classic multi-terminal networks, such as the multi-access channel, the broadcast channel, and the interference channel, to show how this new representation allows one to quickly consider the possible choices of encoding/decoding strategies for any given network and the distribution of messages among the encoders and decoders.

I. INTRODUCTION

Random coding was first introduced by Shannon in his seminal 1948 paper [1] to prove the channel coding theorem: the essence of this proving method is to analyze the performance of an ensemble of randomly generated codes, rather than of just one good code. By deriving the average performance of an ensemble of codes, we are assured that a good code exists that performs above the average of the ensemble.

In Shannon's words:

> The method of proving [the capacity of a discrete channel with noise] is not by exhibiting a coding method having the desired properties, but by showing that such a code must exist in a certain group of codes.

In random coding, codewords are generated by drawing symbols in an independent, identically distributed (i.i.d.) fashion from a prescribed distribution; the performance of the ensemble of codes is then analyzed as a function of the block-length, which is eventually taken to infinity. Thanks to the i.i.d. symbols, and a block-length which tends to infinity, it is possible to derive the asymptotic performance of the ensemble of codes using the properties of jointly typical sets [2]. This proving technique was originally developed for the point-to-point channel but is easily extended to multi-user channels by introducing multiple codebooks, one for each message to be transmitted. Multiple codebooks can further be organized in complex schemes that takes into account the structure of the network and the distribution of the messages among the users. Coded time-sharing, rate-spitting, superposition coding, binning, Markov encoding, compress and forward, decode, and forward, are some of the strategies that have been developed for multi-terminal channels using the random coding proof technique. Given that all achievability schemes tend to use a combination of "standard" techniques applied in different fashions (leading to different dependencies amongst codewords), one might expect to be able to derive a general achievability scheme for a large class of networks.

The key bounding techniques to analyze the error probability of transmission schemes are presented in an unified fashion by Csiszár and Körner [2, Ch. 1.2] and, more recently, by Kramer [3, Ch. 1] and El Gamal [4, Ch. 1]. Two main results are the "covering lemma" and the "packing lemma". The "covering lemma" describes how to cover a typical set with subsets so that all the typical sequences are contained in at least one subset and it is used to bound the number of codewords available at the encoder. The "packing lemma", on the other hand, deals with the number subsets that can be packed in a typical set so that no typical sequence is contained in more than one subset and it is used to bound the number of typical sequences that can be distinguished at the receiver. By applying these two lemmas, it is possible to derive the achievable region of a number of transmission schemes based on random coding arguments.

In the following we consider two such random coding arguments: *superposition coding* and *binning*[1]; superposition coding and binning are encoding techniques that introduce dependency among codewords utilized by different users. Superposition coding is a method of stacking a codebook on top of another codebook and it was first introduced by Cover [6] to derive an achievable region for the broadcast channel. In superposition coding a first message is conveyed using a "base" codebook of i.i.d. codewords as in the point to point channel while a second message is transmitted using a "top" codebook that is generated for each codeword in the base codebook. The codeword of the top codebook is obtained as i.i.d. draws from a conditional distribution that depends on the chosen base codeword. This way of generating top and bottom codebooks presents the advantage that, once the bottom codeword has been decoded, the top codeword can be decoded by using the knowledge of the base codeword and of the conditional probability of the top codeword. This facilitates the decoding of the top codeword since it reduces the probability of the decoder mistakenly choosing an incorrect top codeword. Bergamas and Gallager [7], [8] proved that superposition coding achieves capacity for the degraded broadcast channel, that is, a broadcast channel where one of the channel outputs is a degraded version of the other. The capacity of this channel is achieved by superposing the message for the non-degraded user on top of the message for the degraded user. Moreover the non-degraded user decodes both messages while the degraded user decodes only the base message. Since the non-degraded user also decodes the degraded message, it is able to boost the decoding of its own message by using the knowledge of the degraded message and its impact on the conditional distribution of the top message, thus achieving capacity.

---

[1] sometimes referred to as Cover random binning [4] or Gel'fand-Pinsker coding [5]

Binning is similar to superposition coding in that it aims at introducing dependency among codewords of different users; this dependency is not introduced at the codebook level, but rather during the encoding procedure. Binning was devised by Sleepian and Wolf [9] to solve the problem of distributed source coding and it was later used by Marton to define an achievable region for the general broadcast channel [10]. As in superposition coding, two messages are encoded using a “top” and a “base” codebook. In the base codebook, each codeword is associated to a message to be sent while in the second codebook multiple codewords are used to transmit the same massage. Codewords associated to the same message are placed in a bin and the encoder chooses among the among the codewords in the bin for a codewords that appears as if conditionally dependent from the base codeword. If such codeword can be found it is transmitted over the channel. The advantage provided by binning is that it introduced dependency among the codewords of different users without requiring that a user decode both codewords as in binning. The non-intended codeword represents interference at a given decoder and binning reduces the effect of such interference by correlating the interference with the transmitted codeword.

Superposition coding and binning are two random coding techniques to generate transmission codebooks and encoding messages. The rate regions that can be achieved with these random coding techniques can be further enlarged by considering two conceptually simple transmission strategies: *coded time-sharing* and *rate-splitting*. Coded time-sharing was originally introduced by Han and Kobayashi [11] when deriving an achievable region for the interference channel and it consists of utilizing different codebooks at different time instances according to a random schedule. Coded time-sharing generalizes time-division and frequency division multiple access and it achieves the convex hull of the time shared achievable regions and possible larger regions [2, pp. 288-290]. Although time-sharing is sometimes not needed to achieve capacity, it is necessary to show the convexity of the achievable region based on superposition coding for the broadcast channel [12], [13] and for the interference channel in strong interference [14], [15].

As for coded time-sharing, rate-splitting was also introduced by Han and Kobayashi in [11] and it consists of splitting a message of one user into multiple sub-messages to be decoded by a larger set of decoders than the original intended decoder. Since each of the sub-messages is still decoded by the original decoder, the transmission rate is unchanged but by splitting the message into subparts it is possible to utilize a larger set of transmission strategies. In [11] rate-splitting is used to derive a new achievable region for the classic interference channel. The message at each transmitter is divided into private and public parts and the private messages are superposed over the public ones. Each transmitter successively decodes both public messages and the private message from the intended transmitter. Without rate-splitting, the only available transmission strategy at the encoders is to transmit the two messages in two independent codewords and each decoder can then either decode one codeword or two. By splitting the messages into public and private parts it is possible to construct a more complicated transmission strategy without altering the rate at which each message is being transmitted.

Although many other encoding strategies have been proposed in information theory, these simple four strategies achieve capacity for a large number of one-hop channels with no feedback or user cooperation.

Tab. I summarizes several classic capacity results for some of such channels and indicates which of the four transmission strategies, superposition coding, binning, rate-splitting and time-sharing is necessary to achieve capacity.

In this paper we introduce an achievable scheme involving superposition coding, binning, rate-splitting, and coded time-sharing valid for a general one-hop channel without feedback. This achievable scheme is defined by the random variables representing different codewords and by the factorization of the joint distribution among these random variables. We develop a graph representation of the factorization of the joint distribution based on Markov graphs [27], [28]: in particular we define a Markov chain graph with two types of edges, one representing superposition coding and one representing binning. In information theory, a similar attempt to capture the relationship between random variables is the *functional dependence graph* [3, App. 8]. Despite fundamental similarities, the functional dependence graph is used mainly to represent the Markov relationship between random variables, while, in our case, the Markov chain graph describes a transmission scheme and the relationship between codewords of different users.

By building upon the fundamental results in random coding theory and graph theory, we define a formal representation and a standard notation for a general achievable scheme as well as the derivation of the achievable region. Our ultimate goal is to define a form of “automatic rate region generator” which outputs the best known random coding achievable rate region for any channel of choice.

TABLE I
CAPACITY RESULTS INVOLVING SUPERPOSITION CODING, BINNING, CODED TIME-SHARING AND RATE-SPLITTING

	superposition	binning	rate-splitting	coded time-sharing	reference
multiple access channel	✓			✓	[12], [16]
more capable broadcast channel	✓				[17], [18]
semi-deterministic broadcast channel		✓			[19]
broadcast channel, degraded message set	✓				[20]
Gaussian MIMO broadcast channel		✓			[21]
interference channel, strong interference regime	✓		✓	✓	[15], [14]
deterministic interference channel	✓		✓	✓	[22]
cognitive interference channel, better cognitive decoding	✓		✓		[23]
semi-deterministic cognitive interference channel		✓	✓		[24]
Gaussian cognitive interference channel, weak interference		✓			[25]
Cognitive interference channel, degraded message set	✓		✓		[26]

A. Main Contributions

In this paper:

1) **We propose a novel *chain graph* representation for encoding schemes based on standard random coding techniques. This representation is for a general, single-hop, memoryless, multi-terminal network used without feedback/cooperation where the number of transmitters and receivers, as well as the set of messages amongst transmitters, is arbitrary.** This new formalism provides a clear and unified framework to represent achievability schemes based on random coding arguments; it includes and generalizes all known achievable schemes for the class of networks considered.
2) **We derive the achievable rate regions based on the proposed *chain graph* representation.** The proposed chain graph representation naturally leads to the generalization of the error analysis using classic bounds of the error probability and typicality arguments such as the covering lemma and the packing lemma. The achievable rate regions are obtained by the analysis of the chain graph representation of the achievable scheme for any channel in the class we consider.
3) **We compare the rate regions obtained using different bounds for the probability of encoding and decoding errors.** We explicitly characterize the rate bounds obtained using the covering lemma and mutual covering lemma to bound the encoding error probability, and sequential decoding and joint decoding to bound the decoding error probability. By comparing the corresponding achievable region, it is possible to determine how these different bounding techniques compare for a general channel.
4) **We re-derive a few achievable regions for classic channel models to provide simple and yet insightful examples of the chain graph representation.** We focus on the multi-access channel, the broadcast channel, the interference channel, and the cognitive interference channel and re-obtain the largest know achievable regions for these channels as well as introducing new transmission strategies.

B. Paper Organization

Section II presents the class of networks considered in this work and revises the standard random coding techniques that we employ in our general achievable scheme. Section III introduces the novel *chain graph* representation of the encoding operations. Section IV describes the codebook generation, encoding and decoding procedures of the achievable scheme associated to a specific graph representation. Section V derives the rate bounds that define the achievable rate region based on the proposed *chain graph* representation. In Section VI we derive a series of achievable schemes for classic information theoretical models. Section VII concludes the paper.

II. CHANNEL MODEL AND RANDOM CODING TECHNIQUES FOR ACHIEVABILITY

A. Notation

In Sec. II we define a general single-hop, memoryless, multi-terminal network without feedback/cooperation. Given the generality of this model we try to adopt a notation that is clear, yet intuitive, when describing general subsets of users, messages, and random variables (RV). We consider a channel with $N_{\rm TX}$ transmitters and $N_{\rm RX}$ receivers. In order to designate arbitrary subsets of transmitter and receiver nodes we use bold lower case letters:

$$\mathbf{i} \subset \mathfrak{P}_N = \mathfrak{P}\left(\{1 \ldots N\}\right), \tag{1}$$

where $\mathfrak{P}$ indicates the power set and N is either $N_{\rm TX}$ or $N_{\rm RX}$.

To compactly index the messages from certain transmitting nodes to other receiving nodes, we use bold upper case letters

$$\mathbf{S} \subset \mathfrak{P}_{N_1} \times \mathfrak{P}_{N_2} = \mathfrak{P}\left([1 \ldots N_1]\right) \times \mathfrak{P}\left([1 \ldots N_2]\right), \tag{2}$$

where generally we will have $(N_1, N_2) = (N_{\rm TX}, N_{\rm RX})$. When no conditions are specified on a set operation, the operation is assumed to be over all the elements in the set, i.e.

$$\sum_{\mathbf{i}} a_{\mathbf{i}} = \sum_{\mathbf{i}, \ \forall \ \mathbf{i} \subset \mathfrak{P}_N} a_{\mathbf{i}}, \tag{3a}$$

$$\sum_{\mathbf{S}} a_{\mathbf{S}} = \sum_{\mathbf{S}, \ \forall \ \mathbf{S} \subset \mathfrak{P}_{N_1, N_2}} a_{\mathbf{S}}. \tag{3b}$$

Also let

$$\sum_{\mathbf{i}, \ (i)} a_{\mathbf{i}} = \sum_{\mathbf{i} \ \in \ I_{(i)}} a_{\mathbf{i}}, \tag{4}$$

where

$$I_{(i)} = \{\mathbf{i} \in \mathfrak{P}_N \ \ \text{s.t.} \quad \text{condition } (i) \text{ holds for } \mathbf{i}\}$$

We adopt the following conventions for superscripts and subscripts:

- index k/z: transmitters/receivers, for $k \in [1 \ldots N_{\rm TX}]$ and $z \in [1 \ldots N_{\rm RX}]$,
- X_k, Y_z: channel inputs/outputs at transmitter k and receiver z,
- index **i**/**j**: subset of transmitters/receivers. We will also use $\mathbf{l}/\mathbf{m}$ and $\mathbf{v}/\mathbf{t}$ when dealing with multiple subsets,
- index $\mathbf{S}$: set of containing $(\mathbf{i}, \mathbf{j})$ pairs,
- $\overline{\mathbf{S}}$: complement of the set $\mathbf{S}$ in $\mathfrak{P}_{N_{\rm TX}} \times \mathfrak{P}_{N_{\rm RX}}$.
- $[N_1 \ldots N_2]$ indicates the subset of $\mathbb{N}$ between N_1 and N_2.

B. Properties of typical sequences

The majority of the results in the paper are derived using properties of letter-typical sequences; we adopt the definition of letter-typicality in [2], [29], [3], [4].

Definition Let x^N be a finite sequence whose ith entry takes values in $\mathcal{X}$ and let $N(a|x^N)$ be the number of occurrences of the letter a in x^N for $a \in \mathcal{X}$ where $\mathcal{X}$. For $\epsilon \geq 0$, we say that a sequence x^N is ϵ-letter typical with respect to P_X if

$$\left| \frac{1}{N}(a|x^N) - P_X(a) \right| \leq \epsilon \cdot P_X(a) \qquad \forall \ a \in \mathcal{X}. \tag{5}$$

The set of x^N satisfying (II-B) is called *ϵ-letter typical set* (or, more simply, *typical set*) and is denoted as $\mathcal{T}_\epsilon^N(P_X)$. The letter typical sequences are those sequences whose empirical distribution is close to P_X. The next theorem establishes the fundamental properties of typical sequences.

Theorem II.1. *Suppose $0 \leq \epsilon \leq \mu_X$, $x^N \in \mathcal{T}_\epsilon^N$ and X^N distributed as i.i.d. draws from the distribution P_X^N, then the following holds*

$$2^{-N(1+\epsilon)H(X)} \leq P_X^N(x^N) \leq 2^{-N(1-\epsilon)H(X)} \tag{6a}$$

$$(1 - \delta_\epsilon(N)) 2^{N(1-\epsilon)H(X)} \leq |\mathcal{T}_\epsilon^N| \leq 2^{N(1+\epsilon)H(X)} \tag{6b}$$

$$1 - \delta_\epsilon(N) \leq \mathbb{P}\left[X^N \in \mathcal{T}_\epsilon^N(P_X)\right] \leq 1, \tag{6c}$$

for some $\delta_\epsilon(N)$ such that $\delta_\epsilon(N) \to 0$ as $N \to \infty$.

The properties of typical sequences in Th. II.1 are crucial in deriving transmission schemes based on random coding.

TABLE II
THE MESSAGES FOR A GENERAL IFC.

	from Tx1	from Tx2	from both Tx's
to Rx1	$W_{1\to1}$	$W_{2\to1}$	$W_{\{1,2\}\to1}$
to Rx2	$W_{1\to2}$	$W_{2\to2}$	$W_{\{1,2\}\to2}$
to both Rx's	$W_{1\to\{1,2\}}$	$W_{2\to\{1,2\}}$	$W_{\{1,2\}\to\{1,2\}}$

C. Network Model

We consider a multi-terminal network where $N_{\rm TX}$ transmitting nodes want to communicate with $N_{\rm RX}$ receiving nodes. A given node may only be a transmitting or a receiving node (and may not alternate between them), that is, the network is single-hop and it is used without feedback/cooperation. The transmitting node k, $k \in [1 \ldots N_{\rm TX}]$, inputs X_k to the channel, while the receiving node z, $z \in [1 \ldots N_{\rm RX}]$, has access to the channel output Y_z. The channel transition probability is indicated with $P_{Y_1 \ldots Y_{N_{\rm RX}}|X_1 \ldots X_{N_{\rm TX}}}$. The channel is assumed to be memoryless. The subset of transmitting nodes $\mathbf{i}$, $\mathbf{i} \in \mathfrak{P}_{N_{\rm TX}}$, is interested in sending the message $W_{\mathbf{i}\to\mathbf{j}}$ to the subset of receiving nodes $\mathbf{j} \in \mathfrak{P}_{N_{\rm RX}}$ over N channel uses. The total number of messages is $(2^{N_{\rm TX}}-1)(2^{N_{\rm RX}}-1)$ and includes all possible combinations of "degraded message sets"/cognition. The message $W_{\mathbf{i}\to\mathbf{j}}$, $(\mathbf{i},\mathbf{j}) \in \mathfrak{P}_{N_{\rm TX}} \times \mathfrak{P}_{N_{\rm RX}}$, uniformly distributed in the interval $[0 \ldots 2^{NR_{\mathbf{i}\to\mathbf{j}}}-1]$, where N is the block-length and $R_{\mathbf{i}\to\mathbf{j}}$ the transmission rate. The outcome of the RV $W_{\mathbf{i}\to\mathbf{j}}$ is denoted with $w_{\mathbf{i}\to\mathbf{j}}$ and the set of all messages is denoted by $\mathbf{w} = \{w_{\mathbf{i}\to\mathbf{j}},\ \forall\ (\mathbf{i},\mathbf{j}) \in \mathfrak{P}_{N_{\rm TX}} \times \mathfrak{P}_{N_{\rm RX}}\}$.

A rate vector $\mathbf{R} = \{R_{\mathbf{i}\to\mathbf{j}},\ \forall\ (\mathbf{i},\mathbf{j}) \in \mathfrak{P}_{N_{\rm TX}} \times \mathfrak{P}_{N_{\rm RX}}\}$ is said to be achievable if there exists a sequence of encoding functions

$$X_k^N = X_k^N, \left(\{W_{\mathbf{i}\to\mathbf{j}},\ \text{s.t.}\ \ (\mathbf{i},\mathbf{j}) \subset \mathfrak{P}_{N_{\rm TX}} \times \mathfrak{P}_{N_{\rm RX}}, k \in \mathbf{i}\}\right),$$

and a sequence of decoding functions

$$\widehat{W}^z_{\mathbf{i}\to\mathbf{j}} = \widehat{W}^z_{\mathbf{i}\to\mathbf{j}}\left(Y_z^N\right)\ \text{if}\ z \in \mathbf{j}, \tag{7}$$

such that

$$\lim_{N\to\infty} \max_{\mathbf{i},\mathbf{j},z} \mathbb{P}\left[\widehat{W}^z_{\mathbf{i}\to\mathbf{j}} \neq W^z_{\mathbf{i}\to\mathbf{j}}\right] = 0.$$

The capacity region $\mathcal{C}(\mathbf{R})$ is the convex closure of the region of all achievable rates in the vector $\mathbf{R}$-pairs.

Determining capacity is, in general, a complex task that requires an extensive understanding of the channel model, for this reason one is often interested in determining a subset of the capacity region where some rates have been fixed to zero. Let

$$\mathcal{C}(\mathbf{R_T}), \quad \mathbf{T} \subset \mathfrak{P}_{N_{\rm TX}} \times \mathfrak{P}_{N_{\rm RX}} \tag{8}$$

denote the capacity region restricted to the plane $\mathbf{R_T} = \{R_{\mathbf{i}\to\mathbf{j}},\ \forall\ (\mathbf{i},\mathbf{j}) \in \mathbf{T}\}$ which corresponds to the capacity region of a less general channel where the rates $\left\{R_{\mathbf{i}\to\mathbf{j}},\ (\mathbf{i},\mathbf{j}) \in \overline{\mathbf{T}}\right\}$ have been set to zero.

Fig. 1 shows the channel model considered in this work: on the left of the figure there are the $N_{\rm TX}$ transmitting nodes, each with input X_k to the channel. The channel is described by the transition probability $P_{Y_1 \ldots Y_{N_{\rm RX}}|X_1 \ldots X_{N_{\rm TX}}}$ and, given the channel inputs $[X_1 \ldots X_{N_{\rm TX}}]$ randomly produces the channel outputs $[Y_1 \ldots Y_{N_{\rm RX}}]$ which are then received at $N_{\rm RX}$ decoders on the right.

A large number of channel models studied in information theory are included in the class of networks, such as the multiple access channel, [12], [16], the broadcast channel [30], [7], [8], the interference channel [31], [32], [11], and the cognitive interference channel [33], [34], [23].

D. An example: the general two-user interference channel

To make the reader familiar with the notation in Sec. II-A and the general model in Sec. II-C, we describe the general two-user interference channel (general IFC), that is the model in Sec. II-C in the case of $N_{\rm TX} = N_{\rm RX} = 2$.

This channel model is depicted in Fig. 2: two transmitters communicate to two receivers through the channel $P_{Y_1,Y_2|X_1,X_2}$. The total number of messages to be sent over the channel is $(2^2-1)(2^2-1) = 9$ and is obtained by considering all the possible ways in which a message can be encoded by any subset of transmitters and decoded by any subset of receivers.

All the nine possible messages are listed in Tab. II using the notation in (2): $W_{1\to\mathbf{j}}$ and $W_{2\to\mathbf{j}}$ are the messages known only at transmitter 1 and 2, respectively, while message $W_{\{1,2\}\to\mathbf{j}}$ is a message known at both. Similarly, $W_{\mathbf{i}\to1}$ and $W_{\mathbf{i}\to2}$ are the messages to be decoded only at receivers 1 and 2, respectively, while message $W_{\mathbf{i}\to\{1,2\}}$ is to be decoded at both.

In literature, one often refers to the message $W_{1\to1}$ as a private message, $W_{\{1,2\}\to1}$ as a common message and to $W_{1\to\{1,2\}}$ as a degraded message. It is clear from this simple example that this nomenclature is somewhat confusing when considering the most general distribution of messages even for a channel with small number of users. For this reason we avoid this terminology and choose instead the notation in (1) and in (2).

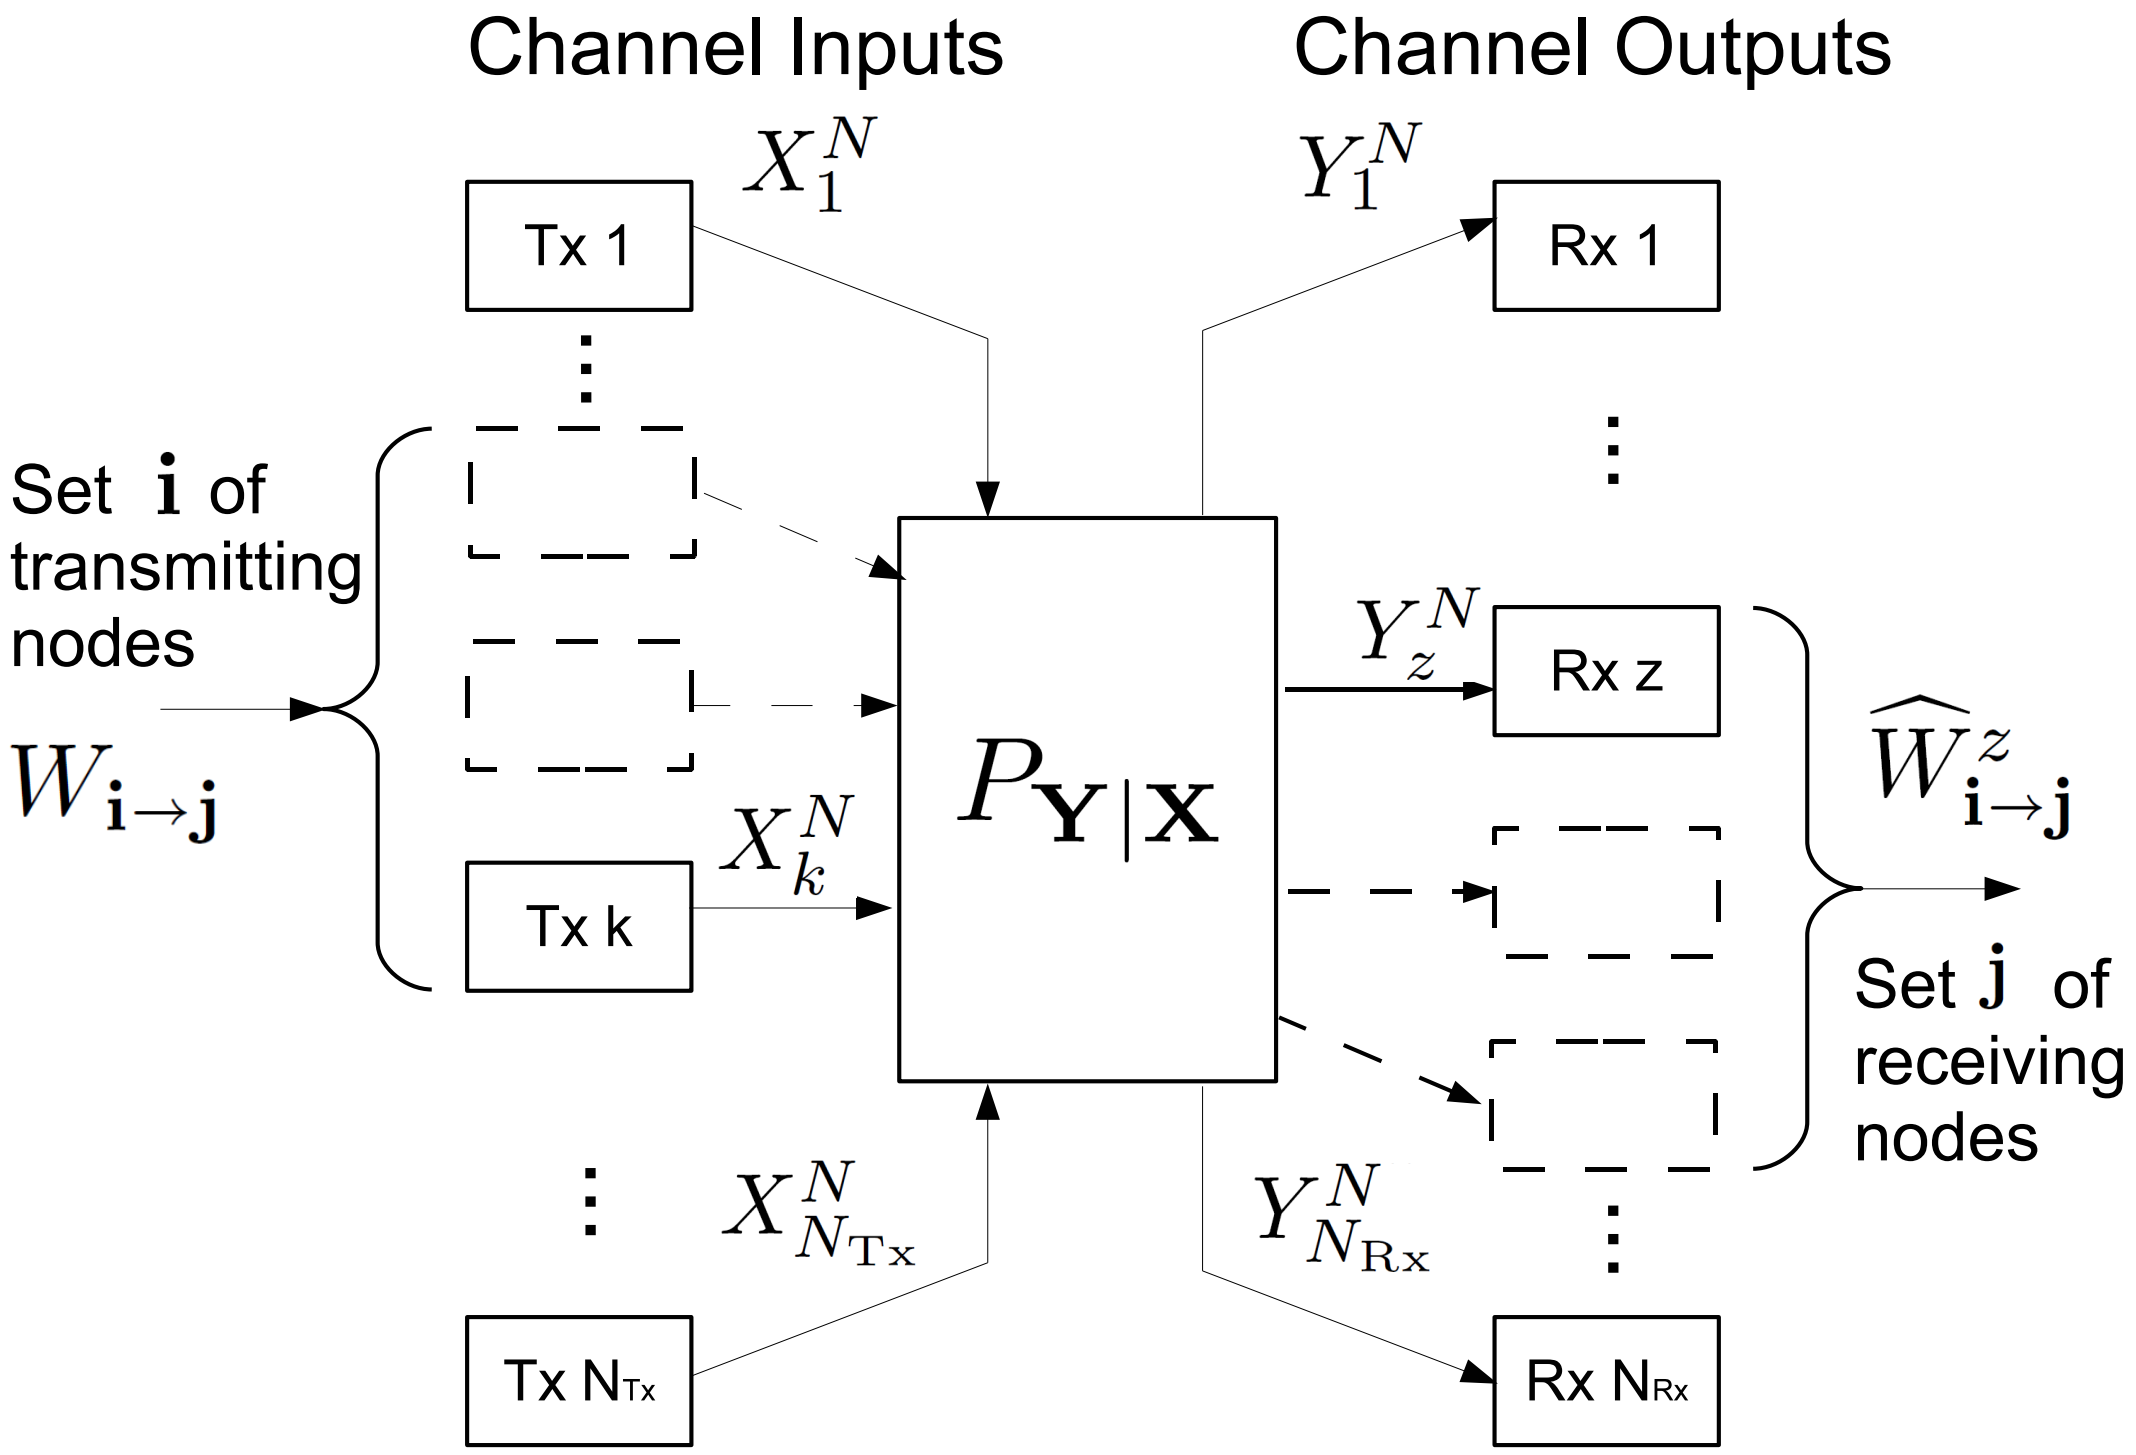
Channel Inputs
Channel Outputs
X_1^N
Tx 1
Set $\mathbf{i}$ of transmitting nodes
$W_{\mathbf{i}\to\mathbf{j}}$
X_k^N
Tx k
$X_{N_{\mathrm{Tx}}}^N$
Tx N_{Tx}
$P_{\mathbf{Y}|\mathbf{X}}$
Y_1^N
Rx 1
Y_z^N
Rx z
$\widehat{W}_{\mathbf{i}\to\mathbf{j}}^z$
Set $\mathbf{j}$ of receiving nodes
$Y_{N_{\mathrm{Rx}}}^N$
Rx N_{Rx}

Fig. 1. The general cognitive multi-terminal network.

TABLE III
SPECIFIC SUBCASES OF THE GENERAL INTERFERENCE CHANNEL

subcase	channel model
$\mathcal{C}(\{R_{1\to1}\})$	point-to-point
$\mathcal{C}(\{R_{1\to1}, R_{2\to1}\})$	MAC
$\mathcal{C}\left(\{R_{1\to1}, R_{2\to1}, R_{\{1,2\}\to1}\}\right)$	MAC with common message
$\mathcal{C}(\{R_{1\to1}, R_{1\to2}\})$	BC
$\mathcal{C}\left(\{R_{\{1,2\}\to1}, R_{\{1,2\}\to2}\}\right)$	BC
$\mathcal{C}\left(\{R_{1\to1}, R_{1\to2}, R_{1\to\{1,2\}}\}\right)$	BC with common message
$\mathcal{C}(\{R_{1\to1}, R_{2\to2}\})$	IFC
$\mathcal{C}\left(\{R_{1\to1}, R_{2\to2}, R_{\{1,2\}\to\{1,2\}}\}\right)$	IFC with common message
$\mathcal{C}\left(\{R_{1\to1}, R_{\{1,2\}\to2}\}\right)$	CIFC
$\mathcal{C}\left(\{R_{1\to1}, R_{\{1,2\}\to\{1,2\}}\}\right)$	CIFC with degraded message set
$\mathcal{C}\left(\{R_{1\to\{1,2\}}, R_{2\to\{1,2\}}\}\right)$	compound MAC

The general IFC contains a number of classic information theoretical models as a special case: Tab. III lists all subcases of the general IFC that have been studied in literature using the notation in (8). Note there are a total of 2^9 subcases of the general IFC. Of these 2^9 subcases, capacity is known for the 2^3 cases in which only one message is being transmitted. Capacity is also known for the MAC, MAC with common information, and the compound MAC. In all the other subcases capacity is not known in general.

It is interesting to note that, despite the simplicity of this setup, some of the subcases of the general IFC have never been considered in literature. For instance the capacity $\mathcal{C}(\{R_{1\to1}, R_{\{1,2\}\to2}\})$ has never been investigated, although this communication problem is relevant in the study of cognitive networks. We will return to the models in Tab. III in Sec. VI to derive achievable regions for some of these models using a new general achievable scheme that is the topic of this paper.

E. Random Coding Techniques for Achievability

We revise here standard random coding techniques used in the literature for achievability in single-hop networks used without feedback/cooperation: coded-time-sharing, rate-splitting, superposition coding, and binning.

- **Coded Time-Sharing** consists of using different transmission strategies according to a random schedule [11] and allows

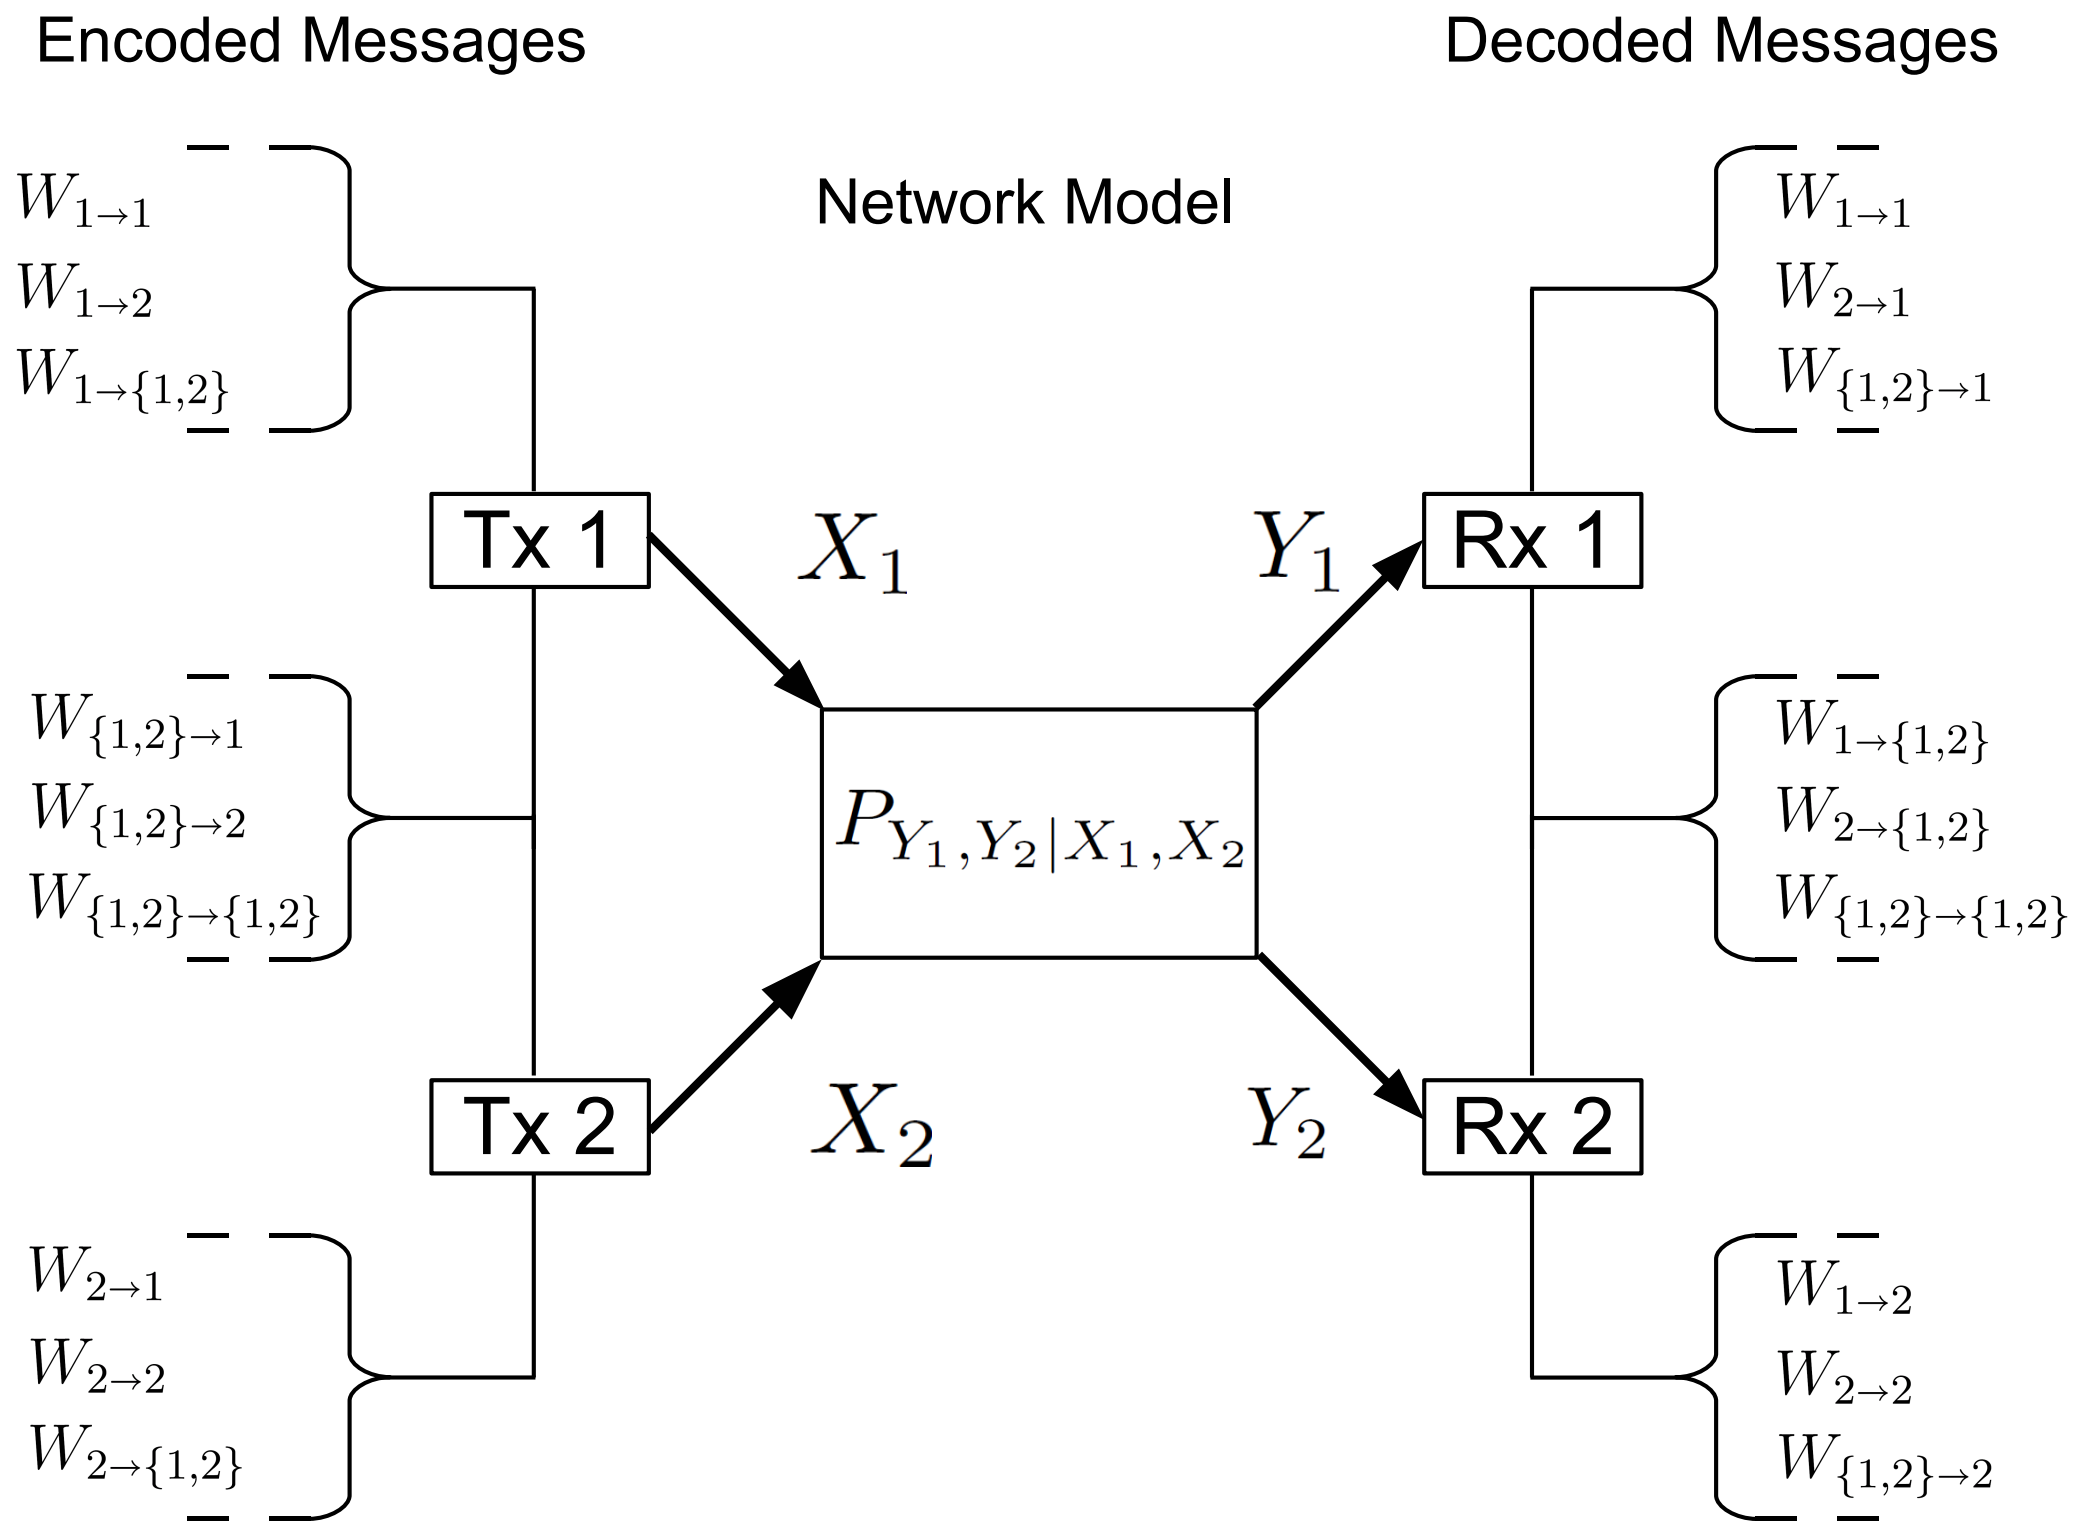

Fig. 2. The general IFC with the most general set of messages amongst transmitters.

one to achieve the convex closure of the set of achievable points and, in some cases, an even larger region [2, pp. 288-290]. Coded time-sharing also includes time multiple access (naive time-sharing) and frequency multiple access as special cases.

Let q^N denote a random instance of the coded time-sharing sequence Q^N generated according to the distribution

$$P_Q^N(q^N) = \prod_{i=1}^{N} P_Q(q_i), \tag{9}$$

and let q^N be revealed to all the encoders and decoders in the network. In coded time-sharing the users generate multiple random codebooks conditioned on the value of the sequence q^n and choose their transmission strategy according to this random outcome.

Coded time-sharing outperforms naive time-sharing and consists of using different transmission schemes for different fractions of time. As before, let q^N denote a random instance of the time-sharing sequence Q^N generated according to the distribution in (9), and let q^N be revealed to all the encoders and decoders in the network. Moreover let $\mathbf{R}_j$ denote the rate achievable under the strategy j. In naive time-sharing the achievable strategy j is used at time i if $q_i = j$: with this time-sharing strategy it is possible to achieve the region

$$\mathbf{R} = \sum_{j\in\mathcal{Q}} \mathbb{P}[Q=j]\mathbf{R}_j.$$

Taking the union over all the possible distribution of Q, naive time-sharing achieves the convex closure of the achievable regions R_q.

- **Rate-Splitting** corresponds to dividing a message $W_{\mathbf{i}\to\mathbf{j}}$ into a set of sub-messages $\{W_{\mathbf{i}'\to\mathbf{j}'}\}$ where $\mathbf{j} \subset \mathbf{j}'$ and $\mathbf{i} \supset \mathbf{i}'$, that is, in sub-messages that are encoded by a smaller subset of transmitters and decoded at a larger set of receivers than the original message. Increasing the number of messages to be transmitted over the channel also increases the number of transmission strategies available at the encoders [11]. This can potentially result in a larger achievable region with respect to the original problem, as it makes it possible to implement more complex communication strategies.

Let $W_{\mathbf{l}\to\mathbf{m}}^{[\mathbf{i}\to\mathbf{j}]}$ indicate that sub-message $W_{\mathbf{l}\to\mathbf{m}}$ obtained by splitting the message $W_{\mathbf{i}\to\mathbf{j}}$, then the message $W_{\mathbf{i}\to\mathbf{j}}$ can be split in a sequence of sub-messages $W_{\mathbf{l}\to\mathbf{m}}^{[\mathbf{i}\to\mathbf{j}]}$ for every $(\mathbf{l},\mathbf{m})$ such that

$$\mathbf{j} \subset \mathbf{m} \text{ and } \mathbf{i} \supset \mathbf{l}. \tag{10}$$

The sub-messages $W_{\mathbf{l}\to\mathbf{m}}^{[\mathbf{i}\to\mathbf{j}]}$ are uniformly distributed over the interval $[0\ldots 2^{NR_{\mathbf{l}\to\mathbf{m}}^{[\mathbf{i}\to\mathbf{j}]}}-1]$ so that

$$R'_{\mathbf{i}\to\mathbf{j}} = \sum_{(\mathbf{l},\mathbf{m}),\ (10)} R_{\mathbf{l}\to\mathbf{m}}^{[\mathbf{i}\to\mathbf{j}]} = \sum_{(\mathbf{l},\mathbf{m}),\ (10)} \gamma_{\mathbf{l}\to\mathbf{m}}^{[\mathbf{i}\to\mathbf{j}]} R_{\mathbf{i}\to\mathbf{j}},$$

for

$$\gamma_{\mathbf{l}\to\mathbf{m}}^{[\mathbf{i}\to\mathbf{j}]} = \frac{R_{\mathbf{l}\to\mathbf{m}}^{[\mathbf{i}\to\mathbf{j}]}}{R_{\mathbf{i}\to\mathbf{j}}}, \qquad \sum_{(\mathbf{l},\mathbf{m}),\ (10)} \gamma_{\mathbf{l}\to\mathbf{m}}^{[\mathbf{i}\to\mathbf{j}]} = 1, \tag{11}$$

where $R'_{\mathbf{i}\to\mathbf{j}}$ is the rate of the RV $W_{\mathbf{i}\to\mathbf{j}}$ in the original channel and $R_{\mathbf{i}\to\mathbf{j}}$ in the rate of the RV $W_{\mathbf{i}\to\mathbf{j}}$ in the channel after rate-splitting has been applied.

Rate-splitting effectively transforms the problem of achieving a rate vector $\mathbf{R}$ into the problem of achieving the rate vector $\mathbf{R}'$ such that

$$\mathbf{R}' = \Gamma\mathbf{R}, \tag{12}$$

and where the matrix Γ in (11) is defined as

$$\Gamma_{(\mathbf{i},\mathbf{j})\times(\mathbf{l},\mathbf{m})} = \gamma_{\mathbf{l}\to\mathbf{m}}^{[\mathbf{i}\to\mathbf{j}]}.$$

Rate-splitting is useful in the cases where it allows to increase the number of messages in the channel, thus effectively increasing the viable transmission strategies. Rate-splitting is sometimes also useful for those channels in which it does not increase the messages to be transmitted but for a different reason. Consider the BC with common information of [35], $\mathcal{C}(\{R_{1\to\{1,2\}}, R_{1\to 1}, R_{1\to 2}\})$, and assume that the rate vector $\overline{\mathbf{R}}$ is achievable. From the achievability of $\overline{\mathbf{R}}$ one also deduces that the rate vector

$$\widetilde{\mathbf{R}} = (\alpha_0 \overline{R}_{1\to\{1,2\}}, \overline{R}_{1\to 1} + \alpha_1 \overline{R}_{1\to\{1,2\}}, \overline{R}_{1\to 2} + \alpha_2 \overline{R}_{1\to\{1,2\}}) \tag{13}$$

is achievable for any α_0, α_1 and α_2 such that $\alpha_0+\alpha_1+\alpha_2=1$. This is because parts of the messages $W_{1\to 1}$ and $W_{1\to 2}$, decoded only at decoder 1 and 2 respectively, can be encoded with the message $W_{1\to\{1,2\}}$ which is decoded at both receivers. With this consideration one can increase the achievable region of a given scheme, especially in those scenarios where the rate of the message $W_{1\to 1}$ is limited by the interference created by the message $W_{1\to 2}$ and vice versa. The operation in (13) is a form of time-sharing but, depending on the complexity of the achievable region, it is sometimes easier to interpret it as an operation that enlarges the overall achievable region, regardless of the specific achievable scheme involved.

• **Superposition Coding** can be intuitively thought of as stacking codewords on top of each other [30]. The "base" codewords are decoded first and stripped from the received signal so as to reduce the interference when decoding the "top" codewords. In superposition coding a different top codebook is generated for each base codeword and the codewords in the top codebook have a conditional distribution that depends on the specific base codeword. Since top codewords are generated according to a probability distribution conditioned on the base codeword, superposition coding increases the error performance of the code. If the top codewords were created independently from the base codewords, the joint distribution among each base codeword and each top codeword would not change with a decoding error, thus resulting in more errors.

Superposition coding is useful in broadcasting two messages to two sets of receivers $\mathbf{j}$ and $\mathbf{m}$ where $\mathbf{m}\subset\mathbf{j}$ by having the codeword for the set $\mathbf{j}$ superposed to the codeword for the set $\mathbf{m}$. The users in the set $\mathbf{j}$ only decode the base codeword while the users in the set $\mathbf{m}$ decode the base codeword first and, using the knowledge of the base codeword, decode the top codeword.

Let $U_{\mathbf{l}\to\mathbf{m}}$ be the RV with distribution $P_{U_{\mathbf{l}\to\mathbf{m}}}$ carrying the message $W'_{\mathbf{l}\to\mathbf{v}}$ and the RV $U_{\mathbf{i}\to\mathbf{j}}$ carrying the message $W'_{\mathbf{i}\to\mathbf{j}}$ be superposed to the RV $U_{\mathbf{l}\to\mathbf{m}}$. A different top codebook is associated to each base codeword $U_{\mathbf{i}\to\mathbf{j}}^N = u_{\mathbf{i}\to\mathbf{j}}^N$ and the codewords $U_{\mathbf{i}\to\mathbf{j}}^N$ in each of these codebooks are generated according to the distribution $P_{U_{\mathbf{i}\to\mathbf{j}}|U_{\mathbf{l}\to\mathbf{m}}=u_{\mathbf{l}\to\mathbf{m}}}$.

Superposition of one RV $U_{\mathbf{i}\to\mathbf{j}}$ over another RV $U_{\mathbf{l}\to\mathbf{m}}$ can be performed when the following two conditions hold:

- $\mathbf{l}\subseteq\mathbf{i}$: that is the bottom message is encoded by a larger set of encoders than the top message.
- $\mathbf{m}\subseteq\mathbf{j}$: that is the bottom message is decoded by a larger set of decoders than the top message.

If $U_{\mathbf{i}\to\mathbf{j}}$ is superposed to $U_{\mathbf{l}\to\mathbf{m}}$ and $U_{\mathbf{v}\to\mathbf{t}}$ is superposed to $U_{\mathbf{l}\to\mathbf{m}}$, than $U_{\mathbf{i}\to\mathbf{j}}$ is also superposed to $U_{\mathbf{v}\to\mathbf{t}}$. Similarly, if $U_{\mathbf{i}\to\mathbf{j}}$ is superposed to $U_{\mathbf{l}\to\mathbf{m}}$, then the reverse cannot hold. The binary relation *"A is superposed to B"* therefore establishes a partial ordering amongst the encoding RVs denoted by $A \lessdot B$.

• **Binning** is sometimes referred to as Cover's random binning [4] Gel'fand-Pinsker coding [5], and allows a transmitter to "pre-cancel" (portions of) the interference known to be experienced at a receiver. This is done by generating a codebook that has a larger number of codewords than the rate of the associated message so that the transmitted codeword can be chosen according to the specific value of the interference. With the appropriate choice of conditional distribution between the message and the interference, the encoder can reduce the effect of the interference at the intended decoder. Although in the original setting of [5] the interference is a random process, this technique can be extended to the case where the interference is a different user's codewords. In the Gaussian channels [30] and deterministic or semi-deterministic channels [19], binning can completely pre-cancel the effect of the interference on the channel output. In the Gel'fand-Pinsker problem this result is known as Costa's "writing on dirty paper" [36].

Binning is useful in broadcasting two messages to two sets of receivers $\mathbf{j}$ and $\mathbf{m}$ where $\mathbf{m} \cap \mathbf{j} = \emptyset$ by having the codeword for the set of receivers $\mathbf{m}$ binned against the codewords for receivers $\mathbf{j}$ or vice versa.

Let again $U_{\mathbf{l} \to \mathbf{m}}$ be the RV with distribution $P_{U_{\mathbf{l} \to \mathbf{m}}}$ carrying the message $W'_{\mathbf{l} \to \mathbf{v}}$ and the RV $U_{\mathbf{i} \to \mathbf{j}}$ carrying the message $W'_{\mathbf{i} \to \mathbf{j}}$ be binned against the RV $U_{\mathbf{l} \to \mathbf{m}}$. The codewords $U^N_{\mathbf{i} \to \mathbf{j}}$ are generated independently from the codewords $U^N_{\mathbf{l} \to \mathbf{m}}$ but chosen so to look as if generated according to the distribution $P_{U_{\mathbf{i} \to \mathbf{j}} | U_{\mathbf{l} \to \mathbf{m}}}$. In order to find a codeword $U^N_{\mathbf{i} \to \mathbf{j}}$ that appears to have the desired marginal distribution, it is necessary to produce more codewords than the rate of message $W_{\mathbf{i} \to \mathbf{j}}$, $2^{N R_{\mathbf{i} \to \mathbf{j}}}$, and the number of excess codewords depends on the joint distribution $P_{U_{\mathbf{i} \to \mathbf{j}}, U_{\mathbf{l} \to \mathbf{m}}}$. The RV $U_{\mathbf{i} \to \mathbf{j}}$ can be binned against the RV $U_{\mathbf{l} \to \mathbf{m}}$ when

- $\mathbf{i} \subseteq \mathbf{l}$: that is, the set of encoders performing binning has knowledge of the interfering codeword

Note that if $U_{\mathbf{i} \to \mathbf{j}}$ can be binned against $U_{\mathbf{i} \to \mathbf{m}}$, then $U_{\mathbf{i} \to \mathbf{j}}$ can also be binned against $U_{\mathbf{i} \to \mathbf{m}}$, regardless of the value of $\mathbf{j}$ and $\mathbf{m}$. This is commonly referred to as "joint binning" [37]. The relationship *"A can be binned against B"* is transitive and symmetric for the RV known at the same set of decoders. In the following "binning $U_{\mathbf{i} \to \mathbf{j}}$ against the RV $U_{\mathbf{l} \to \mathbf{m}}$" is indicated as $U_{\mathbf{i} \to \mathbf{j}} \lessdot U_{\mathbf{l} \to \mathbf{m}}$. For ease of notation, we introduce the following short hand notation for joint binning: $A \lessdot\gtrdot B \iff A \lessdot B,\ B \lessdot A$.

By combining these four encoding techniques one can design an achievability scheme with specific characteristics. Although the code design detailed above is fully general, some coding choices result in an ill-defined construction. Consider for instance the code

$$U_{1 \to 1} \lessdot U_{1 \to 2} \lessdot U_{1 \to \{1,2\}} \lessdot U_{1 \to 1}.$$

In this case it is not possible to define a joint probability distribution for $U_{1 \to 1}, U_{1 \to 2}, U_{1 \to \{1,2\}}$ because of the cyclic dependency between the RVs. We address this issue in the next section.

III. THE CHAIN GRAPH REPRESENTATION OF A GENERAL ACHIEVABLE SCHEMES

The elements included in the random coding construction of Sec. II-E may be compactly represented using the following graph $\mathcal{G}(V, E)$:

- every vertex $v = (\mathbf{i}, \mathbf{j}) \in V \subset \mathfrak{P}(N_{\mathrm{TX}}) \times \mathfrak{P}(N_{\mathrm{RX}})$ of the $\mathcal{G}$ is associated to the RV $U_{\mathbf{i} \to \mathbf{j}}$ carrying the message $W'_{\mathbf{i} \to \mathbf{j}}$ at rate $R'_{\mathbf{i} \to \mathbf{j}}$ obtained through the rate-splitting matrix Γ from rate vector $\mathbf{R}$ as in (11),
- the set of edges E connecting the vertices in V contains two subsets $\boldsymbol{S}$ and $\boldsymbol{B}$ such that $E = \boldsymbol{S} \cup \boldsymbol{B}$ and $\boldsymbol{S} \cap \boldsymbol{B} = \emptyset$
- the vertex $U_{\mathbf{i} \to \mathbf{j}}$ is connected with $U_{\mathbf{l} \to \mathbf{m}}$ by a directed edge of type $\boldsymbol{S}$ (for *superposition*), if $U_{\mathbf{l} \to \mathbf{m}} \overline{<} U_{\mathbf{i} \to \mathbf{j}}$ (solid line).
- the vertex $U_{\mathbf{i} \to \mathbf{j}}$ is connected with $U_{\mathbf{v} \to \mathbf{t}}$ by a directed edge of type $\boldsymbol{B}$ (for *binning*), if $U_{\mathbf{v} \to \mathbf{t}} \lessdot U_{\mathbf{i} \to \mathbf{j}}$ (dotted line).

Since $\overline{<}$ is a transitive relationship, it is convenient to omit the edges of type $\boldsymbol{S}$ that are implied by transitivity when representing $\mathcal{G}$. The coded time-sharing RV Q is not represented in this graph as it is assumed that each RV is generated according to a marginal distribution that depends on Q; the overall achievable region may then be obtained considering the union over all the possible distributions of Q.

The graph representation of the achievable scheme is particularly useful in deriving the joint distribution of the coding RVs $U_{\mathbf{i} \to \mathbf{j}}$ in a general scheme involving superposition coding and binning as described in Sec. II. When trying to determine this distribution, superposition coding and binning effectively result in allowing for any joint distribution among the connected RVs. In the following we detail how the graph $\mathcal{G}(V, E)$ can be used to describe the dependency structure of the codewords of an achievable scheme for a general multi-terminal network. Graphs representing conditional dependencies among RVs have been extensively studied in the literature in the field of graphical Markov models [38], [39], [27]. In the following we briefly introduce three graphical Markov models and describe how this modeling tool can be used to describe the joint distribution among codewords in a general achievable scheme.

A. Graphical Markov Models

In graphical Markov models, the vertices V of the graph $\mathcal{G}(V, E)$ represents a set of RVs while an edge between two vertices indicates the absence of conditional independence among the two RVs. More formally, given a graph $\mathcal{G}(V, E)$, a graphical Markov model is obtained by defining a joint probability distribution $P(V)$ on the product probability space

$$\mathcal{X} = \bigtimes_{U_k \ \in \ V} \mathcal{X}_{U_k},$$

such that $P(V)$ is *global G-markovian*, that is

$$A, B \in V, \ A \perp B \mid S[P], \tag{14}$$

for any set of nodes S that separates A and B. [2].

---

[2] Other definitions of Markov model are possible. We present only this definition for the sake of space. See [27] for a more complete introduction to graphical Markov models.

Not every graph can be used to define a graphical Markov model: among the suitable graphs, three classes commonly studied are:

- **UDG:** An UnDirected Graph is a graph were all the edges are undirected.
- **ADG:** An Acyclic DiGraph is a graph were all the edges are directed and there is no directed cycle[3].
- **Chain graphs:** A chain graph is a graph with both directed and undirected edges but that contains no directed cycles.

ADGs provide a convenient and recursive factorization of the probability distribution $P(V)$ using parent nodes which allows one to calculate the joint distribution of any subset of nodes of V. ADGs do not uniquely represent $P(V)$, that is, multiple ADGs can describe the same joint probability distribution. ADGs are often used in Bayesian inference to represent causal relationships by having the edges represent a causal relationship the connected RVs.

Unlike ADGs, UDGs generally do not allow a simple factorization of the probability distributions $P(V)$. On the other hand, a UDG is uniquely determined by its associated Markov models. A convenient factorization of the joint distribution for UDGs is available for the class of *decomposable* UDGs, where the joint distribution can be factorized over the cliques of the graph.

Chain graphs encompass both ADG and UDG and therefore are a more general modeling tool. Chain graphs are also an important tool with which to understand the relationship between the two models: ADG and UDG both represent a joint probability distribution $P(V)$ and it is not always clear when a UDG is *equivalent* to an ADG, that is when they represent the same joint probability distribution. Studying the equivalence among chain graphs is useful in understanding the equivalence between the two specific subclasses.

Unfortunately they do not allow for a general factorization of the joint distribution $P(V)$ as ADGs and are not uniquely associated to a Markov model as UDGs. Despite this, chain graphs are useful when studying the relationship between different models: by establishing when an ADG or a UDG is equivalent to chain graphs, one can understand the underlying relationship between Markov models and their graph representation.

The graph representation of a general achievable region presented at the beginning of this section corresponds to a chain graph. Superposition coding and binning both corresponds to directed edges that indicate that the distribution of $U_{\mathbf{l}\to\mathbf{w}}$ depends on $U_{\mathbf{i}\to\mathbf{j}}$ for both $U_{\mathbf{l}\to\mathbf{w}} \overline{<} U_{\mathbf{i}\to\mathbf{j}}$ or $U_{\mathbf{l}\to\mathbf{w}} \lessdot U_{\mathbf{i}\to\mathbf{j}}$. Undirected edges can be obtained in one of two ways:

- joint binning: $U_{\mathbf{i}\to\mathbf{j}} \lessdot U_{\mathbf{l}\to\mathbf{m}}$ and $U_{\mathbf{l}\to\mathbf{m}} \lessdot U_{\mathbf{i}\to\mathbf{j}}$
- superposition coding and binning in the reverse direction $U_{\mathbf{i}\to\mathbf{j}} \overline{<} U_{\mathbf{l}\to\mathbf{m}}$ and $U_{\mathbf{l}\to\mathbf{m}} \lessdot U_{\mathbf{i}\to\mathbf{j}}$

A schematic representation of the graphical Markov model associated with the graph $\mathcal{G}(V,E)$ is presented in Fig. 3: each vertex $(\mathbf{i},\mathbf{j})$ is associated with a corresponding message $W'_{\mathbf{i}\to\mathbf{j}}$, a rate-splitting equation and an auxiliary RV $U_{\mathbf{i}\to\mathbf{j}}$ with distribution $P_{U_{\mathbf{i}\to\mathbf{j}}|Q}$ according to which the codebook is generated. The vertex $(\mathbf{i},\mathbf{j})$ can be connected to a vertex $(\mathbf{l},\mathbf{m})$ by two types of edges: a superposition edge ***S*** and a binning edge ***B***; both edges indicate the Markov dependency between $U_{\mathbf{i}\to\mathbf{j}}$ and $U_{\mathbf{l}\to\mathbf{m}}$ given Q.

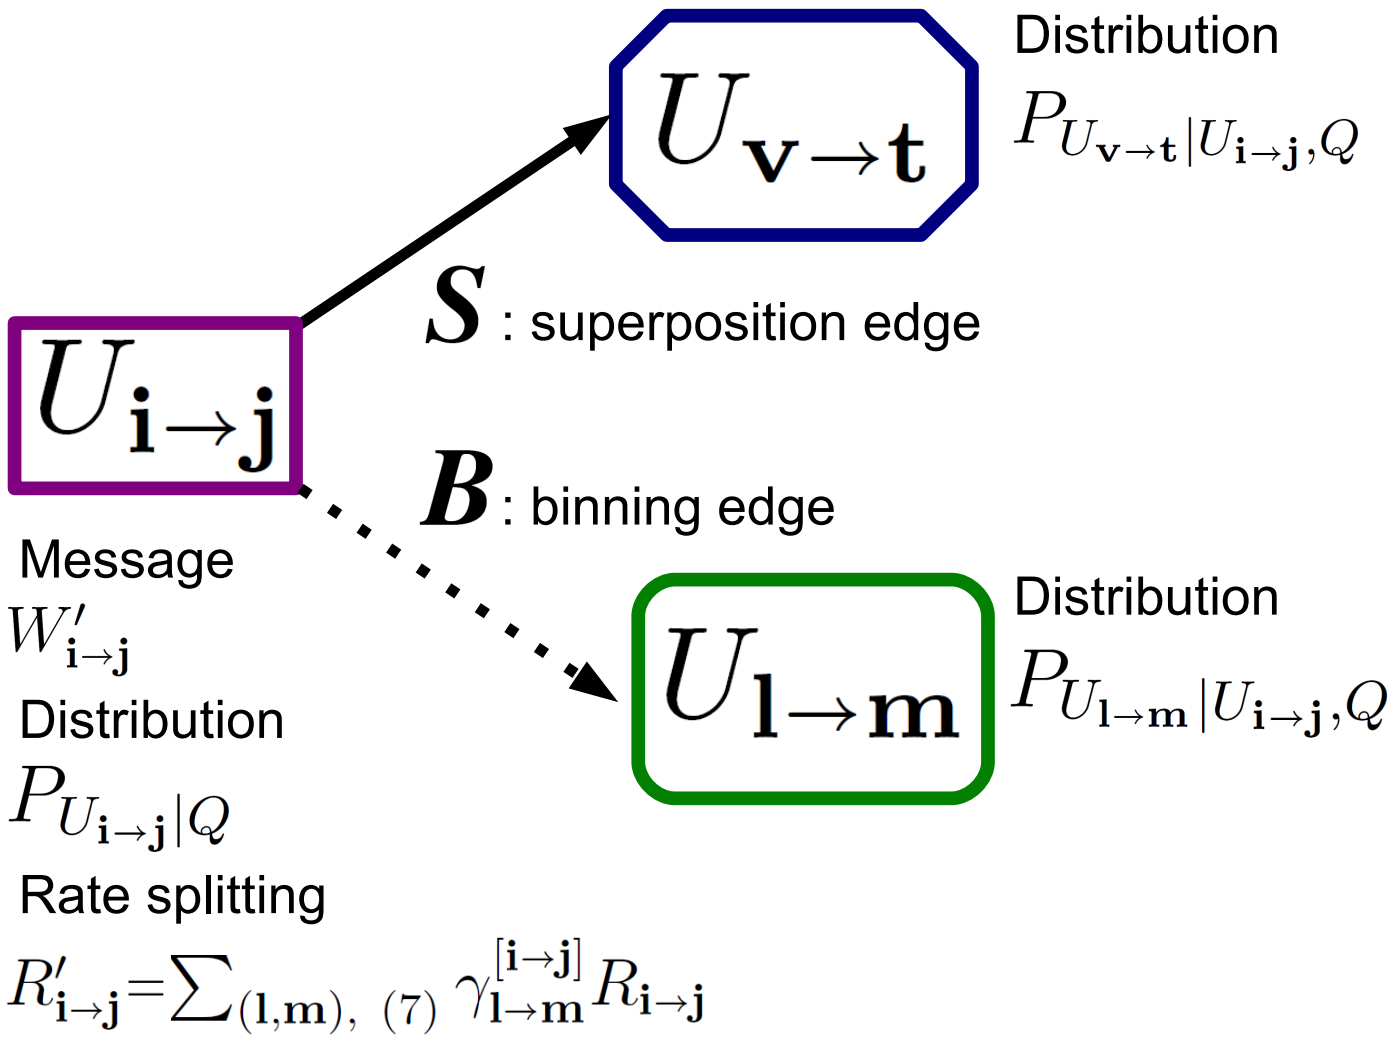
$U_{\mathbf{v}\to\mathbf{t}}$
Distribution
$P_{U_{\mathbf{v}\to\mathbf{t}}|U_{\mathbf{i}\to\mathbf{j}},Q}$
$\boldsymbol{S}$: superposition edge
$U_{\mathbf{i}\to\mathbf{j}}$
$\boldsymbol{B}$: binning edge
Message
$W'_{\mathbf{i}\to\mathbf{j}}$
Distribution
$P_{U_{\mathbf{i}\to\mathbf{j}}|Q}$
$U_{\mathbf{l}\to\mathbf{m}}$
Distribution
$P_{U_{\mathbf{l}\to\mathbf{m}}|U_{\mathbf{i}\to\mathbf{j}},Q}$
Rate splitting
$R'_{\mathbf{i}\to\mathbf{j}}=\sum_{(\mathbf{l},\mathbf{m}),\ (7)} \gamma_{\mathbf{l}\to\mathbf{m}}^{[\mathbf{i}\to\mathbf{j}]} R_{\mathbf{i}\to\mathbf{j}}$

Fig. 3. A schematic representation of the graph in Sec. III .

---

[3] Sometimes also referred as Acyclic Directed Graph (DAG). We adopt this nomenclature from [27].

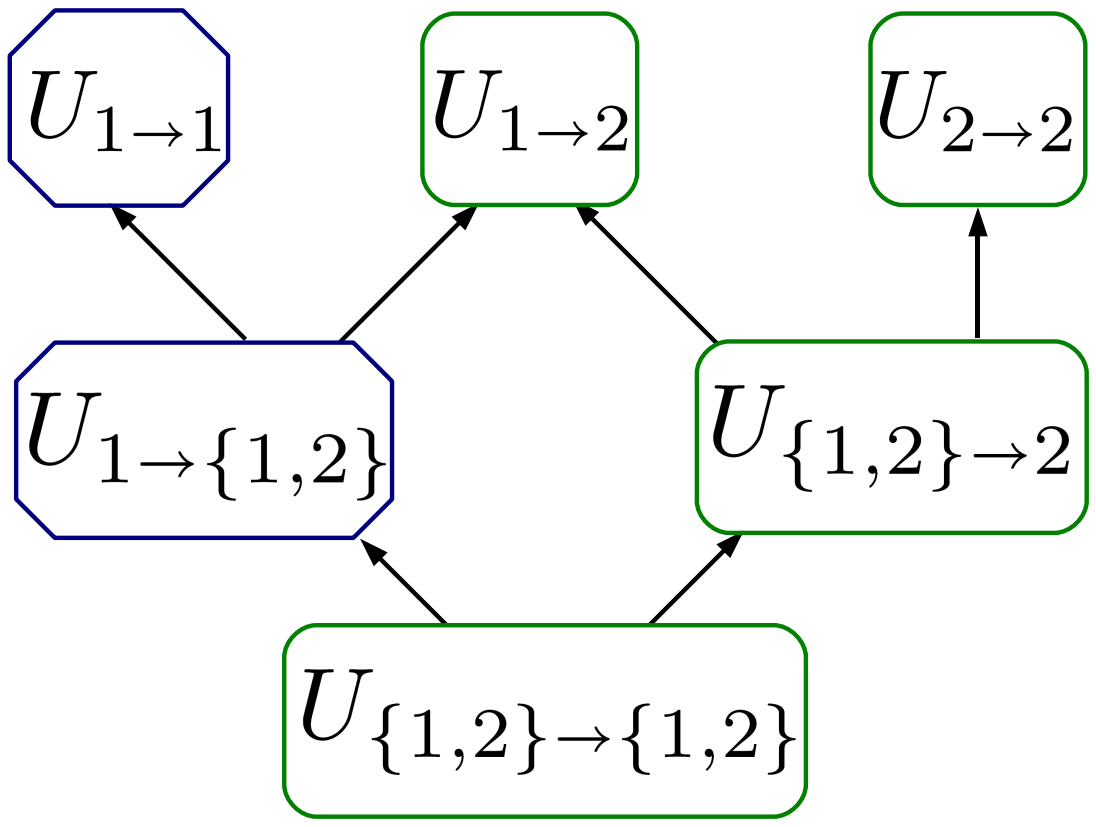

Fig. 4. The graph representation of an achievable scheme in Section III-A1 based on superposition coding for the CIFC.

1) Graph Representation of an Achievable Schemes based on Superposition Coding: The Markov graph representing an achievable scheme employing only superposition coding, rate-splitting, and coded time-sharing, is an ADG. The superposition step corresponds to a direct edge in the graph representation and since the relationship $\overline{<}$ is a partial order relationship, no cycles or undirected edges can occur in the graph.

For an ADG it is possible to write the factorization of the joint distribution using the parent nodes, that is,

$$P(V) = \prod_{U_k \in V} P_{U_k|\mathrm{pa(U_k)}}, \tag{15}$$

where $\mathrm{pa(U_k)}$ indicates the parent nodes of U_k, that is the set of all the nodes connected to U_k by a direct edge.

This implies that the joint distribution associated with the graph representation of the general achievable scheme can be written as:

$$P_{\{U_{\mathbf{i}\to\mathbf{j}},\ \forall\ (\mathbf{i},\mathbf{j})\},Q} = P_Q \prod_{(\mathbf{i},\mathbf{j})} P_{U_{\mathbf{i}\to\mathbf{j}}|\ \{U_{\mathbf{l}\to\mathbf{m}},\ U_{\mathbf{i}\to\mathbf{j}}\overline{<}U_{\mathbf{l}\to\mathbf{m}}\},Q}, \tag{16}$$

for any rate-splitting matrix Γ and coded time-sharing RV Q.

As an example of an achievable scheme based on superposition coding, consider the CIFC, $C\left(\{R_{1\to 1}, R_{\{1,2\}\to 1}\}\right)$ with the following rate-splitting matrix:

$$\begin{bmatrix} R'_{1\to 1} \\ R'_{1\to 2} \\ R'_{1\to\{1,2\}} \\ R'_{2\to 2} \\ R'_{\{1,2\}\to 2} \\ R'_{\{1,2\}\to\{1,2\}} \end{bmatrix} = \begin{bmatrix} \gamma_{1\to 1}^{[1\to 1]} & 0 \\ \gamma_{1\to 2}^{[1\to 1]} & \gamma_{1\to 2}^{[\{1,2\}\to 2]} \\ \gamma_{1\to\{1,2\}}^{[1\to 1]} & 0 \\ 0 & \gamma_{\{1,2\}\to 2}^{[\{1,2\}\to 2]} \\ 0 & \gamma_{\{1,2\}\to\{1,2\}}^{[\{1,2\}\to 2]} \end{bmatrix} \cdot \begin{bmatrix} R_{1\to 1} \\ R_{\{1,2\}\to 2} \end{bmatrix} \tag{17}$$

and the achievable scheme involving only superposition:

$$U_{\{1,2\}\to 2}\overline{<}U_{\{1,2\}\to\{1,2\}}, \tag{18a}$$

$$U_{2\to 2}\overline{<}U_{\{1,2\}\to 2}, \tag{18b}$$

$$U_{1\to 2}\overline{<}U_{\{1,2\}\to 2}, \tag{18c}$$

$$U_{1\to 1}\overline{<}U_{1\to\{1,2\}}. \tag{18d}$$

The achievable scheme in (18) corresponds to the graph representation in Fig. 4: the solid lines represent the ***S*** edges associated with superposition coding but the edges that are implied by the transitivity of the relationship $\overline{<}$ have been omitted from the plot. The blue, rhomboidal nodes carry a rate-split of the $W_{1\to 1}$ message while the green, square ones of the message $W_{\{1,2\}\to 2}$.

From the graph representation of the achievable scheme in Fig. 4 it is possible to quickly derive the joint distribution of the RVs $U_{\mathbf{i}\to\mathbf{j}}$ as

$$
\begin{aligned}
& P_{\left\{U_{\{1,2\}\to\{1,2\}}, U_{\{1,2\}\to 1} U_{\{1,2\}\to 2} U_{1\to 1} U_{1\to 2} U_{2\to 2}\right\}} = && \text{(19a)}\\
& \quad P_{U_{\{1,2\}\to\{1,2\}}} && \text{(19b)}\\
& \quad P_{U_{1\to\{1,2\}}|U_{\{1,2\}\to\{1,2\}}} && \text{(19c)}\\
& \quad P_{U_{\{1,2\}\to 2}|U_{\{1,2\}\to\{1,2\}}} && \text{(19d)}\\
& \quad P_{U_{1\to 1}|U_{1\to\{1,2\}}, U_{\{1,2\}\to\{1,2\}}} && \text{(19e)}\\
& \quad P_{U_{2\to 2}|U_{\{1,2\}\to 2}, U_{\{1,2\}\to\{1,2\}}} && \text{(19f)}\\
& \quad P_{U_{1\to 2}|U_{1\to\{1,2\}}, U_{\{1,2\}\to 2}, U_{\{1,2\}\to\{1,2\}}}. && \text{(19g)}
\end{aligned}
$$

2) Graph Representation of an Achievable Schemes based on Joint Binning: The Markov graph representation of an achievable scheme employing only joint binning, rate-splitting, and coded time-sharing is a UDG since the joint binning corresponds to an undirected edge in the graph representation of the achievable scheme.

Unfortunately it is not possible to provide a convenient factorization of the joint probability distribution of a general UDG but only for the class of decomposable UDG. A UDG is decomposable when it can be rewritten as a series of maximal cliques C_i connected by separator sets S_j. A simple way to establish whether a UDG is decomposable is by checking whether it is *chordal*. An UDG is *chordal* if every cycle of length greater than 3 possesses a *chord*, that two non consecutive nodes that are neighbors. Every chordal UDG is also decomposable and vice versa, i.e. the two conditions are equivalent. The joint distribution of a Markov model of a decomposable UDG can be expressed as

$$
P(V) = \frac{\prod_{C_i \in C} P_{\{U_j,\ U_j \in C_i\}}}{\prod_{S_i \in S} P_{\{U_j,\ U_j \in S_i\}}}, \tag{20}
$$

where C is the set of the maximal cliques and S is the set of separators. Another interesting property of decomposable UDG is that they are equivalent to some ADG obtained by choosing the appropriate direction for each edge of the original UDG [27]. With this consideration we can rewrite the joint distribution in (20) using the factorization in (15) for the equivalent ADG. The direction of the edges in the equivalent ADG are obtained using the *moral graph* of the original UDG: we will not introduce this concept here as it is outside the scope of the paper, instead we direct the interested reader to [39].

In general, the graph representation of an achievable scheme involving joint binning in not chordal nonetheless such an achievable scheme can be made chordal by adding a further joint binning step. Consider an achievable scheme where having a cycle of length $n > 3$ and lacks a chord:

$$
U_{\mathbf{i}\to\mathbf{j}_1} \lessdot\ \gtrdot U_{\mathbf{i}\to\mathbf{j}_2} \cdots \lessdot\ \gtrdot U_{\mathbf{i}\to\mathbf{j}_{n-1}} \lessdot\ \gtrdot U_{\mathbf{i}\to\mathbf{j}_n}. \tag{21}
$$

This scheme can be made chordal by adding the joint binning step

$$
U_{\mathbf{i}\to\mathbf{j}_1} \lessdot\ \gtrdot U_{\mathbf{i}\to\mathbf{j}_3}. \tag{22}
$$

This additional encoding step can only enlarge the achievable region, since the original scheme can be reobtained with the appropriate choice of the distribution imposed by the joint binning between $U_{\mathbf{i}\to\mathbf{j}_1}$ and $U_{\mathbf{i}\to\mathbf{j}_3}$.

For this reason, in the remainder of the paper, we will always assume that all the undirected cycles are chordal by assuming that the joint binning relationship $\lessdot\gtrdot$ is transitive, that is

Assumption 1. For all $U_{\mathbf{i}\to\mathbf{j}} \lessdot\ \gtrdot U_{\mathbf{i}\to\mathbf{m}}$ the following holds

$$
U_{\mathbf{i}\to\mathbf{j}} \lessdot\ \gtrdot U_{\mathbf{i}\to\mathbf{m}},\ U_{\mathbf{i}\to\mathbf{m}} \lessdot\ \gtrdot U_{\mathbf{i}\to\mathbf{j}} \implies U_{\mathbf{i}\to\mathbf{m}} \lessdot\ \gtrdot U_{\mathbf{i}\to\mathbf{t}}. \tag{23}
$$

With Assumption 1 the joint distribution associated with the graph representation of the general achievable scheme can be written as:

$$
P_{\{U_{\mathbf{i}\to\mathbf{j}},\ \forall\ (\mathbf{i},\mathbf{j})\},Q} = P_Q \prod_{(\mathbf{i},\mathbf{j})} P_{U_{\mathbf{i}\to\mathbf{j}}|\ \{U_{\mathbf{l}\to\mathbf{m}},\ U_{\mathbf{i}\to\mathbf{j}} \overset{\leftarrow}{\lessdot} U_{\mathbf{l}\to\mathbf{m}}\},Q}, \tag{24}
$$

for any rate-splitting matrix Γ and coded time-sharing RV Q, where $\overset{\leftarrow}{\lessdot}$ is the set of directed edges obtained by converting the undirected edges of the decomposable UDG in the directed edges of the equivalent ADG.

As an example of achievable scheme based on joint binning, consider again the CIFC, $C\left(\{R_{1\to 1}, R_{\{1,2\}\to 1}\}\right)$, with the rate-splitting matrix Γ in (17) and the achievable scheme employing joint binning as follows

$$
\begin{aligned}
U_{1\to\{1,2\}} &\lessdot\ \gtrdot U_{1\to 1} \lessdot\ \gtrdot U_{1\to 2} && \text{(25a)}\\
U_{\{1,2\}\to\{1,2\}} &\lessdot\ \gtrdot U_{\{1,2\}\to 2}. && \text{(25b)}
\end{aligned}
$$

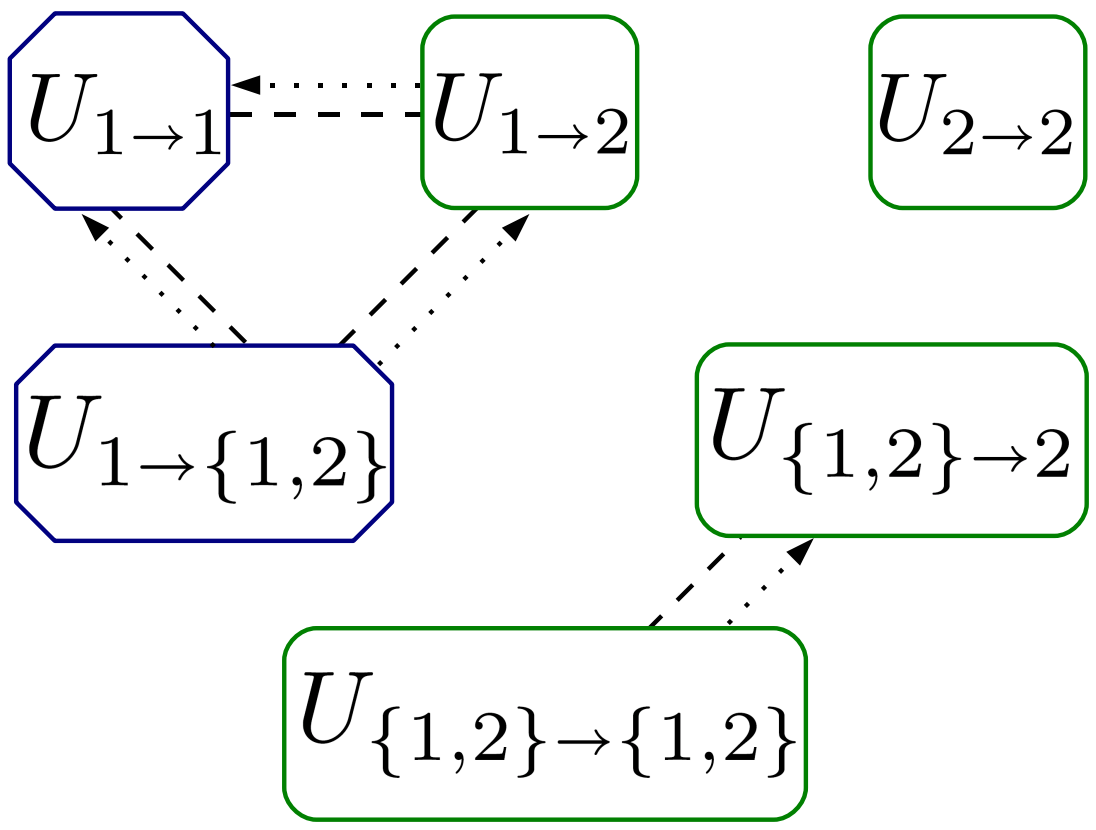

Fig. 5. The graph representation of an achievable scheme in Sec. III-A2 based on joint binning for the CIFC.

The achievable scheme in (25) corresponds to the graph representation in Fig. 5. The dashed lines correspond to the joint binning relationship $\lessdot\gtrdot$ while the dotted lines correspond to the equivalent ADG.

From the graph representation of the achievable scheme in Fig. 5 it is possible to quickly derive the joint distribution of the RVs $U_{\mathbf{i}\to\mathbf{j}}$ as

$$P_{\left\{U_{\{1,2\}\to\{1,2\}},U_{\{1,2\}\to 1}U_{\{1,2\}\to 2}U_{1\to 1}U_{1\to 2}U_{2\to 2}\right\}} = \tag{26a}$$
$$P_{U_{\{1,2\}\to\{1,2\}}} \tag{26b}$$
$$P_{U_{\{1,2\}\to 2}|U_{\{1,2\}\to\{1,2\}}} \tag{26c}$$
$$P_{U_{1\to\{1,2\}}} \tag{26d}$$
$$P_{U_{1\to 2}|U_{1\to\{1,2\}}} \tag{26e}$$
$$P_{U_{1\to 1}|U_{1\to 2}U_{1\to\{1,2\}}} \tag{26f}$$
$$P_{U_{2\to 2}}. \tag{26g}$$

3) Graph Representation of an Achievable Schemes based on Superposition Coding and Binning: After having considered achievable schemes based only on superposition coding, which correspond to an ADG, and some based only on joint binning, which correspond to UDG, we turn our attention to the general case by considering both binning and superposition coding. A chain graph is a graph with both directed and undirected edges and does not contain any directed cycle. To show that the graph representation of a general achievable scheme can indeed be modeled using a chain graph Markov model, no directed cycle can exist in the graph representation. This condition can be obtained with the following assumption

Assumption 2. RVs known at same set of decoders i form do not form directed cycles in the graph representation. If a cycle exists it must be undirected.

Given any achievable scheme, one can always obtain an achievable scheme that satisfies Assumption 2 by adding the binning edges that transform a directed cycle into an indirected cycle. This additional encoding operation can only enlarge the achievable region since the original scheme can be reobtained with the appropriate distribution imposed by the binning step.

Among the class of chain graphs we are particularly interested in is the class that has a Markov equivalent to some ADG, so that we can employ a recursive factorization of the joint probability distribution as in (15). A general achievable scheme corresponds to a chain graph that is ADG equivalent when Assumption 1 holds together with the following assumption.

Assumption 3. RVs that are jointly binned, have the same parent nodes, that is, if $U_{\mathbf{i}\to\mathbf{j}}\lessdot\gtrdot U_{\mathbf{i}\to\mathbf{t}}$ and $U_{\mathbf{l}\to\mathbf{m}}\lessdot U_{\mathbf{i}\to\mathbf{j}}$ or $U_{\mathbf{l}\to\mathbf{m}}\overline{<}U_{\mathbf{i}\to\mathbf{j}}$, than $U_{\mathbf{l}\to\mathbf{m}} \lessdot U_{\mathbf{i}\to\mathbf{t}}$ or $U_{\mathbf{l}\to\mathbf{m}}\overline{<}U_{\mathbf{i}\to\mathbf{t}}$.

As for Assumption 2, given any achievable scheme, it is possible to add further binning edges for Assumption 3 to hold and by doing so one can only obtain a larger achievable scheme.

We summarize the necessary assumptions for a graph representation of a general achievable region to correspond to a chain graph that is equivalent so some ADG in the next theorem.

Theorem III.1. *If Assumptions 1, 2, and 3, hold, the graph representation of a general achievable scheme corresponds to chain graph which is equivalent to some (non-necessarily unique) ADG.*

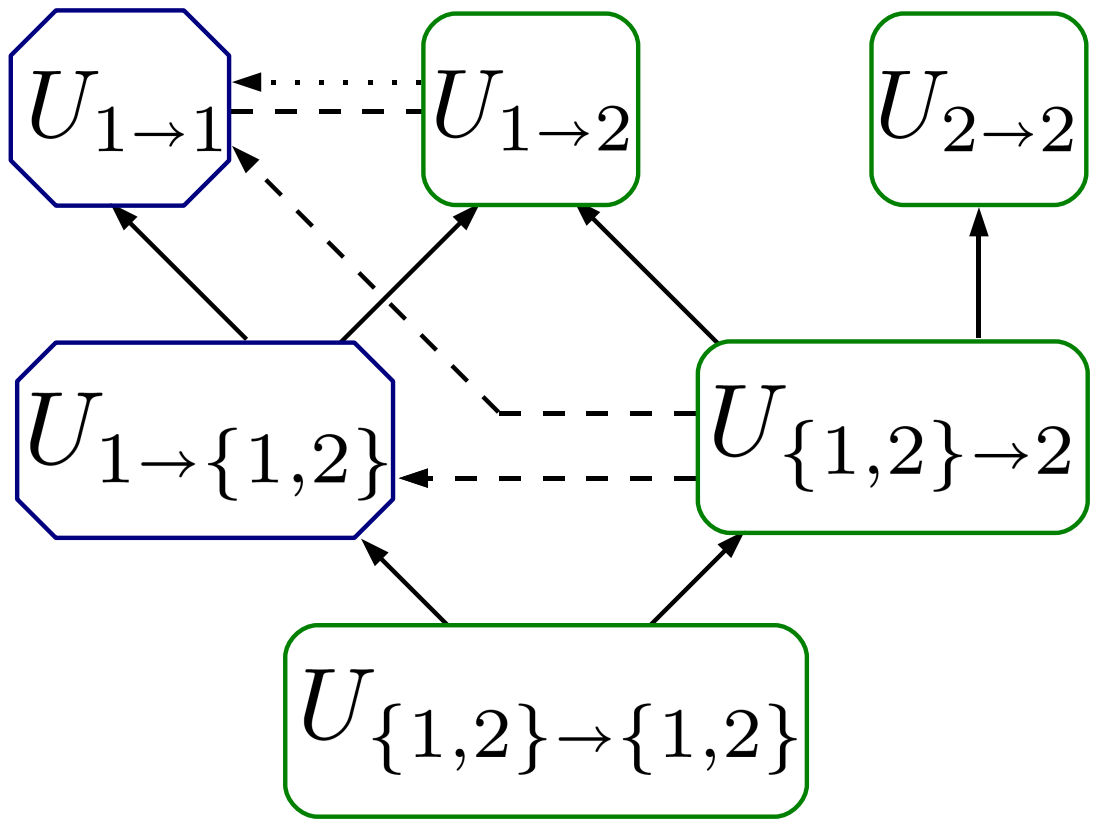

Fig. 6. The graph representation of an achievable scheme in Section III-A3 based on binning and superposition coding for the CIFC.

If an achievable scheme does not satisfy these assumptions, it is possible to add some additional binning edges and obtain a scheme that satisfy such assumptions and has a larger achievable regions.

Proof: Since the proof involves some graph theoretic considerations that are outside the scope of the paper, the complete proof is relegated to App. A.

The main point of the proof is in showing that under the given assumption, joint binning forms connected components, or cliques, that are well connected to the rest of the graph, so that one can pick a direction for these undirect edges and form an equivalent ADG.

■

We refer to a graph representation of an achievable scheme in Th. III.1 as a Chain Graph Representation of an Achievable Scheme (CGRAS).

A modified Maximum Cardinality Search (MCS) algorithm can be used to efficiently construct a Markov equivalent ADG of a CGRAS [27]. Since the edges of the equivalent ADG are generated by orienting undirected edge, the equivalent ADG can be written as $\mathcal{G}(V, \boldsymbol{B\text{-}} \cup \boldsymbol{S})$ for some $\boldsymbol{B\text{-}} \subset \boldsymbol{B}$. The notation $\overleftarrow{\lessdot}$ is used in the following to indicate the edges in ***B-***. With this notation, the joint distribution of a CGRAS can then be factorized as:

$$P_{\{U_{\mathbf{i}\to\mathbf{j}},\ \forall\ (\mathbf{i},\mathbf{j})\}} = \prod_{(\mathbf{i},\mathbf{j})} P_{U_{\mathbf{i}\to\mathbf{j}}|\{U_{\mathbf{l}\to\mathbf{m}},\ U_{\mathbf{i}\to\mathbf{j}}\overline{<}U_{\mathbf{l}\to\mathbf{m}}\ \text{or}\ U_{\mathbf{i}\to\mathbf{j}}\overleftarrow{\lessdot}U_{\mathbf{l}\to\mathbf{m}}\}}. \tag{27}$$

As an example of a CGRAS, consider again the CIFC, $C\left(\{R_{1\to 1}, R_{\{1,2\}\to 1}\}\right)$, with the rate-splitting matrix Γ in (17) and the achievable scheme employing superposition coding:

$$U_{\{1,2\}\to 2}\overline{<}U_{\{1,2\}\to\{1,2\}}, \tag{28a}$$

$$U_{2\to 2}\overline{<}U_{\{1,2\}\to 2}, \tag{28b}$$

$$U_{1\to 2}\overline{<}U_{\{1,2\}\to 2}, \tag{28c}$$

$$U_{1\to 1}\overline{<}U_{1\to\{1,2\}}, \tag{28d}$$

and binning:

$$U_{1\to\{1,2\}}\lessdot U_{\{1,2\}\to 2}, \tag{29a}$$

$$U_{1\to 1}\lessdot U_{\{1,2\}\to 2}, \tag{29b}$$

$$U_{1\to 1} \lessdot \gtrdot U_{1\to 2}. \tag{29c}$$

The graph representation of this achievable region is in Fig. 6; as for Fig. 4 and Fig. 5, the solid lines represent the ***S*** edges, the dashed lines the ***B*** edges and the dotted lines indicate the direction in ***B-*** to be associated with the undirected edges. The solid edges that are implied by the transitivity of the $\overline{<}$ have been omitted from the plot. The blue, rhomboidal nodes carry a rate-split of the $W_{1,1}$ message while the green, square ones of the message $W_{3,2}$.

From the graph representation of the achievable scheme in Fig. 6 it is possible to quickly derive the joint distribution of the RVs $U_{\mathbf{i}\to\mathbf{j}}$ as

$$P_{U_{\{1,2\}\to\{1,2\}},U_{\{1,2\}\to 2},U_{1\to\{1,2\}},U_{1\to 1},U_{1\to 2},U_{2\to 2}} = \tag{30a}$$
$$P_{U_{\{1,2\}\to\{1,2\}}} \tag{30b}$$
$$P_{U_{\{1,2\}\to 2}|U_{\{1,2\}\to\{1,2\}}} \tag{30c}$$
$$P_{U_{1\to\{1,2\}}|U_{\{1,2\}\to\{1,2\}}} \tag{30d}$$
$$P_{U_{2\to 2}|U_{\{1,2\}\to 2},U_{\{1,2\}\to\{1,2\}}} \tag{30e}$$
$$P_{U_{1\to 2}|U_{1\to\{1,2\}},U_{\{1,2\}\to 2},U_{\{1,2\}\to\{1,2\}}} \tag{30f}$$
$$P_{U_{1\to 1}|U_{1\to 2},U_{\{1,2\}\to 2},U_{1\to\{1,2\}},U_{\{1,2\}\to\{1,2\}}}. \tag{30g}$$

The achievable scheme in Fig 6 is a more general scheme than the largest known achievable region for the CIFC in [23]. The scheme we propose here has one more RV than the scheme in [23] – $U_{2\to 2}$. This RV carries a private message between transmitter 2 and receiver 2 that is not encoded at the cognitive encoder. This added RV is considered mostly for illustrative purposes: since the cognitive transmitter cooperates in the transmission of the primary receiver in transmitting $U_{\{1,2\}\to 2}$, one does not expect to have any particular advantage in adding $U_{2\to 2}$ to the achievable scheme in [23].

At decoding, each receiver z decodes a subset of the CGRAS from the channel output z. The structure of the codebook observed at decoder z relates to the subgraph $\mathcal{G}(V^z, \boldsymbol{S}^z \cup \boldsymbol{B}^z)$ where

$$V^z = \{(\mathbf{i},\mathbf{j}) \in V,\ z \in \mathbf{j}\} \tag{31a}$$
$$\boldsymbol{S}^z = \{(\mathbf{i},\mathbf{j}) \times (\mathbf{l},\mathbf{m}) \in \boldsymbol{S},\ z \in \mathbf{j},\ z \in \mathbf{m},\} \tag{31b}$$
$$\boldsymbol{B}^z = \{(\mathbf{i},\mathbf{j}) \times (\mathbf{l},\mathbf{m}) \in \boldsymbol{B},\ z \in \mathbf{j},\ z \in \mathbf{m},\}. \tag{31c}$$

We refer to the $\mathcal{G}(V^z, \boldsymbol{S}^z \cup \boldsymbol{B}^z)$ as the graph representation of a general achievable scheme at decoder z. We would like the graph representation of a general achievable scheme at decoder z to have the same convenient factorization of the joint distribution as the original graph. The next theorem proves that this is indeed the case.

Theorem III.2. *For every receiver z, if Assumptions 1, 2, and 3, hold, the graph representation of a general achievable scheme at decoder z corresponds to chain graph which is equivalent to some (non-necessarily unique) ADG.*

Proof: The proof is provided in App. B. ■

If $\mathcal{G}(V^z, \boldsymbol{S} \cup \boldsymbol{B})$ is a CGRAS, we refer to $\mathcal{G}(V^z, \boldsymbol{S}^z \cup \boldsymbol{B}^z)$ as the CGRAS at decoder z.

For the CGRAS in (30g) the CGRAS at decoder 1 is

$$U_{1\to\{1,2\}} \overline{<} U_{\{1,2\}\to\{1,2\}}, \tag{32a}$$
$$U_{1\to 1} \overline{<} U_{1\to\{1,2\}}, \tag{32b}$$

with distribution

$$P_{U_{1\to 1},U_{1\to\{1,2\}},U_{\{1,2\}\to\{1,2\}}} = \tag{33a}$$
$$P_{U_{\{1,2\}\to\{1,2\}}} P_{U_{1\to\{1,2\}}|U_{\{1,2\}\to\{1,2\}}} P_{U_{1\to 1}|U_{1\to\{1,2\}},U_{\{1,2\}\to\{1,2\}}}, \tag{33b}$$

while the CGRAS at decoder 2 is

$$U_{1\to\{1,2\}} \overline{<} U_{\{1,2\}\to\{1,2\}}, \tag{34a}$$
$$U_{\{1,2\}\to 2} \overline{<} U_{\{1,2\}\to\{1,2\}}, \tag{34b}$$
$$U_{1\to 2} \overline{<} U_{1\to\{1,2\}}, \tag{34c}$$
$$U_{1\to 2} \overline{<} U_{\{1,2\}\to 2}, \tag{34d}$$
$$U_{1\to\{1,2\}} \lessdot U_{\{1,2\}\to 2}, \tag{34e}$$

with distribution

$$P_{U_{1\to 2},U_{2\to 2},U_{1\to\{1,2\}},U_{\{1,2\}\to 2},U_{\{1,2\}\to\{1,2\}}} = \tag{35a}$$
$$P_{U_{\{1,2\}\to\{1,2\}}} \tag{35b}$$
$$P_{U_{\{1,2\}\to 2}|U_{\{1,2\}\to\{1,2\}}} \tag{35c}$$
$$P_{U_{2\to 2}|U_{\{1,2\}\to 2},U_{\{1,2\}\to\{1,2\}}} \tag{35d}$$
$$P_{U_{1\to\{1,2\}}|U_{\{1,2\}\to 2},U_{\{1,2\}\to\{1,2\}}} \tag{35e}$$
$$P_{U_{1\to 2}|U_{1\to\{1,2\}},U_{\{1,2\}\to 2},U_{\{1,2\}\to\{1,2\}}}. \tag{35f}$$

IV. CODEBOOK GENERATION, ENCODING PROCEDURE, INPUT GENERATION AND DECODING PROCEDURES FOR A CGRAS

We now outline the codebook generation, encoding, and decoding operations for a general transmission scheme associated with a CGRAS. The codewords are generated by drawing i.i.d. symbols according to the joint distribution associated with the ***S*** edges of $\mathcal{G}$. They are furthermore chosen so as to appear as if generated according to the distribution associated with edges ***S*** and ***B-***. Finally the channel inputs are produced as a function of the codewords known at each transmitter. At each receiver, the decoder looks for a set of codewords that possesses the correct conditional distribution given the received channel outputs. The conditions under which encoding and decoding errors vanish as the block-length goes to infinity are determined in the next sections.

A. Codebook Generation

The codebook of a CGRAS is generated according to the distribution imposed by the superposition coding edges where for each codeword in the base codebook a top codebook is generated.

Given a specific coding strategy, specified by a rate-splitting matrix Γ and a chain graph, each message $W'_{\mathbf{i}\to\mathbf{j}}$, the codebook can be generated by repeating the following step for each node in the CGRAS,

- Consider the node $U_{\mathbf{i}\to\mathbf{j}}$ and assume that the codebook of the parent nodes has been generated and indexed by $l_{\mathbf{l}\to\mathbf{m}} \in [1 \ldots 2^{L_{\mathbf{l}\to\mathbf{m}}}]$, that is

  $$U_{\mathbf{l}\to\mathbf{m}} = U_{\mathbf{l}\to\mathbf{m}}(l_{\mathbf{l}\to\mathbf{m}}),\ \forall\ (\mathbf{l},\mathbf{m})\ \ \text{s.t.}\ \ U_{\mathbf{i}\to\mathbf{j}} \overline{<} U_{\mathbf{l}\to\mathbf{m}},$$

  then, for each set

  $$\{\ l_{\mathbf{l}\to\mathbf{m}},\ \forall\ (\mathbf{l},\mathbf{m})\ \text{s.t.}\ \ U_{\mathbf{i}\to\mathbf{j}} \overline{<} U_{\mathbf{l}\to\mathbf{m}}\},$$

  repeat the following:

  1) generate $2^{NL_{\mathbf{i}\to\mathbf{j}}}$ codewords, for

     $$L_{\mathbf{i}\to\mathbf{j}} = R'_{\mathbf{i}\to\mathbf{j}} + \overline{R}_{\mathbf{i}\to\mathbf{j}}, \tag{36}$$

     with i.i.d. symbols drawn from the distribution $P_{U_{\mathbf{i}\to\mathbf{j}} | \{U_{\mathbf{l}\to\mathbf{m}},\ U_{\mathbf{l}\to\mathbf{m}} \overline{<} U_{\mathbf{i}\to\mathbf{j}}\}}$.
  2) Place each codeword $U^N_{\mathbf{i}\to\mathbf{j}}$ in $2^{NR'_{\mathbf{i}\to\mathbf{j}}}$ bins of size $2^{N\overline{R}'_{\mathbf{i}\to\mathbf{j}}}$ each.
  3) Index each codebook of size $2^{NL_{\mathbf{i}\to\mathbf{j}}}$ using the set $\{\ l_{\mathbf{l}\to\mathbf{m}},\ \forall\ (\mathbf{l},\mathbf{m})\ \text{s.t.}\ \ U_{\mathbf{i}\to\mathbf{j}} \overline{<} U_{\mathbf{l}\to\mathbf{m}}\}$ so that

     $$U^N_{\mathbf{i}\to\mathbf{j}} = U^N_{\mathbf{i}\to\mathbf{j}}\left(w'_{\mathbf{i}\to\mathbf{j}}, b_{\mathbf{i}\to\mathbf{j}}, \{\ l_{\mathbf{l}\to\mathbf{m}},\ \forall\ (\mathbf{l},\mathbf{m})\ \text{s.t.}\ \ U_{\mathbf{i}\to\mathbf{j}} \overline{<} U_{\mathbf{l}\to\mathbf{m}}\}\right). \tag{37}$$

Since the superposition coding graph $\mathcal{G}(V, \boldsymbol{S})$ is an ADG, we can apply the above step starting from the nodes that have no parents to all the nodes in the graph and all the way up to the leaves of graph.

The overall distribution of the codebook $\{U^N_{\mathbf{i}\to\mathbf{j}},\ \forall(\mathbf{i},\mathbf{j})\}$ is therefore

$$P_{\text{codebook}} = P_Q \prod_{(\mathbf{i},\mathbf{j})} P_{U_{\mathbf{i}\to\mathbf{j}} | \{U_{\mathbf{l}\to\mathbf{m}}:\ U_{\mathbf{l}\to\mathbf{m}} \overline{<} U_{\mathbf{l}\to\mathbf{m}}\}, Q}, \tag{38}$$

among the RV $U_{\mathbf{i}\to\mathbf{j}}$ in the CGRAS.

The codewords are generated in such fashion that if we consider codewords with the same set of indexes

$$\{\ l_{\mathbf{l}\to\mathbf{m}},\ \forall\ (\mathbf{l},\mathbf{m})\ \text{s.t.}\ \ U_{\mathbf{i}\to\mathbf{j}} \overline{<} U_{\mathbf{l}\to\mathbf{m}}\},$$

are generated according to the same conditional distribution with respect to the parent nodes.

The transmitted codeword $U^N_{\mathbf{i}\to\mathbf{j}}$ depends therefore on the encoded message $w_{\mathbf{i}\to\mathbf{j}}$ as well as on the previously encoded codewords $U_{\mathbf{l}\to\mathbf{m}}$ upon which the codeword is superposed. This dependency is expressed by the conditional distribution of $U^N_{\mathbf{i}\to\mathbf{j}}$ with respect to the parent codewords. This corresponds to the fact in superposition coding the codeword of the top message is chosen from a codebook that depends on the base codeword. When multiple superposition steps are performed, that is, multiple codewords are stacked one on top of the other, the top most codeword is generated according to a codebook that depends on all the codewords upon which it superposed. $L_{\mathbf{i}\to\mathbf{j}}$ is the rate of each of the codebooks generated for each parent codeword and is in the following referred to as *codebook rate*. The bin index $w_{\mathbf{i}\to\mathbf{j}}$ in determined by the message to be transmitted, we therefore refer to this index as the *message index*. The rate of the message index $\overline{R}_{\mathbf{i}\to\mathbf{j}}$ is referred to as *message rate*. The bin index $b_{\mathbf{i}\to\mathbf{j}}$ in determined by the binning procedure, we refer to this index as the *binning index*. The rate of the binning index $\overline{R}_{\mathbf{i}\to\mathbf{j}}$ is referred to as *binning rate*.

B. Encoding procedure

In the encoding procedure a specific codeword $U^N_{\mathbf{i}\to\mathbf{j}}\left(w'_{\mathbf{i}\to\mathbf{j}}, b_{\mathbf{i}\to\mathbf{j}}, \{\ l_{\mathbf{l}\to\mathbf{m}},\ \forall\ (\mathbf{l},\mathbf{m}) \text{ s.t. } \ U_{\mathbf{i}\to\mathbf{j}} \overline{<} U_{\mathbf{l}\to\mathbf{m}}\}\right)$ is chosen for transmission. The set $\{\ l_{\mathbf{l}\to\mathbf{m}},\ \forall\ (\mathbf{l},\mathbf{m}) \text{ s.t. } \ U_{\mathbf{i}\to\mathbf{j}} \overline{<} U_{\mathbf{l}\to\mathbf{m}}\}$ is determined by the parent codewords to be transmitted while the bin index $w_{\mathbf{i}\to\mathbf{j}}$ is chosen by the outcome of $W_{\mathbf{i}\to\mathbf{j}}$. The binning index $b_{\mathbf{i}\to\mathbf{j}}$ is finally chosen so that the codewords appear to have been generated with i.i.d. symbols drawn from the distribution

$$P_{\text{encoding}} = P_Q \prod_{(\mathbf{i},\mathbf{j})} P_{U_{\mathbf{i}\to\mathbf{j}}|\{U_{\mathbf{l}\to\mathbf{m}},\ U_{\mathbf{i}\to\mathbf{j}} \overline{<} U_{\mathbf{l}\to\mathbf{m}} \text{ or } U_{\mathbf{i}\to\mathbf{j}} \overset{\leftarrow}{\lessdot} U_{\mathbf{l}\to\mathbf{m}}\},Q}, \tag{39}$$

instead of the codebook distribution (38). If a codeword cannot be determined, then it picks a value of $b_{\mathbf{i}\to\mathbf{j}}$ at random. We may find a jointly typical codeword if the number of bins $b_{\mathbf{i}\to\mathbf{j}}$ is sufficiently large, that is, if $\overline{R}_{\mathbf{i}\to\mathbf{j}}$ is sufficiently large.

C. Input generation

Finally, node k's encoder produces the channel input X_k^N as a deterministic function of its codebook(s), i.e.

$$X_k^N = X_k^N\left(\{U^N_{\mathbf{i}\to\mathbf{j}},\ \forall\ (\mathbf{i},\mathbf{j}) \ \text{ s.t. } \ k \in \mathbf{i}\}\right). \tag{40}$$

Restricting the class of encoding functions to deterministic functions instead of random functions can be done without loss of generality. This can be proved using the approach in [40]. This result is stated formally in the following theorem.

Theorem IV.1. *Restricting the encoding function in* (40) *to be a deterministic function, instead of a random function, is done without loss of generality.*

Proof: The complete proof is provided in App. C. The main intuition in the proof is that if a random encoding function performs well then there must be a deterministic encoding function that performs better than a random encoding procedure. This argument is valid regardless of the specific encoder structure. ■

D. Decoding procedure

To decode the transmitted messages, each receiver z looks for a set of bin indices $w'_{\mathbf{i}\to\mathbf{j}}$ and $b_{\mathbf{i}\to\mathbf{j}}$ for $z \in \mathbf{j}$, such that the set $\left\{Y_z^N, \left\{U^N_{\mathbf{i}\to\mathbf{j}} :\ z\ \in\ \mathbf{j}\right\}\right\}$ looks as if generated i.i.d. according to the distribution

$$P_{Y_z,\{U_{\mathbf{i}\to\mathbf{j}}:\ z\in\mathbf{j}\}}, \tag{41}$$

An error is committed if any of the receivers decodes (at least) a bin index incorrectly. If the decoder cannot find such codeword or it finds more than one, it picks one tuple at random.

We can find a codeword with the desired joint typicality condition; this codeword is unique if the number of transmitted codewords is small (if the transmission rate $L_{\mathbf{i}\to\mathbf{j}}$ is sufficiently small).

Note that the decoders, although interested only in the decoding of the messages $W'_{\mathbf{i}\to\mathbf{j}}$, are decoding all the indexes $b_{\mathbf{i}\to\mathbf{j}}$ that index the codeword $U^N_{\mathbf{i}\to\mathbf{j}}$. The decoding of the binning index $b_{\mathbf{i}\to\mathbf{j}}$ reduces the probability of error as it requires the decoded messages to be distributed according to the joint imposed by the encoding procedure.

Given the clear correspondence between the codeword $U_{\mathbf{i}\to\mathbf{j}}$ in the CGRAS and the codeword $U^N_{\mathbf{i}\to\mathbf{j}}$ in the transmission strategy, in the following we often refer to one or the other quite freely.

Also, with a slight abuse of notation, we adopt the following shorthand notation to refer to a specific codeword in the codebook

$$U_{\mathbf{i}\to\mathbf{j}}(w'_{\mathbf{i}\to\mathbf{j}}, b_{\mathbf{i}\to\mathbf{j}}) = U_{\mathbf{i}\to\mathbf{j}}\left(w'_{\mathbf{i}\to\mathbf{j}}, b_{\mathbf{i}\to\mathbf{j}}, \{l_{\mathbf{v}\to\mathbf{t}},\ \forall\ U_{\mathbf{i}\to\mathbf{j}} \overline{<} U_{\mathbf{v}\to\mathbf{t}}\}\right), \tag{42}$$

We identify the codewords only with the message $w'_{\mathbf{i}\to\mathbf{j}}$ and the binning index $b_{\mathbf{i}\to\mathbf{j}}$ with the implicit understanding that the remaining bin indexes are determined by the parent codewords $U^N_{\mathbf{l}\to\mathbf{m}}$ upon which $U^N_{\mathbf{i}\to\mathbf{j}}$ is superposed.

V. DERIVATION OF THE RATE BOUNDS

In this section we derive the achievable rate region of the transmission strategy obtained from a CGRAS as described in Sec. IV. The proof relies on the properties of typical sequences, that is, sequences of i.i.d. draws with lengths approaching infinity. For such sequences the empirical distribution as $N \to \infty$ approaches the true generating one and many properties follow from this convergence. In particular it is possible to bound the probability of encountering sequences that appear to be generated according to a different distribution than the true generating distribution. Two such bounds are:

- **Covering lemma / Mutual covering lemma** [2], [41], [4] bounds the minimum number of i.i.d. sequences $U^N_{\mathbf{i}\to\mathbf{j}}$, $U^N_{\mathbf{l}\to\mathbf{m}}$ that one needs to generate in order to find two that appear as if generated according to a joint distribution $P^N_{U_{\mathbf{i}\to\mathbf{j}},U_{\mathbf{l}\to\mathbf{m}}}$.

Theorem V.1. Covering Lemma [4, page 70] *Consider the set of RVs* $(U, X, \widehat{X})$ *and the joint distribution* $P_{U,X,\widehat{X}}$*, together with the marginal distributions* $P_{U,X}$ *and conditional distribution* $P_{\widehat{X}|U}$*. Moreover let* (U^N, X^N) *be an i.i.d. sequence from the typical set* $\mathcal{T}_\epsilon^N(P_{U,X})$ *and take* 2^{NR} *i.i.d. sequences* $\widehat{X}^N$ *from the distribution* $P^N_{\widehat{X}|U}$ *indexed as* $\widehat{X}^N(m),\ m \in \{1 \ldots 2^{nR}\}$*. Then there exists* $\delta(\epsilon) \to 0$ *as* $\epsilon \to 0$ *such that*

$$P\left[\exists\ \widehat{m}\ \in \{1 \ldots 2^{nR}\},\ \ \text{s.t. } (U^N, X^N, \widehat{X}^N(\widehat{m})) \in \mathcal{T}_\epsilon^N(P_{U,X,\widehat{X}})\right] \to 1,$$

as $N \to \infty$ *if*

$$R \geq I(X; \widehat{X}|U) + \delta(\epsilon).$$

The mutual covering lemma extends the covering lemma by considering the case where both X and $\widehat{X}$ are random sequences.

Theorem V.2. Mutual Covering Lemma [4, page 221] *Consider the set of RVs* $(U, X, \widehat{X})$ *and the joint distribution* $P_{U,X,\widehat{X}}$*, together with the conditional distributions* $P_{X|U}$ *and* $P_{\widehat{X}|U}$*. Moreover let* U^N *be an i.i.d. sequence from the typical set* $\mathcal{T}_\epsilon^N(P_U)$*. Take* 2^{NR_1} *i.i.d. sequences* X^N *from the distribution* $P^N_{X|U}$ *indexed as* $X^N(m_1),\ m_1 \in \{1 \ldots 2^{nR_1}\}$ *and and take* 2^{NR_2} *i.i.d. sequences* $\widehat{X}^N$ *from the distribution* $P^N_{\widehat{X}|U}$ *indexed as* $\widehat{X}^N(m_2),\ m_2 \in \{1 \ldots 2^{nR_2}\}$*. Then there exists* $\delta(\epsilon) \to 0$ *as* $\epsilon \to 0$ *such that*

$$P\left[\exists\ (\widehat{m}_1, \widehat{m}_2)\ \in \{1 \ldots 2^{nR_1}\} \times \{1 \ldots 2^{nR_2}\},\ \ \text{s.t. } (U^N, X^N(\widehat{m}_1), \widehat{X}^N(\widehat{m}_2)) \in \mathcal{T}_\epsilon^N(P_{U,X,\widehat{X}})\right] \to 1,$$

as $N \to \infty$ *if*

$$R_1 + R_2 \geq I(X; \widehat{X}|U) + \delta(\epsilon).$$

Detailed proofs of both the covering lemma and the mutual covering lemma are provided in [3], [4].

- **Packing lemma** [2], [32], [4] bounds the maximum number of independent sequences $U^N_{\mathbf{i}\to\mathbf{j}}$, $U^N_{\mathbf{l}\to\mathbf{m}}$ that one can generate so that no two of them appear as if generated according to a joint distribution $P^N_{U_{\mathbf{i}\to\mathbf{j}}, U_{\mathbf{l}\to\mathbf{m}}}$.

  Theorem V.3. Packing Lemma [4, page 53] *Consider the set of RVs* (U, X, Y) *and the joint distribution* $P_{U,X,Y}$*, together with the marginal distributions* P_U *and* $P_{X|U}$*. Moreover let* Y_N *be an arbitrarily distributed sequence and* U^N *an i.i.d. sequence from the typical set* $\mathcal{T}_\epsilon^N(P_U)$*p. Take* 2^{NR} *i.i.d. sequences* X^N *from the distribution* $P^N_{X|U}$ *indexed as* $X^N(m),\ m \in \{1 \ldots 2^{nR}\}$*. Then there exists* $\delta(\epsilon) \to 0$ *as* $\epsilon \to 0$ *such that*

$$P\left[\exists\ \widehat{m}\ \in \{1 \ldots 2^{nR}\},\ \ \text{s.t. } (U^N, X^N(\widehat{m}), Y) \in \mathcal{T}_\epsilon^N(P_{U,X,Y})\right] \to 0,$$

  as $N \to \infty$ *if*

$$R \leq I(X; Y|U) - \delta(\epsilon).$$

  Detailed proofs of the packing lemma are provided in [3], [4].

Together with bounds on the probability of an error event, these lemmas can be used to determine bounds on the cardinality of the codebook and, therefore, the transmission rates.

Both bounds are based on standard properties of jointly typical sequences [42] and are common tools used to derive achievable rate regions for multi-terminal networks. Our contribution lies in the generalization of the error analysis corresponding to our general transmission scheme for a general transmission network.

Without loss of generality, the error analysis may be bounded as

$$\begin{aligned}&\mathbb{P}[\text{error}] \leq \\ &\quad \mathbb{P}[\text{encoding NOT successful}] \\ &\quad +\mathbb{P}[\text{decoding NOT successful}|\text{encoding IS successful}].\end{aligned}$$

In the following sections we provide bounds on the rates $L_{\mathbf{i}\to\mathbf{j}}$ and $\overline{R}_{\mathbf{i}\to\mathbf{j}}$ such that the probability of encoding error and the probability of decoding error given that encoding was successful, vanishes as $N \to \infty$. The bound on the binning rates $\overline{R}_{\mathbf{i}\to\mathbf{j}}$ are obtained using the covering lemma of Th. V.1 and the mutual covering lemma Th. V.2 and are of the form $\overline{R}_{\mathbf{i}\to\mathbf{j}} \geq \ldots$ as they bound the number of excess codewords that must be generated in order for the encoding procedure in Sec. IV-B to be successful.

The bounds on $L_{\mathbf{i}\to\mathbf{j}}$ are instead obtained using the packing lemma of Th. V.3 and are of the form $L_{\mathbf{i}\to\mathbf{j}} \leq \ldots$ as they bound the maximum number of codewords that can be generated in order for the decoding procedure in Sec. IV-D to be successful.

We bound both the encoding and the decoding error probability using two bounds on these probabilities. For the encoding probability we have

- **Error of events bound:** this is a simple bound on the error probability and the results on the binning rate are not always tight. On the other hand the analysis of the error is conceptually simple and the bound on the binning rates have intuitive expressions.

- **Markov's lemma**: this is a more refined bound with respect to the previous case, but the error analysis is more laborious and the expressions of the bounds more involved.

For the decoding error probability we have

- **Sequential decoding:** this is a simple bound that assumes that each codeword must be correctly decoded before the decoding proceeds to the connected codewords in the CGRAS. The rate bounds are intuitive but not always tight.
- **Joint decoding:** instead of decoding each codeword singularly, the codewords are here all simultaneously decoded. The resulting bounds are usually tighter than the previous case and the error analysis more involved.

These four bounding techniques have been widely used in literature to derive achievable regions for many classic channels such as the multi-access channel, the broadcast channel, the interference channel, and the cognitive interference channel. It is commonly believed that using Markov's lemma and joint decoding yields the tightest bounds, or alternatively, the largest achievable regions. Despite this common belief, it is not always clear when these two bounding techniques provide an improvement over simpler derivations. The way in which the bounding techniques compare is relevant not only from a purely theoretical standpoint, but is also relevant in the design of practical communication systems. The bounds using Markov's lemma and joint decoding suggests that encoding and decoding should be done in a simultaneous fashion while the bounds using the error of events bound and sequential decoding point toward a sequential implementation. With our analysis we are able to answer this longstanding question for a general achievable scheme by deriving the rate bounds obtained with each of these four approaches.

A. Encoding Errors

For the probability of encoding error to vanish as the block-length increases it is necessary to choose a large enough binning rate $\overline{R}_{\mathbf{i}\to\mathbf{j}}$ so that it is possible to jointly find a set of bin index $\overline{b}_{\mathbf{i}\to\mathbf{j}}$ for which the codeword $U_{\mathbf{i}\to\mathbf{j}}^N$ appears generated according to the conditional distribution in (39) although generated according to the conditional distribution in (38). This bound is obtained using the covering lemma which bounds the minimum number of typical sequences that must be generated in order to be able to find one that "fakes" or "deceives" a probability distribution. Intuitively an encoding error occurs whenever it is not possible to find a bin index $b_{\mathbf{i}\to\mathbf{j}}$ so this deceiving codeword can be found. The encoding error probability then depends on all of the possible combinations in which an encoding error may be committed, that is on all the possible ways of failing to find the appropriate bin index of any given codeword or, equivalently, jointly typical codewords. The probability of any specific encoding error event depends on two factors: the number of excess codewords generated and the joint distribution that we are trying to fake. The number of excess codewords in the bin corresponding to the index $b_{\mathbf{i}\to\mathbf{j}}$ is determined by the binning rate $\overline{R}_{\mathbf{i}\to\mathbf{j}}$ and choosing $\overline{R}_{\mathbf{i}\to\mathbf{j}}$ large enough grants that a deceiving codeword exists. The difference between the codebook distribution and the encoding distribution determines how hard it is to find the appropriate codeword; this distance is intuitively related to the KL divergence between the distribution imposed by the encoding and the actual distribution in the codebook.

This intuitive interpretation of the error probability corresponds to the derivation of bound on the binning rates obtained using the union of events bound. The bound obtained using Markov's lemma has a more complex structure and does not lend itself to a simple interpretation.

1) Some more notation: We introduce here some additional notation that we use to compactly describe results in the following section.

Since an encoding error is committed whenever it is not possible to find the desired bin index $b_{\mathbf{i}\to\mathbf{j}}$ for any of the codewords $U_{\mathbf{i}\to\mathbf{j}}^N$, the overall probability of error is obtained considering all the possible permutations in which an encoding error can be committed over the set of all codewords. It is actually necessary to consider only the codewords with a non-zero binning rate, thus it is convenient to define the set $\mathbf{S_B}$ as:

$$\mathbf{S_B} = \left\{ (\mathbf{i},\mathbf{j}), U_{\mathbf{i}\to\mathbf{j}} \lessdot U_{\mathbf{l}\to\mathbf{m}} \text{ for some } (\mathbf{l},\mathbf{m}) \right\}, \tag{43}$$

$\mathbf{S_B}$ is the set of all the indexes whose codeword possess a bin index. An error event is defined by any subset $\mathbf{S} \subset \mathbf{S_B}$ as the error event where the codewords $U_{\mathbf{i}\to\mathbf{j}}$ for $(\mathbf{i},\mathbf{j}) \in \mathbf{S}$ are incorrectly encoded while the codewords in the complement of the set $\overline{\mathbf{S}}$ in $\mathbf{S_B}$ are correctly encoded.

Intuitively we expect the condition for a successful encoding to depend on the distance between the codewords' distribution at generation and after encoding:

$$\mathbf{I}_{\text{codebook}}^{\text{encoding}} = E[\log P_{\text{encoding}}] - E[\log P_{\text{codebook}}] = \sum_{(\mathbf{i},\mathbf{j}) \in \mathbf{S_B}} I(U_{\mathbf{i}\to\mathbf{j}}; \{U_{\mathbf{l}\to\mathbf{m}},\ U_{\mathbf{i}\to\mathbf{j}} \overset{\leftarrow}{\overline{\lessdot}} U_{\mathbf{l}\to\mathbf{m}}\} | \{U_{\mathbf{l}\to\mathbf{m}},\ U_{\mathbf{i}\to\mathbf{j}} \overline{<} U_{\mathbf{l}\to\mathbf{m}}\} | Q). \tag{44}$$

In the following section the term $\mathbf{I}_{\text{codebook}}^{\text{encoding}}$ and related terms provide some insight on the nature of the conditions under which encoding is successful.

2) Encoding errors analysis using the union of events bound and the covering lemma: We begin by deriving the constraint on the binning rates using the union of events bound and the covering lemma of Th. V.1.

Theorem V.4. Encoding errors analysis using the union of events bound and the covering lemma: *For any CGRAS, the encoding procedure described in Sec. IV-B is successful with high probability as* $N \to \infty$ *if , for any subset* $\mathbf{S} \subset \mathbf{S_B}$ *such that*

$$(\mathbf{i},\mathbf{j}) \in \mathbf{S} \implies (\mathbf{l},\mathbf{m}) \in \mathbf{S},\ \forall\ (\mathbf{l},\mathbf{m}) \ \text{ s.t. } U_{\mathbf{l}\to\mathbf{m}} \overline{<} U_{\mathbf{i}\to\mathbf{j}}, \tag{45}$$

for $\mathbf{S_B}$ *in* (43), *the following holds:*

$$\sum_{(\mathbf{i},\mathbf{j})\ \in\ \mathbf{S}-\mathrm{root}_{\mathbf{B}}} \overline{R}_{\mathbf{i}\to\mathbf{j}} \geq \mathbf{I}_{\mathbf{S}}^{\mathrm{C.L.}}, \tag{46}$$

and where $\mathbf{I}_{\mathbf{S}}^{\mathrm{C.L.}}$ *is defined as*

$$\mathbf{I}_{\mathbf{S}}^{\mathrm{C.L.}} = \mathbb{E}_{\mathbf{S}-\mathrm{root}_{\mathbf{B}}}[\log P_{\mathrm{encoding}|\overline{\mathbf{S}}}] - \mathbb{E}_{\mathbf{S}-\mathrm{root}_{\mathbf{B}}}[\log P_{\mathrm{codebook}|\overline{\mathbf{S}}}] \tag{47a}$$

$$= \sum_{(\mathbf{i},\mathbf{j})\ \in\ \mathbf{S}-\mathrm{root}_{\mathbf{B}}} I(U_{\mathbf{i}\to\mathbf{j}}; \{U_{\mathbf{l}\to\mathbf{m}} \ \text{ s.t. } \ U_{\mathbf{i}\to\mathbf{j}} \overset{\leftarrow}{\lessdot} U_{\mathbf{l}\to\mathbf{m}},\ (\mathbf{l},\mathbf{m}) \in \mathbf{S}\} | \{U_{\mathbf{l}\to\mathbf{m}} \ \text{ s.t. } \ U_{\mathbf{i}\to\mathbf{j}} \overline{<} U_{\mathbf{l}\to\mathbf{m}}, U_{\mathbf{l}\to\mathbf{m}} \lessdot U_{\mathbf{i}\to\mathbf{j}}, (\mathbf{l},\mathbf{m}) \in \overline{\mathbf{S}}\}, Q), \tag{47b}$$

(C.L. *standing for "Covering Lemma") where* $\mathbb{E}_{\mathbf{S}-\mathrm{root}_{\mathbf{B}}}$ *indicates the expectation is taken over* $U_{\mathbf{i}\to\mathbf{j}}$ *in* $\mathbf{S} - \mathrm{root}_{\mathbf{B}}$ *that is defined as*

$$\mathbf{S} - \mathrm{root}_{\mathbf{B}} = \{U_{\mathbf{i}\to\mathbf{j}} \ \text{ s.t. } \ \nexists\ (\mathbf{l},\mathbf{m}) \in \mathbf{S},\ U_{\mathbf{i}\to\mathbf{j}} \overline{<} U_{\mathbf{l}\to\mathbf{m}}\}, \tag{48}$$

and where

$$P_{\mathrm{encoding}|\overline{\mathbf{S}}} = \frac{P_{\mathrm{encoding}}}{\prod_{(\mathbf{i},\mathbf{j})\in\overline{\mathbf{S}}} P_{U_{\mathbf{i}\to\mathbf{j}}|\{U_{\mathbf{l}\to\mathbf{m}},\ U_{\mathbf{i}\to\mathbf{j}} \overline{<} U_{\mathbf{l}\to\mathbf{m}} \text{ or } U_{\mathbf{i}\to\mathbf{j}} \overset{\leftarrow}{\lessdot} U_{\mathbf{l}\to\mathbf{m}}\}}}, \tag{49a}$$

$$P_{\mathrm{codebook}|\overline{\mathbf{S}}} = \frac{P_{\mathrm{codebook}}}{\prod_{(\mathbf{i},\mathbf{j})\in\overline{\mathbf{S}}} P_{U_{\mathbf{i}\to\mathbf{j}}|\{U_{\mathbf{l}\to\mathbf{m}},\ U_{\mathbf{i}\to\mathbf{j}} \overline{<} U_{\mathbf{l}\to\mathbf{m}}\}}}. \tag{49b}$$

Proof:

The complete proof can be found in App. D; we provide only the first steps of the proof and an intuitive interpretation of the remaining passages.

The probability of encoding error can be bounded using the union of events bound as the sum over all the possible subsets of $\mathbf{S_B}$ as defined in (43):

$$\mathbb{P}\left[\text{encoding NOT successful}\right] \leq \sum_{\mathbf{S}\subset\mathbf{S_B}} \mathbb{P}\left[E_{\mathbf{S}}\right], \tag{50}$$

where the event $E_{\mathbf{S}}$ is defined as

$$E_{\mathbf{S}} = \ U_{\mathbf{i}\to\mathbf{j}}^N \text{ NOT correctly encoded}, \quad (\mathbf{i},\mathbf{j}) \in \mathbf{S} \mid U_{\mathbf{i}\to\mathbf{j}}^N \text{ correctly encoded}, \quad (\mathbf{i},\mathbf{j}) \in \overline{\mathbf{S}}.$$

The bound in (50) can be tightened by noticing that certain error events need not be considered in the summation of (50). The codeword $U_{\mathbf{i}\to\mathbf{j}}^N$ is taken from a codebook determined by all the codewords $U_{\mathbf{l}\to\mathbf{m}}^N$ such that $U_{\mathbf{i}\to\mathbf{j}} \overline{<} U_{\mathbf{l}\to\mathbf{m}}$. If the encoding of any of the $U_{\mathbf{l}\to\mathbf{m}}^N$ fails, the codebook from which $U_{\mathbf{i}\to\mathbf{j}}^N$ is picked does not have the right conditional distribution given $U_{\mathbf{l}\to\mathbf{m}}^N$. For this reason it's impossible to find a codeword $U_{\mathbf{i}\to\mathbf{j}}^N$ that possesses the desired joint distribution. We can formally state this reasoning as follows: let $E_{\mathbf{S}'}$ be the error event in which $U_{\mathbf{i}\to\mathbf{j}}^N$ is correctly encoded, i.e. $(\mathbf{i},\mathbf{j}) \in \overline{\mathbf{S}}$, while $U_{\mathbf{l}\to\mathbf{m}}^N$ in incorrectly encoded for some $U_{\mathbf{i}\to\mathbf{j}} \overline{<} U_{\mathbf{l}\to\mathbf{m}}$, i.e. $(\mathbf{l},\mathbf{m}) \in \overline{\mathbf{S}}$. Given the encoding procedure of the CGRAS

$$P\left[E_{\mathbf{S}'}\right] \leq P\left[E_{\mathbf{S}'\cup(\mathbf{i},\mathbf{j})}\right], \tag{51}$$

the codebook for $U_{\mathbf{i}\to\mathbf{j}}^N$ depends on the codeword $U_{\mathbf{l}\to\mathbf{m}}^N$ as expressed in (37).

If the encoding succeeds with high probability, then

$$\lim_{N\to\infty} P\left[E_{\mathbf{S}'\cup(\mathbf{i},\mathbf{j})}\right] \to 0,$$

which implies that

$$\lim_{N\to\infty} P\left[E_{\mathbf{S}'}\right] \to 0,$$

as well.

Condition (45) specifies the set of $\mathbf{S}$ for which the error probability $P[E_{\mathbf{S}}]$ cannot be bounded as in (51) and we thus conclude that

$$\lim_{N\to\infty} \sum_{\mathbf{S}\subset\mathbf{S_B}} \mathbb{P}\left[E_{\mathbf{S}}\right] \to 0 \Longleftrightarrow \lim_{N\to\infty} \sum_{\mathbf{S}\subset\mathbf{S_B},\ (45)} \mathbb{P}\left[E_{\mathbf{S}}\right] \to 0. \tag{52}$$

In the following we will derive the condition under which the RHS of (52) occurs.

The same consideration that leads (52) is also key in bounding the probability $P[E_{\mathbf{S}}]$: since an error in encoding the base codeword induces an error in the top codewords, the probability of $P[E_{\mathbf{S}}]$ corresponds to the probability of committing an error in encoding the base codewords of the set $\mathbf{S}$, that is, the codewords in the set $\mathbf{S}-\mathrm{root}_{\mathbf{B}}$ in (48). When the codewords in the set $\mathbf{S}-\mathrm{root}_{\mathbf{B}}$ are all incorrectly encoded, all the codewords in the set $\mathbf{S}$ are also incorrectly decoded as superposed to incorrectly encoded codewords.

For each set $\mathbf{S}$ such that (45) holds, the bound on the binning rates depends on the difference in the distribution of the codewords in $\mathbf{S}$ at generation and the distribution after encoding, given all the correctly encoded codewords. This difference is intuitively measured by the mutual information term (47) which quantifies the distance between the distribution (49b) and (49a), which are the distribution of the incorrectly encoded codewords at generation and after the encoding operation respectively.

In App. D we prove that under the conditions in (45) the encoding of the codewords of $\mathbf{S}-\mathrm{root}_{\mathbf{B}}$ is successful with high probability as $N\to\infty$.

■

Remark V.5. The term $\mathbf{I}_{\mathbf{S}}^{\text{C.L.}}$ in (47) quantifies the distance between the distribution at generation and the distribution after encoding for the set $\mathbf{S}-\mathrm{root}_{\mathbf{B}}$. This term has a very similar expression to the term $\mathbf{I}_{\text{codebook}}^{\text{encoding}}$ in (44) when the summation is restricted to the terms in the set $\mathbf{S}-\mathrm{root}_{\mathbf{B}}$. An important difference is for the terms that have joint binning, in which case an extra term appears in the conditioning.

Mutual binning indeed makes the codeword $U_{\mathbf{i}\to\mathbf{j}}^{N}$ appear as if it was generated according to a distribution different from the codebook distribution, despite of failed encoding. Consider for instance the CGRAS where

$$U_{\{1,2\}\to 1} \lessdot U_{\{1,2\}\to 2}, \tag{53a}$$

$$U_{\{1,2\}\to 2} \lessdot U_{\{1,2\}\to 1}, \tag{53b}$$

and the set where the encoding of $U_{\{1,2\}\to 1}$ fails but the encoding of $U_{\{1,2\}\to 2}$ is successful, that is

$$(\{1,2\},1)\in\mathbf{S}, \tag{54a}$$

$$(\{1,2\},2)\in\overline{\mathbf{S}}. \tag{54b}$$

$$\tag{54c}$$

Assume also that condition (45) holds for $\mathbf{S}$. In this case the joint distribution between the codewords $U_{\{1,2\}\to 1}$ and $U_{\{1,2\}\to 2}$ after encoding is $P_{U_{\{1,2\}\to 1},U_{\{1,2\}\to 2}}$ even if the encoding of one codeword fails.

3) Bounds on the binning rates using the Th. V.4 for CIFC:

To illustrate the result in Th. V.4 we consider the CGRAS in (30g), also depicted in Fig. 6.

The scheme in (30g) has three codewords performing binning: $U_{1\to\{1,2\}}, U_{1\to 1}$ and $U_{1\to 2}$ and thus

$$\mathbf{S_B} = \left\{(1,\{1,2\}),(1,1),(1,2)\right\}.$$

All the possible subsets of $\mathbf{S_B}$ are provided in Tab. IV: in this table the column indexed by $b_{\mathbf{i}\to\mathbf{j}}$, $(\mathbf{i},\mathbf{j})\in\mathbf{S_B}$ indicates whether the corresponding bin index has been successfully encoded, using ✓, or not , using × or ⊠. The distribution of the codewords after the failed encoding procedure, i.e. $P_{\text{encoding}|\overline{\mathbf{S}}}$, is indicated in the last column, where P_{primary} is defined as

$$P_{\text{primary}} = P_{U_{\{1,2\}\to\{1,2\}},U_{1\to\{1,2\}},U_{\{1,2\}\to 2}}.$$

The distribution $P_{\text{codebook}|\overline{\mathbf{S}}}$ is obtained by first obtaining the conditional distribution of P_{codebook} in (38) given the correctly encoded codewords. The codewords in the set $\mathbf{S}-\mathrm{root}_{\mathbf{B}}$ defined by (48) are indicated with the symbol ⊠.

The rate bounds obtained applying Th. V.1 to this CGRAS are:

$$\overline{R}_{1\to\{1,2\}} \geq I\left(U_{1\to\{1,2\}};U_{\{1,2\}\to 2}|U_{\{1,2\}\to\{1,2\}},Q\right) \tag{55a}$$

$$\overline{R}_{1\to 1}+\overline{R}_{1\to 2} \geq I\left(U_{1\to 1};U_{1\to 2},U_{\{1,2\}\to 2}|U_{\{1,2\}\to 2},U_{1\to\{1,2\}},U_{\{1,2\}\to\{1,2\}},Q\right) \tag{55b}$$

$$\overline{R}_{1\to 2} \geq 0 \tag{55c}$$

$$\overline{R}_{1\to 1} \geq I\left(U_{1\to 1};U_{\{1,2\}\to 2}|U_{\{1,2\}\to 2},U_{1\to\{1,2\}},U_{\{1,2\}\to\{1,2\}},Q\right), \tag{55d}$$

TABLE IV
ENCODING ERROR EVENT TABLE USING TH. V.4 FOR CIFC IN (30g)

	$b_{1\to\{1,2\}}$	$b_{1\to 1}$	$b_{1\to 2}$	$P_{\text{encoding}\mid\overline{\mathbf{S}}}$
E1	×	✓	✓	(45) does not hold
E2	×	✓	×	(45) does not hold
E3	×	×	✓	(45) does not hold
E4	☒	×	×	$P_{\text{primary}} P_{U_{1\to\{1,2\}} \mid U_{\{1,2\}\to\{1,2\}}}$ $P_{U_{1\to 1} \mid U_{1\to\{1,2\}}, U_{\{1,2\}\to\{1,2\}}}$ $P_{U_{1\to 2} \mid U_{1\to\{1,2\}}, U_{\{1,2\}\to 2}, U_{\{1,2\}\to\{1,2\}}}$
E5	✓	☒	☒	$P_{\text{primary}} P_{U_{1\to\{1,2\}} \mid U_{\{1,2\}\to\{1,2\}}, U_{\{1,2\}\to 2}}$ $P_{U_{1\to 1} \mid U_{1\to\{1,2\}}, U_{\{1,2\}\to\{1,2\}}}$ $P_{U_{1\to 2} \mid U_{1\to\{1,2\}}, U_{\{1,2\}\to 2}, U_{\{1,2\}\to\{1,2\}}}$
E6	✓	✓	☒	P_{primary} $P_{U_{1\to 1}, U_{1\to 2} U_{1\to\{1,2\}} \mid U_{\{1,2\}\to\{1,2\}}, U_{\{1,2\}\to 2}}$
E7	✓	☒	✓	$P_{\text{primary}} P_{U_{1\to\{1,2\}} \mid U_{\{1,2\}\to\{1,2\}}, U_{\{1,2\}\to 2}}$ $P_{U_{1\to 1} \mid U_{1\to\{1,2\}}, U_{\{1,2\}\to\{1,2\}}}$ $P_{U_{1\to 2} \mid U_{1\to 1}, U_{1\to\{1,2\}}, U_{\{1,2\}\to 2}, U_{\{1,2\}\to\{1,2\}}}$
E8	✓	✓	✓	encoding is successful

B. Encoding errors analysis using Markov inequality and the mutual covering lemma

By employing Markov lemma, one can obtain a more refined error analysis than the one offered by the union of event bounds. The bound on the binning rates under which encoding is successful are generally better than the one obtained using Th. V.1 but these bounds are usually less intuitive. This analysis requires mutual covering lemma of Th. V.2.

Theorem V.6. Encoding errors analysis using Markov inequality and the mutual covering lemma: *For any CGRAS, the encoding procedure described in Sec. IV-B is successful with high probability as* $N \to \infty$ *if, for any subset* $\mathbf{S} \subset \mathbf{S}_{\mathbf{B}}$ *such that*

$$(\mathbf{i},\mathbf{j}) \in \mathbf{S} \implies (\mathbf{l},\mathbf{m}) \in \mathbf{S}, \ \forall \ (\mathbf{l},\mathbf{m}) \ \text{ s.t. } U_{\mathbf{l}\to\mathbf{m}} \overline{\lessdot} U_{\mathbf{i}\to\mathbf{j}}, \tag{56}$$

for $\mathbf{S}_{\mathbf{B}}$ *defined in* (43)*, the following holds:*

$$\sum_{(\mathbf{i},\mathbf{j}) \ \in \ \overline{\mathbf{S}}} \overline{R}_{\mathbf{i}\to\mathbf{j}} \geq \mathbf{I}_{\text{codebook}}^{\text{encoding}} - \mathbf{I}_{\mathbf{S}}^{\text{M.C.L.}}, \tag{57}$$

where

$$\begin{aligned} \mathbf{I}_{\mathbf{S}}^{\text{M.C.L.}} &= \mathbb{E}_{\mathbf{S}}[\log P_{\text{encoding}\mid\overline{\mathbf{S}}}] - \mathbb{E}_{\mathbf{S}}[\log P_{\text{codebook}\mid\overline{\mathbf{S}}}] && \text{(58a)} \\ &= \sum_{(\mathbf{i},\mathbf{j}) \ \in \ \mathbf{S}} I(U_{\mathbf{i}\to\mathbf{j}}; \{U_{\mathbf{l}\to\mathbf{m}}, \ U_{\mathbf{i}\to\mathbf{j}} \overleftarrow{\lessdot} U_{\mathbf{l}\to\mathbf{m}}, (\mathbf{l},\mathbf{m}) \in \mathbf{S}\} \mid \{U_{\mathbf{l}\to\mathbf{m}}, \ U_{\mathbf{i}\to\mathbf{j}} \overline{\lessdot} U_{\mathbf{l}\to\mathbf{m}}, \ U_{\mathbf{l}\to\mathbf{m}} \lessdot U_{\mathbf{i}\to\mathbf{j}}, (\mathbf{l},\mathbf{m}) \in \overline{\mathbf{S}}\}, Q), && \text{(58b)} \end{aligned}$$

*(*M.C.L. *standing for "Mutual Covering Lemma") where* $\mathbb{E}_{\mathbf{S}}$ *indicates the expectation is taken over* $U_{\mathbf{i}\to\mathbf{j}}$ *in* $\mathbf{S}$ *and where* $P_{\text{encoding}\mid\overline{\mathbf{S}}}$ *and* $P_{\text{codebook}\mid\overline{\mathbf{S}}}$ *are defined as in* (49) *and* $\mathbf{I}_{\text{codebook}}^{\text{encoding}}$ *as in* (44)*.*

Proof:

The complete proof can be found in App. E; we provide here the first steps of the proof and an intuitive interpretation of the remaining passages.

While in Th. V.4 we utilize the union of events bound to analyze the encoding error probability, here we use the Markov inequality. By using this bounding technique we are unable to readily link a bound on the binning rate $\overline{R}_{\mathbf{i}\to\mathbf{j}}$ with a specific error event in Th. V.4. Instead, the binning rate bounds relate to the calculation of variance and mean of the encoding error event.

We start the proof by applying the Markov inequality to the encoding error probability as follows:

$$\begin{aligned} \mathbb{P}[\text{encoding NOT successful}] &= \mathbb{P}\left[\nexists \ \mathbf{b}_{\mathbf{i}\to\mathbf{j}}, \ \text{s.t.} \ \ \left\{U_{\mathbf{i}\to\mathbf{j}}^N(w'_{\mathbf{i}\to\mathbf{j}}, b_{\mathbf{i}\to\mathbf{j}}), \ (\mathbf{i},\mathbf{j}) \in \mathbf{S}_{\mathbf{b}}, \ b_{\mathbf{i}\to\mathbf{j}} \in \mathbf{b}_{\mathbf{i}\to\mathbf{j}}\right\} \in \mathcal{T}_{\epsilon}^N\left(P^{\text{encoding}}\right)\right] && \text{(59a)} \\ &= \mathbb{P}\left[\left\{\bigcap_{\mathbf{b}_{\mathbf{i}\to\mathbf{j}}} \left\{U_{\mathbf{i}\to\mathbf{j}}^N(w'_{\mathbf{i}\to\mathbf{j}}, b_{\mathbf{i}\to\mathbf{j}}), \ (\mathbf{i},\mathbf{j}) \in \mathbf{S}_{\mathbf{b}}, \ b_{\mathbf{i}\to\mathbf{j}} \in \mathbf{b}_{\mathbf{i}\to\mathbf{j}}\right\} \in \mathcal{T}_{\epsilon}^N\left(P^{\text{encoding}}\right)\right\} = \emptyset\right] && \text{(59b)} \\ &= \mathbb{P}[\mathbf{K} = 0] \leq \frac{\mathbb{V}\text{ar}[\mathbf{K}]}{\mathbb{E}^2[\mathbf{K}]}, && \text{(59c)} \end{aligned}$$

TABLE V

ENCODING ERROR EVENTS TABLE USING TH. V.6 FOR CIFC IN (30g)

	$b_{1\to\{1,2\}}$	$b_{1\to 1}$	$b_{1\to 2}$	$\mathbf{I}_{\mathbf{S}}^{\text{M.C.L.}}$ for $\mathbf{S}$
E1	×	✓	✓	(56) does not hold
E2	×	✓	×	(56) does not hold
E3	×	×	✓	(56) does not hold
E4	×	×	×	$I(U_{1\to\{1,2\}}); U_{\{1,2\}\to 2\|U_{\{1,2\}\to\{1,2\}}}+$ $I(U_{1\to 1}; U_{1\to 2}, U_{\{1,2\}\to 2} \| U_{1\to\{1,2\}}, U_{\{1,2\}\to\{1,2\}})$
E5	✓	×	×	$I(U_{1\to 1}; U_{1\to 2}, U_{\{1,2\}\to 2} \| U_{1\to\{1,2\}}, U_{\{1,2\}\to\{1,2\}})$
E6	✓	×	✓	$I(U_{1\to 1}; U_{1\to 2}, U_{\{1,2\}\to 2} \| U_{1\to\{1,2\}}, U_{\{1,2\}\to 2}, U_{\{1,2\}\to\{1,2\}})$
E7	✓	✓	×	$I(U_{1\to 2}; U_{1\to 1} \| U_{1\to\{1,2\}}, U_{\{1,2\}\to 2}, U_{\{1,2\}\to\{1,2\}})$
E8	✓	✓	✓	0

where

$$\mathbf{b}_{\mathbf{i}\to\mathbf{j}} = \{b_{\mathbf{i}\to\mathbf{j}},\ (\mathbf{i},\mathbf{j}) \in \mathbf{S}_{\mathbf{B}}\} \qquad \forall\ b_{\mathbf{i}\to\mathbf{j}} \in \left[1 \ldots 2^{N\overline{R}_{\mathbf{i}\to\mathbf{j}}}\right], \tag{60a}$$

$$\mathbf{K} = \sum_{\mathbf{b}_{\mathbf{i}\to\mathbf{j}}} K_{\mathbf{b}_{\mathbf{i}\to\mathbf{j}}}, \tag{60b}$$

$$K_{\mathbf{b}_{\mathbf{i}\to\mathbf{j}}} = 1_{\{\mathcal{E}\}}, \tag{60c}$$

$$\mathcal{E} = \left\{U_{\mathbf{i},\mathbf{j}}^N(w_{\mathbf{i}\to\mathbf{j}}, b_{\mathbf{i}\to\mathbf{j}}),\ (\mathbf{i},\mathbf{j}) \in \mathbf{S}_{\mathbf{b}},\ b_{\mathbf{i}\to\mathbf{j}} \in \mathbf{b}_{\mathbf{i}\to\mathbf{j}}\right\} \in \mathcal{T}_{\epsilon}^{N}\left(P_{\text{encoding}}\right). \tag{60d}$$

The probability of encoding error is equivalent to the probability that no choice of bin indexes $\mathbf{b}_{\mathbf{i}\to\mathbf{j}}$ produces the desired typicality. We then associate the indicator function $\mathbf{K}_{\mathbf{i}\to\mathbf{j}}$ to the event that a sequence of bin indexes $\mathbf{b}_{\mathbf{i}\to\mathbf{j}}$ produces a successful encoding and the indicator function $\mathbf{K}$ to the event that encoding is successful. By applying the Markov lemma to the indicator function $\mathbf{K}$, we can obtain bounds on the binning rates by estimating the mean and variance of $\mathbf{K}$.

The mean $\mathbb{E}[\mathbf{K}]$ is

$$\mathbb{E}[\mathbf{K}] = 2^{N\left(\sum_{(\mathbf{i},\mathbf{j})\ \in\ \mathbf{S}_{\mathbf{B}}} \overline{R}_{\mathbf{i}\to\mathbf{j}} - \mathbf{I}_{\text{codebook}}^{\text{encoding}}\right)},$$

and can be interpreted to the fact that, on the first approximation, the encoding event is more likely as the number of excess codewords in the codebook increases, but less likely as the distance between the encoding and the decoding probability grows.

The variance $\mathbb{V}\text{ar}[\mathbf{K}]$ does not have a compact expression but it relates to the correlation between the events that the two sequences $\mathbf{b}_{\mathbf{i}\to\mathbf{j}}$ and $\widetilde{\mathbf{b}}_{\mathbf{i}\to\mathbf{j}}$ produce a successful encoding. This correlation depends on how the typicality condition $\mathcal{E}$ in (60d) varies among the two sequences.

In calculating $\mathbb{V}\text{ar}[\mathbf{K}]$ we encounter the same condition as (45) and we therefore link the notation of Th. V.4 and V.6 through this condition. Unfortunately it is not easy to relate the binning bounds obtained with these two theorems as straightforwardly as one may wish.

In App. E explicitly derive $\mathbb{E}[\mathbf{K}]$ and $\mathbb{V}\text{ar}[\mathbf{K}]$ and derive the conditions under which $\frac{\mathbb{V}\text{ar}[\mathbf{K}]}{\mathbb{E}^2[\mathbf{K}]}$ goes to zero as $N \to \infty$. ■

Condition (56) is equivalent to condition (45) and is restated here only for clarity.

Remark V.7. As in Rem. V.5 we point out to the reader the role of mutual binning in the conditioning of the term $\mathbf{I}_{\mathbf{S}}^{\text{M.C.L.}}$ in (58b). This term is derived in a similar fashion than $\mathbf{I}_{\mathbf{S}}^{\text{C.L.}}$ in (47) and the same reasoning in Rem. V.5 holds here as well.

1) Bounds on the binning rates using the Th. V.6 for CIFC:

As for Sec. V-A3, we illustrate the result in Th. V.6 by considering the CGRAS in (30g), also depicted in Fig. 6. The achievable scheme and some basic notations are introduced in Sec. V-B1.

$$\mathbf{I}_{\text{codeboox}}^{\text{encoding}} = I(U_{1\to\{1,2\}}; U_{\{1,2\}\to 2}|U_{\{1,2\}\to\{1,2\}}, Q) + I(U_{1\to 1}; U_{1\to 2}, U_{\{1,2\}\to 2}|U_{1\to\{1,2\}}, U_{\{1,2\}\to 2}, U_{\{1,2\}\to\{1,2\}}, Q), \tag{61}$$

while the terms $\mathbf{I}_{\mathbf{S}}^{\text{M.C.L.}}$ are derived in Tab. V. Tab. V is organized in a similar manner to Tab. IV: the column indexed by $b_{\mathbf{i}\to\mathbf{j}}$, $(\mathbf{i},\mathbf{j}) \in \mathbf{S}_{\mathbf{B}}$ indicates whether the corresponding index $(\mathbf{i},\mathbf{j})$ is in $\mathbf{S}$, using $\checkmark$, or in $\overline{\mathbf{S}}$, using $\times$. The term $\mathbf{I}_{\mathbf{S}}^{\text{M.C.L.}}$ for each possible $\mathbf{S}$ is indicated in the last column.

Using Tab. V we come to the following bounds on the binning rates:

$$\overline{R}_{1\to\{1,2\}} \geq I(U_{1\to\{1,2\}}; U_{\{1,2\}\to 2}|U_{\{1,2\}\to\{1,2\}}, Q) \tag{62a}$$

$$\overline{R}_{1\to\{1,2\}} + \overline{R}_{1\to 2} \geq I(U_{1\to\{1,2\}}); U_{\{1,2\}\to 2}|U_{\{1,2\}\to\{1,2\}}, Q) \tag{62b}$$

$$\begin{aligned}\overline{R}_{1\to\{1,2\}} + \overline{R}_{1\to 1} \geq\ & I(U_{1\to\{1,2\}}); U_{\{1,2\}\to 2}|U_{\{1,2\}\to\{1,2\}}, Q) \\ & + I(U_{1\to 1}; U_{1\to 2}|U_{\{1,2\}\to 2}, U_{1\to\{1,2\}}, U_{\{1,2\}\to\{1,2\}}, Q)\end{aligned} \tag{62c}$$

$$\begin{aligned}\overline{R}_{1\to\{1,2\}} + \overline{R}_{1\to 2} + \overline{R}_{1\to 1} \geq\ & I(U_{1\to\{1,2\}}; U_{\{1,2\}\to 2}|U_{\{1,2\}\to\{1,2\}}, Q) \\ & + I(U_{1\to 1}; U_{1\to 2}, U_{\{1,2\}\to 2}|U_{1\to\{1,2\}}, U_{\{1,2\}\to 2}, U_{\{1,2\}\to\{1,2\}}, Q).\end{aligned} \tag{62d}$$

Note that Tab. IV is very similar to Tab. V: given the similarity in the proof of the two theorems, the codebook bounds are derived in a very similar manner. In the following we will use only one table to represent both cases by simply adding the last column of one graph to the other.

C. Decoding Errors

For the decoding error probability to vanish as the block length increases, it is necessary to choose a small enough codebook rate $L_{\mathbf{i}\to\mathbf{j}}$ so that the codewords $U^N_{\mathbf{i}\to\mathbf{j}}$ are sufficiently "spaced apart" in the typical set to allow successful decoding. The bounds on the codebook rates are obtained using the packing lemma which bounds the maximum number of codewords that can be employed at transmission and still allow the decoder to recover the transmitted codeword. Decoding relies on the conditional typicality of the channel output given the transmitted codeword and on the typicality relationship imposed on the codewords by the encoding procedure. More specifically, a decoding error is committed when the decoder finds a set of wrong codewords $U^N_{\mathbf{i}\to\mathbf{j}}(\widehat{w}^z_{\mathbf{i}\to\mathbf{j}}, \widehat{b}^z_{\mathbf{i}\to\mathbf{j}})$ for $(\widehat{w}^z_{\mathbf{i}\to\mathbf{j}}, \widehat{b}^z_{\mathbf{i}\to\mathbf{j}}) \neq (w^z_{\mathbf{i}\to\mathbf{j}}, b^z_{\mathbf{i}\to\mathbf{j}})$, that is jointly typical with the channel output and jointly typical with the correctly decoded codewords according to the distribution at encoding. An decoding error happens when the random effects of the channel alter the channel output Y^N_z in such a way that $\left\{Y^N_z, \{U^N_{\mathbf{i}\to\mathbf{j}}, \ \forall \ (\mathbf{i},\mathbf{j}) \ \ \text{s.t.} \ \ z \in \mathbf{j}\}\right\}$ appears to be generated according to the distribution P_{encoding}, despite an error in selecting the bin or message indexes of some codewords. Since codewords are generated in an i.i.d. fashion, the incorrect codewords are independent from the channel output and thus the channel effectively introduces a dependency between independent sequences. In this perspective the channel acts a binning encoder that randomly introduces correlation among conditionally independent codewords $U^N_{\mathbf{i}\to\mathbf{j}}(\widehat{w}^z_{\mathbf{i}\to\mathbf{j}}, \widehat{b}^z_{\mathbf{i}\to\mathbf{j}})$ and Y^N_i. The incorrectly decoded codeword $U^N_{\mathbf{i}\to\mathbf{j}}(\widehat{w}_{\mathbf{i}\to\mathbf{j}}, \widehat{b}_{\mathbf{i}\to\mathbf{j}})$ does not possess typicality properties with the correctly decoded codewords as produced at the encoding, when the bin indexes $b_{\mathbf{i}\to\mathbf{j}}$ are picked. When an error is committed in decoding a bin index, then the resulting set of codewords loses the typicality property obtained through encoding. With these considerations we see that the probability of an encoding error intuitively relates to the KL divergence between the joint distribution of the channel output Y_z and the codewords as they appear after encoding and the distribution of the channel output times the distribution of the codewords they appear in the codebook. The analysis of the decoding errors is similar to the encoding counterpart in that we need to consider all the possible permutations in which a decoder can fail in determining the message index $w_{\mathbf{i}\to\mathbf{j}}$ and the bin index $b_{\mathbf{i}\to\mathbf{j}}$. In general the error permutation of decoding errors provide an intuitive interpretation of the bounds in terms of conditional mutual information.

1) Some more notation: We introduce here some additional notation that we use to compactly describe results in the following section.

The probability of error at each decoder is linked to the specific codewords that the receiver is attempting to decode; for this reason it is convenient to define the set $\mathbf{S}^z_{\mathbf{D}}$ as:

$$\mathbf{S}^z_{\mathbf{D}} = \left\{(\mathbf{i},\mathbf{j}) \ \ \text{s.t.} \ \ z \in \mathbf{j}\right\}, \tag{63}$$

that is, $\mathbf{S}^z_{\mathbf{D}}$ is the set of indexes whose codeword is decoded at receiver z. An error event at decoder z is defined by any subset $\mathbf{S} \subset \mathbf{S}^z_{\mathbf{D}}$ as the error event where the codewords $U_{\mathbf{i}\to\mathbf{j}}$ for $(\mathbf{i},\mathbf{j}) \in \mathbf{S}$ are incorrectly decoded while the codewords in the complement $\overline{\mathbf{S}}$ in $\mathbf{S}^z_{\mathbf{D}}$ are correctly decoded.

Intuitively we expect the condition for successful decoding to depend on the distance between the joint distribution of the codewords and the channel output at the encoding and the distribution after an incorrect decoding, that is:

$$\begin{aligned}\mathbf{I}^{\text{decoding}}_{\text{encoding}} &= E[\log P_{Y_z,\text{encoding}^z}] - E[\log P_{Y_z} P^z_{\text{codebook}}] \\ &= I(Y_z; \{U_{\mathbf{i}\to\mathbf{j}}, \ (\mathbf{i},\mathbf{j}) \in \mathbf{S}^z_{\mathbf{D}}\}|Q) + \sum_{(\mathbf{i},\mathbf{j})\in\mathbf{S}^z_{\mathbf{D}}} I(U_{\mathbf{i}\to\mathbf{j}}; \{U_{\mathbf{l}\to\mathbf{m}}, \ U_{\mathbf{i}\to\mathbf{j}} \overleftarrow{\lessdot} U_{\mathbf{l}\to\mathbf{m}}\}|\{U_{\mathbf{l}\to\mathbf{m}}, \ U_{\mathbf{i}\to\mathbf{j}} \overline{<} U_{\mathbf{l}\to\mathbf{m}}\}, Q),\end{aligned} \tag{64}$$

where

$$P_{Y_z,\text{encoding}^z} = P_{Y_z|\{U_{\mathbf{i}\to\mathbf{j}}\in\mathbf{S}^z_{\mathbf{D}}\},Q} P^z_{\text{encoding}} \tag{65a}$$

$$P^z_{\text{encoding}} = \sum_{(\mathbf{i},\mathbf{j})\notin\mathbf{S}^z_{\mathbf{D}}} P_{\text{encoding}} \tag{65b}$$

$$P^z_{\text{codebook}} = \sum_{(\mathbf{i},\mathbf{j})\notin\mathbf{S}^z_{\mathbf{D}}} P_{\text{codebook}}, \tag{65c}$$

that is, P^z_{encoding} and P^z_{codebook} are the encoding and the codebook generation distribution, as provided in (39) and (38) respectively, for the set of codewords decoded at decoder z, that is for the set $\{U_{\mathbf{i}\to\mathbf{j}}, \ (\mathbf{i},\mathbf{j}) \in \mathbf{S}^z_{\mathbf{D}}\}$.

2) Decoding error analysis using sequential decoding and the packing lemma: We begin by deriving the codebook rate bounds for the sequential decoding case. This is a simple way of analyzing where one uses the fact that a codeword can be correctly decoded only if all the codewords on which it depends have also been correctly encoded. The packing lemma of Th. V.3 provides the theoretical tool to bound the error probability.

Theorem V.8. Decoding error analysis using sequential decoding and the packing lemma: *For any CGRAS, the decoding procedure described in Sec. IV-D is successful with high probability as* $N \to \infty$ *if, for any receiver* z *and for any subset* $\mathbf{S} \subset \mathbf{S}^z_{\mathbf{D}}$ *such that*

$$(\mathbf{i},\mathbf{j}) \in \mathbf{S} \implies (\mathbf{l},\mathbf{m}) \in \mathbf{S}, \ \forall \ (\mathbf{l},\mathbf{m}) \ \text{ s.t. } U_{\mathbf{l}\to\mathbf{m}} \overline{<} U_{\mathbf{i}\to\mathbf{j}}, \tag{66}$$

for $\mathbf{S}^z_{\mathbf{D}}$ *defined in* (63)*, the following holds:*

$$\sum_{(\mathbf{i},\mathbf{j}) \in \mathbf{S}^z - \mathrm{root}_{\mathbf{D}}} L_{\mathbf{i}\to\mathbf{j}} \le \mathbf{I}^{\mathrm{S.D}}_{\mathbf{S}}, \tag{67}$$

where

$$\begin{aligned} \mathbf{I}^{z,\ \mathrm{S.D}}_{\mathbf{S}} &= \mathbb{E}_{Y_z \mathbf{S}^z - \mathrm{root}_{\mathbf{D}}}[\log P_{Y_z,\ \mathrm{encoding}|\overline{\mathbf{S}}}] - \mathbb{E}_{Y_z \mathbf{S}^z - \mathrm{root}_{\mathbf{D}}}[\log P_{Y_z\ \ \mathrm{decoding}|\overline{\mathbf{S}}}] \\ &= I(Y_z; \{U_{\mathbf{i}\to\mathbf{j}}, (\mathbf{i},\mathbf{j}) \in \mathbf{S}^z - \mathrm{root}_{\mathbf{D}}\} | \{U_{\mathbf{l}\to\mathbf{m}},\ (\mathbf{l},\mathbf{m}) \in \overline{\mathbf{S}}\}, Q) \\ &\quad + \sum_{(\mathbf{i},\mathbf{j}) \ \in \ \mathbf{S}^z - \mathrm{root}_{\mathbf{D}}} I(U_{\mathbf{i}\to\mathbf{j}}; \{U_{\mathbf{l}\to\mathbf{m}},\ U_{\mathbf{i}\to\mathbf{j}} \overset{\leftarrow}{\lessdot} U_{\mathbf{l}\to\mathbf{m}},\ (\mathbf{l},\mathbf{m}) \in \mathbf{S}^z - \mathrm{root}_{\mathbf{D}}\} | \{U_{\mathbf{l}\to\mathbf{m}},\ U_{\mathbf{i}\to\mathbf{j}} \overline{<} U_{\mathbf{l}\to\mathbf{m}} \ \in \ \overline{\mathbf{S}}\}, Q), \end{aligned} \tag{68}$$

(where S.D *stands for* sequential decoding*) and where* $\mathbb{E}^z_{Y_z \mathbf{S} - \mathrm{root}_{\mathbf{D}}}$ *indicates the expectation is taken over the channel output* Y_z *and* $U_{\mathbf{i}\to\mathbf{j}} \in \mathbf{S} - \mathrm{root}_{\mathbf{B}}$ *that is defined as*

$$\mathbf{S}^z - \mathrm{root}_{\mathbf{D}} = \{U_{\mathbf{i}\to\mathbf{j}} \text{ s.t. } \nexists \ (\mathbf{l},\mathbf{m}) \in \mathbf{S},\ U_{\mathbf{i}\to\mathbf{j}} \overline{<} U_{\mathbf{l}\to\mathbf{m}},\ U_{\mathbf{l}\to\mathbf{m}} \lessdot U_{\mathbf{i}\to\mathbf{j}}\}. \tag{69}$$

and where

$$P_{Y_z,\ \mathrm{encoding}|\overline{\mathbf{S}}} = P_{Y_z|\{U_{\mathbf{i}\to\mathbf{j}} \in \mathbf{S}^z_{\mathbf{D}}\}} \cdot \frac{P^z_{\mathrm{encoding}}}{\prod_{(\mathbf{i},\mathbf{j}) \in \overline{\mathbf{S}}} P_{U_{\mathbf{i}\to\mathbf{j}}|\{U_{\mathbf{l}\to\mathbf{m}},\ U_{\mathbf{i}\to\mathbf{j}} \overline{<} U_{\mathbf{l}\to\mathbf{m}} \text{ or } U_{\mathbf{i}\to\mathbf{j}} \overset{\leftarrow}{\lessdot} U_{\mathbf{l}\to\mathbf{m}}\}}} \tag{70a}$$

$$P_{Y_z,\ \mathrm{dencoding}|\overline{\mathbf{S}}} = P_{Y_z|\{U_{\mathbf{i}\to\mathbf{j}} \in \overline{\mathbf{S}}\}} \cdot \frac{P^z_{\mathrm{codebook}}}{\prod_{(\mathbf{i},\mathbf{j}) \in \overline{\mathbf{S}}} P_{U_{\mathbf{i}\to\mathbf{j}}|\{U_{\mathbf{l}\to\mathbf{m}},\ U_{\mathbf{i}\to\mathbf{j}} \overline{<} U_{\mathbf{l}\to\mathbf{m}}\}}}. \tag{70b}$$

Proof:

The complete proof can be found in App. F; we provide here the first steps of the proof and an intuitive interpretation of the remaining passages.

Without loss of generality assume that the message set $\{w'_{\mathbf{i}\to\mathbf{j}} = 1,\ \forall\ (\mathbf{i},\mathbf{j})\}$ is to be transmitted and that the encoding procedure and that the set of bin indexes $\{\overline{b}_{\mathbf{i}\to\mathbf{j}} = 1,\ \forall\ (\mathbf{i},\mathbf{j}) \in \mathbf{S}^z_{\mathbf{D}}\}$ is chosen at the encoder. It is sufficient to prove Th. V.8 for a single decoder z, since the decoding operation is analogous for all the decoders. A decoding error is committed at decoder z whenever either the message or the bin index of any given codewords fails, that is, whenever

$$(\widehat{w}^z_{\mathbf{i}\to\mathbf{j}}, \widehat{b}^z_{\mathbf{i}\to\mathbf{j}}) = (\widetilde{w}_{\mathbf{i}\to\mathbf{j}}, \widetilde{b}_{\mathbf{i}\to\mathbf{j}}) \neq (1, \overline{b}_{\mathbf{i}\to\mathbf{j}}).$$

Note that, in general, a decoder is not interested in decoding the binning index $b_{\mathbf{i}\to\mathbf{j}}$ but only on the message index $w'_{\mathbf{i}\to\mathbf{j}}$. Despite this, the correct decoding of the binning indexes is necessary in two situations:

- when another codeword depends on $\overline{b}_{\mathbf{i}\to\mathbf{j}}$ thorough superposition coding: when the codeword $U^N_{\mathbf{l}\to\mathbf{m}}$ is superposed to $U^N_{\mathbf{i}\to\mathbf{j}}$, then its codebook depends on the bin index $\overline{b}_{\mathbf{i}\to\mathbf{j}}$,
- when another codeword depends on $\overline{b}_{\mathbf{i}\to\mathbf{j}}$ thorough binning: when the codeword $U^N_{\mathbf{l}\to\mathbf{m}}$ is binned gainst $U^N_{\mathbf{i}\to\mathbf{j}}$, then the choice of the bin index $b_{\mathbf{l}\to\mathbf{m}}$ depends on the bin index $\overline{b}_{\mathbf{i}\to\mathbf{j}}$ as well.

For the cases where it is not necessary to correctly decode the binning index $b_{\mathbf{i}\to\mathbf{j}}$, one can sometimes show that not decoding $b_{\mathbf{i}\to\mathbf{j}}$ does not enlarge the achievable region [23]. Codewords indexed with different $b_{\mathbf{i}\to\mathbf{j}}$ representing the same message $w'_{\mathbf{i}\to\mathbf{j}}$ have no particular relationship among each other, therefore one can intuitively expect that decoding the correct $w'_{\mathbf{i}\to\mathbf{j}}$ can be done only by identifying the specific transmitted codeword $U_{\mathbf{i}\to\mathbf{j}}(w'_{\mathbf{i}\to\mathbf{j}}, b_{\mathbf{i}\to\mathbf{j}})$. Therefore correctly identify the binning index $b_{\mathbf{i}\to\mathbf{j}}$ does not impose additional constraint on the codebook rate.

An error is committed when there exists a set $\left\{(\widetilde{w}_{\mathbf{i}\to\mathbf{j}},\ \widetilde{b}_{\mathbf{i}\to\mathbf{j}}),\ (\mathbf{i},\mathbf{j}) \in \mathbf{S},\ (\widetilde{w}_{\mathbf{i}\to\mathbf{j}},\ \widetilde{b}_{\mathbf{i}\to\mathbf{j}}) \neq (1, \overline{b}_{\mathbf{i}\to\mathbf{j}})\right\}$ such that

$$\left(Y_z, \left\{U_{\mathbf{i}\to\mathbf{j}}(\widetilde{w}_{\mathbf{i}\to\mathbf{j}}, \widetilde{b}_{\mathbf{i}\to\mathbf{j}}),\ (\mathbf{i},\mathbf{j}) \in \mathbf{S}\right\}, \left\{U_{\mathbf{i}\to\mathbf{j}}(1, \overline{b}_{\mathbf{i}\to\mathbf{j}}),\ (\mathbf{i},\mathbf{j}) \in \overline{\mathbf{S}}\right\}\right) \in \mathcal{T}^N_{\epsilon}\left(Y_z, \{U_{\mathbf{i}\to\mathbf{j}},\ (\mathbf{i},\mathbf{j}) \in \mathbf{S}^z_{\mathbf{D}}\}\right), \tag{71}$$

Similarly to the proof of Th. V.4, the probability of a decoding error can be bounded using the union of events bound as the sum over all the possible subsets of $\mathbf{S_D}$ as defined in (63):

$$\mathbb{P}\left[\text{decoding NOT successful at Dec. } z | \text{encoding NOT successful}\right] \leq \sum_{\mathbf{S} \subset \mathbf{S}_\mathbf{D}^z} \mathbb{P}\left[D_\mathbf{S}\right], \tag{72}$$

where the event $E_\mathbf{S}$ is defined as

$$D_\mathbf{S} = \ U_{\mathbf{i}\to\mathbf{j}}^N \text{ NOT correctly decoded, } (\mathbf{i},\mathbf{j}) \in \mathbf{S} \mid U_{\mathbf{i}\to\mathbf{j}}^N \text{ correctly decoded, } (\mathbf{i},\mathbf{j}) \in \overline{\mathbf{S}},\ U_{\mathbf{i}\to\mathbf{j}}^N \text{ correctly encoded, } (\mathbf{i},\mathbf{j}) \in \mathbf{S}_\mathbf{D}^z.$$

The bound in (72) can be tightened by noticing that certain error events need not be considered in the summation of (72).

The decoder looks for the codeword $U_{\mathbf{i}\to\mathbf{j}}^N$ in a codebook that is determined by all the codewords $U_{\mathbf{l}\to\mathbf{m}}^N$ such that $U_{\mathbf{i}\to\mathbf{j}} \overline{<} U_{\mathbf{l}\to\mathbf{m}}$. If the decoding of any of the $U_{\mathbf{l}\to\mathbf{m}}^N$ fails, the codebook in which the decoder looks for $U_{\mathbf{i}\to\mathbf{j}}^N$ does not contain the actual transmitted codeword. For this reason it's impossible to correctly decode $U_{\mathbf{i}\to\mathbf{j}}^N$ with high probability. Similarly, the decoder looks for a codeword $U_{\mathbf{i}\to\mathbf{j}}^N$ that has the joint typicality properties imposed by the encoding procedure. The choice of the binning index $\overline{b}_{\mathbf{i}\to\mathbf{j}}$ is determined by all the codewords $U_{\mathbf{l}\to\mathbf{m}}^N$ such that $U_{\mathbf{i}\to\mathbf{j}} \lessdot U_{\mathbf{l}\to\mathbf{m}}$. If the encoding of any of the $U_{\mathbf{l}\to\mathbf{m}}^N$ fails, the transmitted codeword does not have the right conditional distribution, given $U_{\mathbf{l}\to\mathbf{m}}^N$. For this reason it's impossible to correctly decode the codeword $U_{\mathbf{i}\to\mathbf{j}}^N$.

We can formally state the above reasoning as follows: let $D_{\mathbf{S}'}$ be the error event in which $U_{\mathbf{i}\to\mathbf{j}}^N$ is correctly decoded, i.e. $(\mathbf{i},\mathbf{j}) \in \overline{\mathbf{S}}$, while $U_{\mathbf{l}\to\mathbf{m}}^N$ is incorrectly decoded for some $U_{\mathbf{i}\to\mathbf{j}} \overline{<} U_{\mathbf{l}\to\mathbf{m}}$, i.e. $(\mathbf{l},\mathbf{m}) \in \overline{\mathbf{S}}$. Given the encoding and decoding procedure of the CGRAS

$$P\left[D_{\mathbf{S}'}\right] \leq P\left[D_{\mathbf{S}' \cup (\mathbf{i},\mathbf{j})}\right], \tag{73}$$

since the codebook for $U_{\mathbf{i}\to\mathbf{j}}^N$ depends on the codeword $U_{\mathbf{l}\to\mathbf{m}}^N$ as expressed in (37).

If the decoding succeeds with high probability, then

$$\lim_{N\to\infty} P\left[D_{\mathbf{S}' \cup (\mathbf{i},\mathbf{j})}\right] \to 0,$$

which implies that

$$\lim_{N\to\infty} P\left[D_{\mathbf{S}'}\right] \to 0,$$

as well.

Condition (66) specifies the set of $\mathbf{S}$ for which the error probability $P[E_\mathbf{S}]$ cannot be bounded as in (73) and we thus conclude that

$$\lim_{N\to\infty} \sum_{\mathbf{S} \subset \mathbf{S}_{\mathbf{D}^z}} \mathbb{P}\left[D_\mathbf{S}\right] \to 0 \Longleftrightarrow \lim_{N\to\infty} \sum_{\mathbf{S} \subset \mathbf{S}_{\mathbf{D}^z},\ (66)} \mathbb{P}\left[D_\mathbf{S}\right] \to 0. \tag{74}$$

In the following we will derive the condition under which the RHS of (74) occurs.

As for Th. V.4, the same consideration that leads (66) is also key in bounding the probability $P[D_\mathbf{S}]$.

A sufficient condition for the event $D_\mathbf{S}$ to occur is to have an error in decoding the base codewords of the set $\mathbf{S}$, that is, the codewords in the set $\mathbf{S} - \mathrm{root}_\mathbf{D}$ in (69): since an error in decoding the base codeword induces an error in decoding all the related codewords, the probability of $P[D_\mathbf{S}]$ is upper bounded by the probability of committing an error in decoding the base codewords of the set $\mathbf{S}$, that is, the codewords in the set $\mathbf{S} - \mathrm{root}_\mathbf{D}$ in (63). When the codewords in the set $\mathbf{S} - \mathrm{root}_\mathbf{D}$ are all incorrectly encoded, all the codewords in the set $\mathbf{S}$ are also incorrectly decoded as superposed to or binned against incorrectly decoded codewords.

For each set $\mathbf{S}$ such that (66) holds, the bound on the codebook rates depends on the difference in the distribution of the channel output and the codewords in $\mathbf{S}$ at encoding and the distribution after incorrect decoding, given all the correctly encoded codewords.

This difference is intuitively measured by the mutual information term (V.8) which quantifies the distance between the distributions (70a) and (70b), which are the distributions of the channel output and the codewords in $\mathbf{S}$ when correctly decoded and when incorrectly decoded, respectively. In App. F we prove that under the conditions in (66) the decoding of the codewords of $\mathbf{S} - \mathrm{root}_\mathbf{D}$ is successful with high probability as $N \to \infty$.

■

Remark V.9. In the term $\mathbf{I}_\mathbf{S}^{z,\ \mathrm{S.D}}$ the mutual binning term does not appear in the conditioning as for Th. V.4 and V.6. When a bin index $(\mathbf{l},\mathbf{m}) \in \overline{\mathbf{S}}$ is correctly decoded, this does not change the distribution according to which the decoded codewords appear to possess. Let $U_{\mathbf{i}\to\mathbf{j}}^N$, $(\mathbf{i},\mathbf{j}) \in \mathbf{S}$ such that $U_{\mathbf{l}\to\mathbf{m}} \lessdot U_{\mathbf{i}\to\mathbf{j}}$, then $(U_{\mathbf{i}\to\mathbf{j}}^N, U_{\mathbf{l}\to\mathbf{m}}^N)$ appear to be generated according to the distribution at encoding only when they are both correctly decoded, i.e. when they are both in $\overline{\mathbf{S}}$.

Remark V.10. Note that, given $\mathbf{S}$, $\mathbf{S}^z - \mathrm{root}_\mathbf{D}$ is not uniquely defined. For instance consider the case

$$U_{1\to\{1,2\}} \overline{<} U_{1\to 1}, \tag{75a}$$

$$U_{1\to 1} \lessdot U_{1\to\{1,2\}}, \tag{75b}$$

TABLE VI

DECODING ERROR EVENT TABLE USING TH. V.8 FOR CIFC IN (30g) FOR DECODER 1 IN SEC. V-C3

	$U_{\{1,2\}\to\{1,2\}}$	$U_{1\to\{1,2\}}$	$U_{1\to 1}$	$P_{Y_z,\text{ dencoding}\vert\overline{\mathbf{S}}}$
D1	☒	…	…	P_{Y_1}
D2	✓	☒	…	$P_{Y_1\vert U_{\{1,2\}\to\{1,2\}}}$
D3	✓	✓	☒	$P_{Y_1\vert U_{1\to\{1,2\}},U_{\{1,2\}\to\{1,2\}}}$

TABLE VII

DECODING ERROR EVENT TABLE USING TH. V.8 FOR CIFC IN (30g) FOR DECODER 2 IN SEC. V-C3

	$U_{\{1,2\}\to\{1,2\}}$	$U_{\{1,2\}\to 2}$	$U_{1\to\{1,2\}}$	$U_{1\to 2}$	$U_{2\to 2}$	$P_{Y_z,\text{ dencoding}\vert\overline{\mathbf{S}}}$
D1	☒	…	…	…	…	P_{Y_1}
D2	✓	☒	…	…	…	$P_{Y_1\vert U_{\{1,2\}\to\{1,2\}}}$
D3	✓	✓	☒	…	☒	$P_{Y_1\vert U_{\{1,2\}\to\{1,2\}},U_{\{1,2\}\to 2}}$
D4	✓	✓	☒	…	✓	$P_{Y_1\vert U_{\{1,2\}\to\{1,2\}},U_{\{1,2\}\to 2},U_{2\to 2}}$
D5	✓	✓	✓	☒	☒	$P_{Y_1\vert U_{\{1,2\}\to\{1,2\}},U_{\{1,2\}\to 2},U_{1\to\{1,2\}}}$
D6	✓	✓	✓	✓	☒	$P_{Y_1\vert U_{\{1,2\}\to\{1,2\}},U_{\{1,2\}\to 2},U_{1\to\{1,2\}},U_{1\to 2}}$
D7	✓	✓	✓	☒	✓	$P_{Y_1\vert U_{\{1,2\}\to\{1,2\}},U_{\{1,2\}\to 2},U_{1\to\{1,2\}},U_{2\to 2}}$
D8	✓	✓	✓	✓	✓	successful decoding

then, for $\mathbf{S} = \{(1,1),(1,\{1,2\})\}$, we can define $\mathbf{S}^z - \mathrm{root}_{\mathbf{D}} = \{(1,1)\}$, as well as $\mathbf{S}^z - \mathrm{root}_{\mathbf{D}} = \{(1,\{1,2\})\}$.

3) Bounds on the codebook rates using the Th. V.8 for CIFC:

As for Sec. V-A3, we illustrate the result in Th. V.6 by considering the CGRAS in (30g), also depicted in Fig. 6. The achievable scheme and some basic notations are introduced in Sec. V-B1.

The set to address all the possible permutations of decoding errors $\mathbf{S}^1_{\mathbf{D}}$ and $\mathbf{S}^2_{\mathbf{D}}$ are defined as

$$\mathbf{S}^1_{\mathbf{D}} = \{(\{1,2\},\{1,2\}),(1,\{1,2\}),(1,1)\} \tag{76a}$$

$$\mathbf{S}^2_{\mathbf{D}} = \{(\{1,2\},\{1,2\}),(\{1,2\},2),(1,2),(2,2)\}\,. \tag{76b}$$

The term $\mathbf{I}^{\text{decoding}}_{\text{encoding}}$ for this CGRAS at decoder 1 is

$$\mathbf{I}^{\text{decoding }1}_{\text{encoding}} = I(Y_1; U_{\{1,2\}\to\{1,2\}}, U_{1\to\{1,2\}}, U_{1\to 1}|Q), \tag{77}$$

while at decoder 2 it is

$$\mathbf{I}^{\text{decoding }2}_{\text{encoding}} = I(Y_2; U_{\{1,2\}\to\{1,2\}}, U_{\{1,2\}\to 2}, U_{1\to 2}, U_{2\to 2}|Q) + I(U_{1\to\{1,2\}}; U_{2\to\{1,2\}}|U_{\{1,2\}\to\{1,2\}}, Q), \tag{78}$$

while the terms $\mathbf{I}^{z,\text{ S.D}}_{\mathbf{S}}$ can be derived using Tab. VI and Tab. VII. In these tables the column indexed by $b_{i\to j},\ (\mathbf{i},\mathbf{j}) \in \mathbf{S}_{\mathbf{D}}$ indicates whether the corresponding bin index has been successfully decoded, using ✓, or not , using × or ☒. The elements in $\mathbf{S}^z - \mathrm{root}_{\mathbf{D}}$ are indicated with ☒ while the element is $\mathbf{S}$ but not in $\mathbf{S}^z - \mathrm{root}_{\mathbf{D}}$ with ×. The symbol "…" on the column of $U_{\mathbf{i}\to\mathbf{j}}$ indicates that among all the possible values $\mathbf{S}$ containing the other elements in the row, only when $(\mathbf{i},\mathbf{j}) \in \mathbf{S}$ condition (66) holds. In other words this symbol indicates that the codewords on a given row not marked with … determine an error in decoding the elements marked with "…". The distribution of the channel output for the specific decoding error pattern is indicated in the last column.

Using Tab. VI we come to the following bounds on the codebook rates at decoder 1:

$$L_{\{1,2\}\to\{1,2\}} \le I(Y_1; U_{\{1,2\}\to\{1,2\}}|Q) \tag{79a}$$

$$L_{1\to\{1,2\}} \le I(Y_1; U_{1\to\{1,2\}}|U_{\{1,2\}\to\{1,2\}}, Q) \tag{79b}$$

$$L_{1\to 1} \le I(Y_1; U_{1\to 1}|U_{1\to\{1,2\}}, U_{\{1,2\}\to\{1,2\}}, Q) \tag{79c}$$

Tab. VII is useful in deriving the codebook rates at decoder 2:

$$L_{\{1,2\}\to\{1,2\}} \le I(Y_2; U_{\{1,2\}\to\{1,2\}}|Q) \tag{80a}$$

$$L_{\{1,2\}\to 2} \le I(Y_2; U_{\{1,2\}\to 2}|U_{\{1,2\}\to\{1,2\}}, Q) \tag{80b}$$

$$L_{1\to\{1,2\}} + L_{2\to 2} \le I(Y_2; U_{1\to\{1,2\}}, U_{2\to 2}|U_{\{1,2\}\to\{1,2\}}) + I(U_{1\to\{1,2\}}, U_{\{1,2\}\to 2}|U_{\{1,2\}\to\{1,2\}}, Q) \tag{80c}$$

$$L_{1\to\{1,2\}} \le I(Y_2; U_{1\to\{1,2\}}|U_{\{1,2\}\to\{1,2\}}) + I(U_{1\to\{1,2\}}, U_{\{1,2\}\to 2}|U_{\{1,2\}\to\{1,2\}}, Q) \tag{80d}$$

$$L_{1\to 2} + L_{2\to 2} \le I(Y_2; U_{1\to 2}, U_{2\to 2}|U_{\{1,2\}\to\{1,2\}}, U_{\{1,2\}\to 2}, U_{1\to\{1,2\}}, Q) \tag{80e}$$

$$L_{2\to 2} \le I(Y_2; U_{1\to 2}, U_{2\to 2}|U_{\{1,2\}\to\{1,2\}}, U_{\{1,2\}\to 2}, U_{1\to\{1,2\}}, U_{1\to 2}, Q) \tag{80f}$$

$$L_{1\to 2} \le I(Y_2; U_{1\to 2}, U_{2\to 2}|U_{\{1,2\}\to\{1,2\}}, U_{\{1,2\}\to 2}, U_{1\to\{1,2\}}, U_{2\to 2}, Q) \tag{80g}$$

TABLE VIII
DECODING ERROR EVENT TABLE USING TH. V.11 FOR CIFC IN (30g) FOR DECODER 1 IN SEC. V-C5

	$U_{\{1,2\}\to\{1,2\}}$	$U_{1\to\{1,2\}}$	$U_{1\to 1}$	distribution
D1	×	…	…	P_{Y_1}
D2	✓	×	…	$P_{Y_1 \mid U_{\{1,2\}\to\{1,2\}}}$
D3	✓	✓	×	$P_{Y_1 \mid U_{1\to\{1,2\}}, U_{\{1,2\}\to\{1,2\}}}$

4) Decoding error analysis using joint decoding and the packing lemma: The derivation of the codebook rate bounds using the sequential decoding is conceptually simple and, as for Th. V.4, it provides an intuitive understanding on the condition that allows successful decoding. Joint decoding is a more sophisticated bound on the decoding error events and provides better a bound on the codebook rates. Again, the packing lemma of Th. V.3 provides the theoretical tool to bound the error probability.

Theorem V.11. Decoding error analysis using joint decoding and the packing lemma:

For any CGRAS, the decoding procedure described in Sec. IV-D is successful with high probability as $N \to \infty$ if , for any receiver z and for any subset $\mathbf{S} \subset \mathbf{S}_{\mathbf{D}}^{z}$ such that

$$(\mathbf{i},\mathbf{j}) \in \mathbf{S} \implies (\mathbf{l},\mathbf{m}) \in \mathbf{S}, \ \forall \ (\mathbf{l},\mathbf{m}) \ \text{ s.t. } U_{\mathbf{l}\to\mathbf{m}} \overline{<} U_{\mathbf{i}\to\mathbf{j}}, \tag{81}$$

for $\mathbf{S}_{\mathbf{D}}^{z}$ defined in (63)*, the following holds:*

$$\sum_{(\mathbf{i},\mathbf{j})\in\mathbf{S}} L_{\mathbf{i}\to\mathbf{j}} \le \mathbf{I}_{\mathbf{S}}^{\mathrm{J.D}}, \tag{82}$$

where

$$\begin{aligned} \mathbf{I}_{\mathbf{S}}^{z, \ J.D} &= \mathbb{E}_{Y_z, \ \mathbf{S}}[\log P_{Y_z, \ \text{encoding}|\overline{\mathbf{S}}}] - \mathbb{E}_{Y_z, \ \mathbf{S}}[\log P_{Y_z,\text{decoding}|\overline{\mathbf{S}}}] && \text{(83a)} \\ &= I(Y_z; \{U_{\mathbf{i}\to\mathbf{j}}, (\mathbf{i},\mathbf{j}) \in \mathbf{S}\} | \{U_{\mathbf{l}\to\mathbf{m}}, \ (\mathbf{l},\mathbf{m}) \in \overline{\mathbf{S}}\}, Q) && \text{(83b)} \\ &\quad + \sum_{(\mathbf{i},\mathbf{j}) \ \in \ \mathbf{S}} I(U_{\mathbf{i}\to\mathbf{j}}; \{U_{\mathbf{l}\to\mathbf{m}}, \ U_{\mathbf{i}\to\mathbf{j}} \overset{\leftarrow}{\lessdot} U_{\mathbf{l}\to\mathbf{m}}, \ (\mathbf{l},\mathbf{m}) \in \mathbf{S}\} | \{U_{\mathbf{l}\to\mathbf{m}}, \ U_{\mathbf{i}\to\mathbf{j}} \overline{<} U_{\mathbf{l}\to\mathbf{m}} \ \in \ \overline{\mathbf{S}}\}, Q), && \text{(83c)} \end{aligned}$$

(where J.D *stands for* joint decoding*) and where $\mathbb{E}_{Y_z, \ \mathbf{S}}$ indicates the expectation is taken over the channel output Y_z and $U_{\mathbf{i}\to\mathbf{j}} \in \mathbf{S}$ and where $P_{Y_z, \ \text{encoding}|\overline{\mathbf{S}}}$ and $P_{Y_z, \ \text{encoding}|\overline{\mathbf{S}}}$ are defined as in* (70)*.*

Proof:

The proof of Th. V.11 is very similar to the proof of Th. V.8. The difference is the bounding of the term $\mathbb{P}[D_{\mathbf{S}}]$. In Th. V.8 we bound the probability of specific decoding error sequence $D_{\mathbf{S}}$ as the probability that the codewords indexed by $\mathbf{S}^z - \mathrm{root}_{\mathbf{D}}$ are incorrectly decoded and then use the packing lemma for this set. In Th. V.11, instead, we apply the packing lemma to the elements indexed by $\mathbf{S}$ directly. Despite the fact that Th. V.11 conceptually provides a more refined bound on the error probabilities than Th. V.8, we are not able to compare the bounds on the codebook rates obtained with these two methods for a general channel. The complete proof is provided in App. G. ■

Condition (66) is equivalent to condition (81) and is restated here only for clarity.

Remark V.12. Although the rate bounds in Th. V.8 and Th. V.11 have similar expressions, it is not straightforward to compare the corresponding rate regions for the general channel model we consider. It is generally believed that the Th. V.11 yields a larger bound for the codebook rates than Th. V.8 since the former theorem is based on a better bound of the decoding error probability.

5) Bounds on the codebook rates using the Th. V.11 for CIFC:

As for Sec. V-A3, we illustrate the result in Th. V.6 by considering the CGRAS in (30g), also depicted in Fig. 6. The achievable scheme and some basic notations are introduced in Sec. V-B1. Following the notation in Sec. V-C3, we use Tab. (VIII) and (IX) to calculate the terms $\mathbf{I}_{\mathbf{S}}^{z, \ J.D}$ in (83).

Using Tab. VIII we come to the following bounds on the codebook rates at decoder 1:

$$\begin{aligned} L_{\{1,2\}\to\{1,2\}} + L_{1\to\{1,2\}} + L_{1\to 1} &\le I(Y_1; U_{\{1,2\}\to\{1,2\}}, U_{1\to\{1,2\}}, U_{1\to 1}|, Q) && \text{(84a)} \\ L_{1\to\{1,2\}} + L_{1\to 1} &\le I(Y_1; U_{1\to\{1,2\}}, U_{1\to 1} | U_{\{1,2\}\to\{1,2\}}, Q) && \text{(84b)} \\ L_{1\to 1} &\le I(Y_1; U_{1\to 1} | U_{\{1,2\}\to\{1,2\}}, U_{1\to\{1,2\}}, Q). && \text{(84c)} \end{aligned}$$

TABLE IX
DECODING ERROR EVENT TABLE USING TH. V.8 FOR CIFC IN (30g) FOR DECODER 2 FOR SEC. V-C3

	$U_{\{1,2\}\to\{1,2\}}$	$U_{\{1,2\}\to 2}$	$U_{1\to\{1,2\}}$	$U_{1\to 2}$	$U_{2\to 2}$	$P_{Y_z,\ \text{dencoding}\|\overline{\mathbf{S}}}$
D1	×	…	…	…	…	P_{Y_1}
D2	✓	×	…	…	…	$P_{Y_1\|U_{\{1,2\}\to\{1,2\}}}$
D3	✓	✓	×	…	×	$P_{Y_1\|U_{\{1,2\}\to\{1,2\}},U_{\{1,2\}\to 2}}$
D4	✓	✓	×	…	✓	$P_{Y_1\|U_{\{1,2\}\to\{1,2\}},U_{\{1,2\}\to 2},U_{2\to 2}}$
D5	✓	✓	✓	×	×	$P_{Y_1\|U_{\{1,2\}\to\{1,2\}},U_{\{1,2\}\to 2},U_{1\to\{1,2\}}}$
D6	✓	✓	✓	✓	×	$P_{Y_1\|U_{\{1,2\}\to\{1,2\}},U_{\{1,2\}\to 2},U_{1\to\{1,2\}},U_{1\to 2}}$
D7	✓	✓	✓	×	✓	$P_{Y_1\|U_{\{1,2\}\to\{1,2\}},U_{\{1,2\}\to 2},U_{1\to\{1,2\}},U_{2\to 2}}$
D8	✓	✓	✓	✓	✓	successful decoding

Using Tab. VIII we come to the following bounds on the codebook rates at decoder 1:

$$\begin{aligned}
L_{\{1,2\}\to\{1,2\}} + L_{1\to\{1,2\}} + L_{\{1,2\}\to 2} + L_{2\to 2} + L_{1\to 2} &\le I(Y_1; U_{\{1,2\}\to\{1,2\}}, U_{1\to\{1,2\}}, U_{\{1,2\}\to 2}, U_{2\to 2}, U_{1\to 2}|Q) \\
&\quad + I(U_{1\to\{1,2\}}; U_{2\to\{1,2\}}|U_{\{1,2\}\to\{1,2\}}, Q) && \text{(85a)}\\
L_{1\to\{1,2\}} + L_{\{1,2\}\to 2} + L_{2\to 2} + L_{1\to 2} &\le I(Y_1; U_{1\to\{1,2\}}, U_{\{1,2\}\to 2}, U_{2\to 2}, U_{1\to 2}|U_{\{1,2\}\to\{1,2\}}, Q) \\
&\quad + I(U_{1\to\{1,2\}}; U_{2\to\{1,2\}}|U_{\{1,2\}\to\{1,2\}}, Q) && \text{(85b)}\\
L_{1\to\{1,2\}} + L_{2\to 2} + L_{1\to 2} &\le I(Y_1; U_{1\to\{1,2\}}, U_{2\to 2}, U_{1\to 2}|U_{\{1,2\}\to\{1,2\}}, U_{\{1,2\}\to 2}, Q) \\
&\quad + I(U_{1\to\{1,2\}}; U_{2\to\{1,2\}}|U_{\{1,2\}\to\{1,2\}}, Q) && \text{(85c)}\\
L_{1\to\{1,2\}} + L_{1\to 2} &\le I(Y_1; U_{1\to\{1,2\}}, U_{1\to 2}|U_{\{1,2\}\to\{1,2\}}, U_{\{1,2\}\to 2}, U_{2\to 2}, Q) \\
&\quad + I(U_{1\to\{1,2\}}; U_{2\to\{1,2\}}|U_{\{1,2\}\to\{1,2\}}, Q) && \text{(85d)}\\
L_{1\to 2} + L_{2\to 2} &\le I(Y_1; U_{1\to 2}, U_{2\to 2}|U_{\{1,2\}\to\{1,2\}}, U_{\{1,2\}\to 2}, U_{1\to\{1,2\}}, Q) && \text{(85e)}\\
L_{2\to 2} &\le I(Y_1; U_{2\to 2}|U_{\{1,2\}\to\{1,2\}}, U_{\{1,2\}\to 2}, U_{1\to\{1,2\}}, U_{1\to 2}, Q) && \text{(85f)}\\
L_{1\to 2} &\le I(Y_1; U_{1\to 2}|U_{\{1,2\}\to\{1,2\}}, U_{\{1,2\}\to 2}, U_{1\to\{1,2\}}, U_{2\to 2}, Q). && \text{(85g)}
\end{aligned}$$

The term $I(U_{1\to\{1,2\}}; U_{2\to\{1,2\}}|U_{\{1,2\}\to\{1,2\}})$ can be interpreted as the improvement on the codebook rates provided by binning: since $U_{1\to\{1,2\}} \lessdot U_{2\to\{1,2\}}$, the decoder looks for two codewords $U^N_{1\to\{1,2\}}, U^N_{2\to\{1,2\}}$ that have the typicality properties imposed by the encoding procedure. This is an extra requirement on the decoded codewords that makes the decoding errors less likely. This term is present only when either or both the two codewords are incorrectly decoded, since this advantage is present only when one of the two codewords is incorrect.

Note that Tab. VIII and IX are very similar to Tab. VI and Tab. VII: given the similarity in the proofs of the two theorems, the codebook bounds are derived in a very similar manner. In the following we will use only one table to represent both cases by simply adding the last column of one graph to the other.

Remark V.13. When designing achievable schemes, one often rate splits a message into common and private parts, imposing the decoding of part of a user's message to another user who is not interested in this common message. In this case the wrong decoding of the rate-split common message does not represent a decoding error for the non intended user. From this it follows that some of the error events in Th. V.8 and in Th. V.11 are not actually error events for some of the users. In this specific instance the bounds of the codebook rate are no longer valid and the overall region larger. Our model does not cover this case but such occurrence can easily be taken into consideration when deriving achievable schemes for specific channel models.

D. Achievable region

We can finally combine the results in Sec. V.4, Sec. V.6, Sec. V-C2 and Sec. V-C4 to come to the main theorem of this paper.

Theorem V.14. Achievable region *For any CGRAS a rate vector* $\mathbf{R}$ *is achievable if there exists a time-sharing RV Q as defined in* (9), *a rate-splitting matrix* Γ *as defined in* (II-E), *and a binning rate vector* $\overline{\mathbf{R}}$ *such that* $\overline{\mathbf{R}}$ *satisfies the constraint in Th. V.4 or Th. V.6 and* $\overline{\mathbf{L}} = \mathbf{R}' + \overline{\mathbf{R}}$ *satisfies the constraint in Th. V.8 or Th. V.11.*

VI. ACHIEVABLE SCHEMES FOR CLASSIC MULTI-TERMINAL NETWORKS

We now re-examine the multi-terminal networks in Tab. III and re-obtain some of the achievable region involved in the capacity results in Tab. I. The purpose of this section is twofold: First, we show how the CGRAS provides an important tool to quickly derive achievable schemes for a large class of channel; by carefully tabulating the error events and making a few simple calculations, one is able to determine an achievable region for the channel under study. Second, the CGRAS provides an important tool to explore the possible transmission strategies available on a channel. Given the distribution of the message and the channel model, one immediately sees how to apply superposition coding and binning among the different codewords. Both of these observations about the CGRAS makes it a very important tool to approach a number if information theoretical problems. In this section we also hope to familiarize the reader with the construction of the CGRAS and of the derivation of the rate bounds.

A. Multiple access channel with common information

The Multiple Access Channel (MAC) is a three-terminal network where two transmitters want to each communicate a message to a decoder. In this section we consider the Multiple Access Channel with Common Messages (MAC-CM), where the transmitters send an additional message, known at both receivers, to the receiver. This model is obtained from the from the general interference channel when $\mathcal{C}\left(\left\{R_{1\to 1}, R_{2\to 1}, R_{\{1,2\}\to 1}\right\}\right)$, that is when the rates different from $R_{1\to 1}, R_{2\to 1}$ and $R_{\{1,2\}\to 1}$ are all set to zero. The capacity of MAC was determined by Ahlswede [12] and Liao [16] while the capacity of the case with common messages was shown by Slepian and Wolf [43].

Since there is only one receiver, it is possible to split the message $W_{\mathbf{l}\to\mathbf{m}}$ only in a sub-message of the form $W_{\mathbf{l}\to\mathbf{m}}^{[\mathbf{i}\to\mathbf{m}]}$. The set of all possible $\mathbf{l}$ is $\{1, 2, \{1, 2\}\}$ and thus rate-splitting does not increase the number of messages transmitted over the channel.

Without loss of generality we can define the matrix $\Gamma_{\mathrm{MAC-CM}}$ as

$$\Gamma_{\mathrm{MAC-CM}} = \left[\begin{array}{lll} 1-\alpha & 0 & \alpha \\ 0 & 1-\beta & \beta \\ 0 & 0 & 1-\alpha-\beta \end{array}\right],$$

so that (II-E) becomes

$$\mathbf{R}' = \left[\begin{array}{l} R'_{1\to 1} \\ R'_{2\to 1} \\ R'_{\{1,2\}\to 1} \end{array}\right] = \left[\begin{array}{ll} (1-\alpha)R_{1\to 1}+ & \alpha R_{\{1,2\}\to 1} \\ (1-\beta)R_{2\to 1}+ & \alpha R_{\{1,2\}\to 1} \\ & (1-\alpha-\beta)R_{\{1,2\}\to 1} \end{array}\right]. \tag{86}$$

By considering all the possible choices of $(\alpha, \beta) \in [0, 1]^2$ one obtains all the possible rate-splitting choices. Taking the union over all the rate-splitting matrices for an achievable region $\mathcal{A}_{\mathbf{R}'}$ vector produces the convex hull $H_{\mathrm{convex}}(\mathcal{A}_{\mathbf{R}'})$.

Given the distribution of the messages, the possible edges in ***S*** and ***B*** are:

$$U_{1\to 1} \overline{<} U_{\{1,2\}\to 1}, \tag{87a}$$
$$U_{2\to 1} \overline{<} U_{\{1,2\}\to 1}, \tag{87b}$$
$$U_{1\to 1} \lessdot U_{\{1,2\}\to 1}, \tag{87c}$$
$$U_{2\to 1} \lessdot U_{\{1,2\}\to 1}. \tag{87d}$$

One can now obtain a number of achievable regions by combining these edges in (87) in different ways. Here, and also for the following examples, we focus on three transmission strategies: one employing only superposition coding, one only binning, and one involving both. More specifically:

1) **Superposition coding scheme:**

$$U_{1\to 1} \overline{<} U_{\{1,2\}\to 1}, \tag{88a}$$
$$U_{1\to 2} \overline{<} U_{\{1,2\}\to 1}, \tag{88b}$$

2) **Binning based scheme:**

$$U_{1\to 1} \lessdot U_{\{1,2\}\to 1}, \tag{89a}$$
$$U_{1\to 2} \lessdot U_{\{1,2\}\to 1}, \tag{89b}$$

3) **Binning and superposition based scheme:**

$$U_{1\to 1} \overline{<} U_{\{1,2\}\to 1}, \tag{90a}$$
$$U_{2\to 1} \lessdot U_{\{1,2\}\to 1}. \tag{90b}$$

In each scheme we have

$$P_{\mathrm{encoding}} = P^{1}_{\mathrm{encoding}} = P_Q P_{U_{\{1,2\}\to 1}|Q} P_{U_{2\to 1}|U_{\{1,2\}\to 1},Q} P_{U_{1\to 1}} | U_{\{1,2\}\to 1,Q} \tag{91}$$

The three schemes are depicted in Fig. 7: the convention used to represent the CGRAS is the same as in Fig. 4, Fig. 5 and Fig. 6: the only variation here is that we have added violet rectangles to identify the common message.

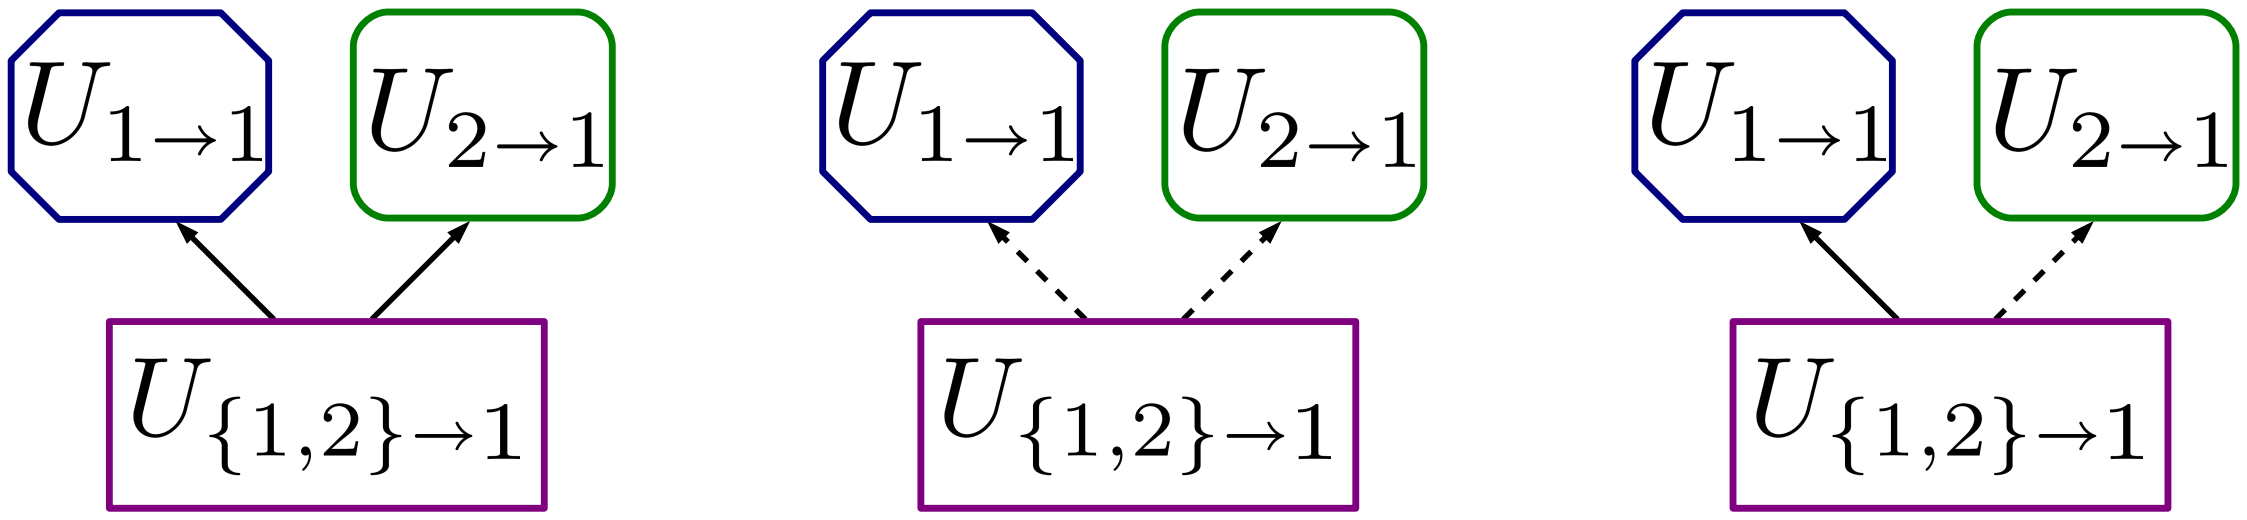

(a) Superposition coding based scheme. (b) Binning based scheme. (c) Binning and superposition based scheme

Fig. 7. Different achievable schemes for the MAC-CM channel.

TABLE X
DECODING ERROR OF EVENT TABLE FOR THE CGRAS IN (88), ALSO PICTURED IN FIG. 7(A).

	$U_{\{1,2\}\to1}$	$U_{1\to1}$	$U_{2\to1}$	$P_{Y_1\vert\overline{\mathbf{S}}}$
D1	☒	…	…	P_{Y_1}
D2	✓	☒	☒	$P_{Y_1\vert U_{\{1,2\}\to1}}$
D3	✓	✓	☒	$P_{Y_1\vert U_{2\to1},U_{\{1,2\}\to1}}$
D4	✓	☒	✓	$P_{Y_1\vert U_{1\to1},U_{\{1,2\}\to1}}$

1) *Superposition coding based scheme for the MAC-CM:*

Let's consider first the scheme with only superposition in (88), also pictured in Fig. 7(a). Since there is no binning edge, the graph representing the achievable scheme is an ADG and thus we indeed have CGRAS. Also, since no binning is performed, encoding is always successful as $P_{\text{encoding}} = P_{\text{codebook}}$ and we can set $\overline{R}_{\mathbf{i}\to\mathbf{j}} = 0,\ \forall(\mathbf{i},\mathbf{j})$.

As we have seen in Sec. V-C that a single table can be used to represent the bounds in both Th. V.4 and Th. V.6: Tab. VI-A1 is the single table for the CGRAS in (88).

With the help of Tab. VI-A1, we conclude that the achievable region with successive decoding is

$$R_{\{1,2\}\to1} \le I(Y_1; U_{\{1,2\}\to1}|Q) \tag{92a}$$
$$R_{1\to1} \le I(Y_1; U_{1\to1}|U_{\{1,2\}\to1}, Q) \tag{92b}$$
$$R_{2\to1} \le I(Y_1; U_{2\to1}|U_{\{1,2\}\to1}, Q), \tag{92c}$$

while the achievable region with joint decoding is

$$R_{\{1,2\}\to1} + R_{1\to1} + R_{2\to1} \le I(Y_1; U_{\{1,2\}\to1}, U_{1\to1}, U_{2\to1}|Q) \tag{93a}$$
$$R_{1\to1} \le I(Y_1; U_{1\to1}|U_{\{1,2\}\to1}, Q) \tag{93b}$$
$$R_{2\to1} \le I(Y_1; U_{2\to1}|U_{\{1,2\}\to1}, Q), \tag{93c}$$

for any distribution that factors as (91).

Note that

$$\text{(93a)} = I(Y_1; U_{\{1,2\}\to1}|Q) + I(Y_1; U_{1\to1}, U_{2\to1}|U_{\{1,2\}\to1}, Q) \tag{94a}$$
$$= I(Y_1; U_{\{1,2\}\to1}|Q) + I(Y_1; U_{1\to1}|U_{\{1,2\}\to1}, Q) + I(Y_1; U_{2\to1}|U_{\{1,2\}\to1}, Q) \tag{94b}$$
$$= \text{(92a)} + \text{(92b)} + \text{(92c)}, \tag{94c}$$

so the achievable region with joint decoding includes the achievable region with sequential decoding for any fixed codebook distribution (91).

2) *Binning based scheme for the MAC-CM:*

Let's consider the scheme with only binning in (89), also pictured in Fig. 7(b). The graph of this achievable scheme is a UDG thus we indeed have CGRAS. For this scheme

$$P_{\text{codebook}} = P_Q P_{U_{\{1,2\}\to1}|Q} P_{U_{1\to1}|Q} P_{U_{2\to1}|Q}, \tag{95}$$

and thus

$$\mathbf{I}^{\text{encoding}}_{\text{codebook}} = I(U_{\{1,2\}\to1}; U_{1\to1}|Q) + I(U_{\{1,2\}\to1}; U_{2\to1}|Q) \tag{96}$$

The encoding fails when it is not possible to determining the bin indexes $b_{1\to1}$ and $b_{1\to2}$ such that $U_{1\to1}(w_{1\to1}, w_{1\to1})$ and $U_{2\to1}(w_{2\to1}, w_{2\to1})$ appear to be generated conditionally dependent from $U_{\{1,2\}\to1}$ although generated independently from this

TABLE XI
ENCODING ERROR OF EVENT TABLE FOR THE CGRAS IN (89), ALSO PICTURED IN FIG. 7(B)

	$U_{1\to1}$	$U_{2\to1}$	distribution for Th. V.4	$\mathbf{I}_{\mathbf{S}}^{\text{M.C.L.}}$ for Th. V.6
E1	☒	☒	$P_{U_{\{1,2\}\to1}}P_{U_{1\to1}}P_{U_{2\to1}}$	0
E2	✓	☒	$P_{U_{\{1,2\}\to1}}P_{U_{1\to1}}P_{U_{2\to1}\|U_{\{1,2\}\to1}}$	$I(U_{2\to1};U_{\{1,2\}\to1}\|Q)$
E3	☒	✓	$P_{U_{\{1,2\}\to1}}P_{U_{1\to1}\|U_{\{1,2\}\to1}}P_{U_{2\to1}}$	$I(U_{1\to1};U_{\{1,2\}\to1}\|Q)$

codeword. These two bin indexes are determined independently from each other, so we do not expect any difference between the rate bounds obtained with Th. V.4 and Th. V.6.

As pointed out in Sec. V-C, a single table can be used to represent the bounds in both Th. V.8 and Th. V.11: Tab. XI is the single table for the CGRAS in (89).

With the help of Tab. XII , we have the binning rates bound obtained by both Th. V.8 and Th. V.11, which are:

$$\overline{R}_{1\to1}+\overline{R}_{2\to1}\geq I(U_{\{1,2\}\to1};U_{1\to1},U_{2\to1}|Q) \tag{97a}$$
$$\overline{R}_{1\to1}\geq I(U_{\{1,2\}\to1};U_{1\to1}|Q) \tag{97b}$$
$$\overline{R}_{2\to1}\geq I(U_{\{1,2\}\to1};U_{2\to1}|Q). \tag{97c}$$

The decoding error table is for this achievable scheme is again Tab. VI-A1. The bounds on the codebook rates that we obtain from Tab. VI-A1 are:

$$L_{\{1,2\}\to1}\leq I(Y_1;U_{\{1,2\}\to1}|Q) \tag{98a}$$
$$L_{1\to1}\leq I(Y_1;U_{1\to1}|U_{\{1,2\}\to1},Q)+I(U_{\{1,2\}\to1};U_{1\to1}|Q) \tag{98b}$$
$$L_{2\to1}\leq I(Y_1;U_{2\to1}|U_{\{1,2\}\to1},Q)+I(U_{\{1,2\}\to1};U_{2\to1}|Q), \tag{98c}$$

while using joint decoding we have:

$$L_{\{1,2\}\to1}+L_{1\to1}+L_{1\to2}\leq I(Y_1;U_{\{1,2\}\to1},U_{1\to1},U_{2\to1})+I(U_{\{1,2\}\to1};U_{1\to1},U_{2\to1}|Q) \tag{99a}$$
$$L_{1\to1}\leq I(Y_1;U_{1\to1}|U_{\{1,2\}\to1},Q)+I(U_{\{1,2\}\to1};U_{1\to1}|Q) \tag{99b}$$
$$L_{2\to1}\leq I(Y_1;U_{2\to1}|U_{\{1,2\}\to1},Q)+I(U_{\{1,2\}\to1};U_{2\to1}|Q). \tag{99c}$$

As for (94), the region obtained with joint decoding is larger than the one for sequential decoding.

In order to obtain the rate vector $\mathbf{R}$ from $\mathbf{L}$ and $\overline{\mathbf{R}}$ we can use the Fourier-Motzkin elimination procedure. The Fourier-Motzkin Elimination (FME) [44] is for eliminating variables from a system of linear inequalities. The FME is a crucial tool to obtain achievable regions for multi-terminal networks as it allows one to obtain an expression of the achievable region in the message rates $\mathbf{R}$ from a region expressed using the rate-splitting rates $\overline{\mathbf{R}}$. The FME of the codebook bounds on $\mathbf{L}$ using joint decoding in (99) and the region on the binning rates (97) is

$$R_{\{1,2\}\to1}+R_{1\to1}+R_{2\to1}\leq I(Y_1;U_{\{1,2\}\to1},U_{1\to1},U_{2\to1}|Q) \tag{100a}$$
$$R_{1\to1}\leq I(Y_1;U_{1\to1}|U_{\{1,2\}\to1},Q) \tag{100b}$$
$$R_{2\to1}\leq I(Y_1;U_{2\to1}|U_{\{1,2\}\to1},Q), \tag{100c}$$

which is the capacity region.

3) Superposition coding and binning based scheme for the MAC-CM:

Let's consider now the scheme with only superposition in (90), also pictured in Fig. 7(c). Since there is no joint binning in this scheme, the graph representing the achievable scheme is an ADG and thus we indeed have CGRAS.

Since there is only one bin index to determine $b_{2\to1}$, there is only one error event and there is no difference between the encoding error analysis between Th. V.4 and Th. V.6 which both yield the bound:

$$\overline{R}_{2\to1}\geq I(U_{2\to1};U_{\{1,2\}\to1}|Q).$$

Again Tab. XII helps us derive the codebook rate for the sequential decoding case:

$$R_{\{1,2\}\to1}\geq I(Y_1;U_{\{1,2\}\to1}) \tag{101a}$$
$$R_{1\to1}\geq I(Y_1;U_{1\to1}|U_{\{1,2\}\to1}) \tag{101b}$$
$$L_{2\to1}\geq I(Y_1;U_{2\to1}|U_{\{1,2\}\to1}), \tag{101c}$$

as well as the codebook bounds for the joint decoding case:

$$R_{\{1,2\}\to 1} + R_{1\to 1} + L_{1\to 2} \le I(Y_1; U_{\{1,2\}\to 1}, U_{1\to 1}, U_{2\to 1}) + I(U_{\{1,2\}\to 1}; U_{2\to 1}) \tag{102a}$$

$$R_{1\to 1} \le I(Y_1; U_{1\to 1} | U_{\{1,2\}\to 1}) \tag{102b}$$

$$L_{2\to 1} \le I(Y_1; U_{2\to 1} | U_{\{1,2\}\to 1}) + I(U_{\{1,2\}\to 1}; U_{2\to 1}), \tag{102c}$$

$$\tag{102d}$$

The Fourier-Motzkin elimination of the encoding and decoding bound yields

$$R_{\{1,2\}\to 1} + R_{1\to 1} + R_{2\to 1} \le I(Y_1; U_{\{1,2\}\to 1}, U_{1\to 1}, U_{2\to 1}) \tag{103a}$$

$$R_{1\to 1} \le I(Y_1; U_{1\to 1} | U_{\{1,2\}\to 1}) \tag{103b}$$

$$R_{2\to 1} \le I(Y_1; U_{2\to 1} | U_{\{1,2\}\to 1}), \tag{103c}$$

which is again the capacity region.

In this section we have seen that superposition coding, binning, and a mixture of the two strategies, achieve capacity for the MAC channel. This result is somewhat surprising giving the different nature of the encoding schemes. Note that proving capacity using binning requires the use of the FME, which becomes more and more complex as the number of binning indexes increases.

B. Broadcast channel with common messages

The Broadcast Channel (BC) is a three-terminal network where one receiver communicates two messages to two decoders. In this section we consider the Broadcast Channel with Common Messages (BC-CM), where the receiver sends an additional message to be decoded at both receivers. This model is obtained from the general interference channel when $\mathcal{C}\left(\left\{R_{1\to 1}, R_{1\to 2}, R_{1\to\{1,2\}}\right\}\right)$, that is, when the rates different from $R_{1\to 1}, R_{1\to 2}$ and $R_{1\to\{1,2\}}$ are all set to zero.

The broadcast channel was first studied by Cover in 1972 [30]. The largest region for the general BC channel is derived by Marton [37] and represents capacity for the degraded BC [30], [7], [8], the deterministic BC [45], the less noisy BC, and the more capable BC [18]. For the degraded BC, the less noisy BC, and the more capable BC, superposition coding achieves capacity while binning achieves capacity for the deterministic broadcast channel.

As for the MAC-BC, rate-splitting does not increase the number of messages to be transmitted over the channel: since there is only one decoder, $W_{\mathbf{i}\to\mathbf{j}}$ can be rate-spitted only in messages of the form $W_{\mathbf{i}\to\mathbf{j}}^{\mathbf{i}\to\mathbf{l}}$. Moreover there are only two decoders, so $\mathbf{l}$ can only take values in $\{\{1,2\},1,2\}$.

Without loss of generality we can define the matrix $\Gamma_{\mathrm{BC-CM}}$ as:

$$\Gamma_{\mathrm{BC-CM}} = \left[\begin{array}{lll} 1-\alpha & 0 & \alpha \\ 0 & 1-\beta & \beta \\ 0 & 0 & 1-\alpha-\beta \end{array}\right],$$

so that (II-E) becomes

$$\mathbf{R}' = \left[\begin{array}{l} R'_{1\to 1} \\ R'_{2\to 1} \\ R'_{1\to\{1,2\}} \end{array}\right] = \left[\begin{array}{ll} (1-\alpha)R_{1\to 1}+ & \alpha R_{\{1,2\}\to 1} \\ (1-\beta)R_{1\to 2}+ & \alpha R_{\{1,2\}\to 1} \\ & (1-\alpha-\beta)R_{1\to\{1,2\}} \end{array}\right]. \tag{104}$$

By considering all the possible choices of $(\alpha,\beta) \in [0,1]^2$ one obtains all the possible rate-splitting choices. Taking the union over all the rate-splitting matrices for an achievable region $\mathcal{A}_{\mathbf{R}'}$ vector produces the convex hull $H_{\mathrm{convex}}(\mathcal{A}_{\mathbf{R}'})$.

Given the distribution of the messages, the possible edges in ***S*** and ***B*** are:

$$U_{1\to 1} \overline{<} U_{1\to\{1\to 2\}} \tag{105a}$$

$$U_{1\to 2} \overline{<} U_{1\to\{1\to 2\}} \tag{105b}$$

$$U_{1\to 1} \lessdot U_{1\to\{1\to 2\}} \tag{105c}$$

$$U_{1\to 2} \lessdot U_{1\to\{1\to 2\}} \tag{105d}$$

$$U_{1\to\{1\to 2\}} \lessdot U_{1\to 1} \tag{105e}$$

$$U_{1\to\{1\to 2\}} \lessdot U_{1\to 2}. \tag{105f}$$

By means of the general approach to the transmission scheme design provided by the CGRAS, we determine alternative transmission schemes to the Marton achievable scheme. As for Sec. VI-A, we focus on three transmission strategies: one employing only superposition coding, one only binning, and one involving both.

1) **Superposition coding scheme:** (Marton scheme)

$$U_{1\to1}\overline{<}U_{1\to\{1,2\}} \tag{106a}$$
$$U_{1\to2}\overline{<}U_{1\to\{1,2\}} \tag{106b}$$
$$U_{1\to2}\lessdot U_{1\to1} \tag{106c}$$
$$U_{1\to1}\lessdot U_{1\to2}, \tag{106d}$$

2) **Binning based scheme.:**

$$U_{1\to1}\lessdot U_{1\to\{1,2\}} \tag{107a}$$
$$U_{1\to2}\lessdot U_{1\to\{1,2\}} \tag{107b}$$
$$U_{1\to\{1,2\}}\overline{<}U_{1\to1} \tag{107c}$$
$$U_{1\to\{1,2\}}\overline{<}U_{1\to2} \tag{107d}$$
$$U_{1\to2}\lessdot U_{1\to1} \tag{107e}$$
$$U_{1\to1}\lessdot U_{1\to2}, \tag{107f}$$

3) **Binning and superposition based scheme:**

$$U_{1\to1}\lessdot U_{1\to\{1,2\}} \tag{108a}$$
$$U_{1\to2}\lessdot U_{1\to\{1,2\}} \tag{108b}$$
$$U_{1\to\{1,2\}}\overline{<}U_{1\to1} \tag{108c}$$
$$U_{1\to2}\lessdot U_{1\to1} \tag{108d}$$
$$U_{1\to1}\lessdot U_{1\to2}. \tag{108e}$$

In each scheme we have that

$$P_{\text{encoding}} = P_Q P_{U_{1\to\{1,2\}}U_{1\to1}U_{1\to2}|Q}, \tag{109}$$

with

$$P^1_{\text{encoding}} = P_Q P_{U_{1\to\{1,2\}}U_{1\to1}|Q}, \tag{110}$$

and

$$P^2_{\text{encoding}} = P_Q P_{U_{1\to\{1,2\}}U_{1\to2}|Q}, \tag{111}$$

The three schemes are depicted in Fig. VI-B: the convention used is the same as for the previous representations of CGRASs.

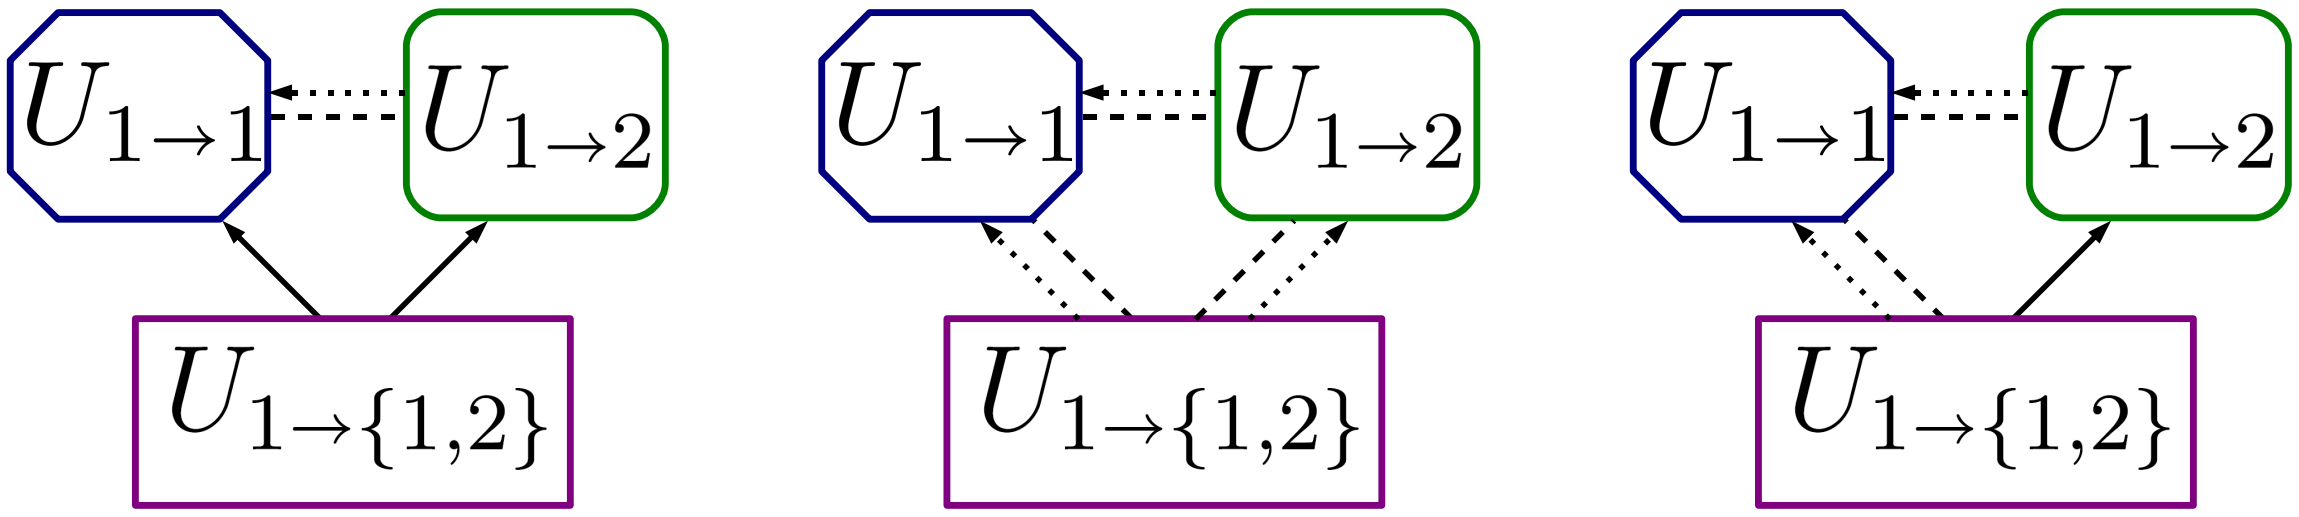

(a) Superposition coding based scheme. (b) Binning based scheme. (c) Binning and superposition based scheme.

Fig. 8. Different achievable schemes for the BC-CM channel.

TABLE XII
ENCODING ERROR OF EVENT TABLE FOR THE CGRAS IN (88), ALSO PICTURED IN FIG. 8(A).

	$U_{1\to 1}$	$U_{1\to 2}$	distribution for Th. V.4	$\mathbf{I}_{\mathbf{S}}^{\text{M.C.L.}}$ for Th. V.6
E1	☒	☒	$P_{U_{1\to\{1,2\}}} P_{U_{1\to 1}\mid U_{1\to\{1,2\}}} P_{U_{2\to 1}\mid U_{1\to\{1,2\}}}$	0
E2	✓	☒	$P_{U_{1\to\{1,2\}}} P_{U_{1\to 1}\mid U_{1\to\{1,2\}}} P_{U_{1\to 2}}$	$I(U_{1\to 1}; U_{1\to 2}\mid U_{1\to\{1,2\}}, Q)$
E3	☒	✓	$P_{U_{\{1,2\}\to 1}} P_{U_{1\to 1}} P_{U_{1\to 2}\mid U_{\{1,2\}\to 1}}$	$I(U_{1\to 1}; U_{1\to 2}\mid U_{1\to\{1,2\}}, Q)$

TABLE XIII
DECODING ERROR OF EVENT TABLE FOR THE CGRAS IN (88), ALSO PICTURED IN FIG. 8(A).

	$U_{1\to\{1,2\}}$	$U_{1\to 1}$	$P_{Y_1\mid\overline{\mathbf{S}}}$
D1	☒	$\ldots$	P_{Y_1}
D2	✓	☒	$P_{Y_1\mid U_{\{1,2\}\to 1}}$

1) Superposition coding based scheme for the BC-CM:

Let's consider first the scheme with only superposition in (106), also pictured in Fig. 8(a) which corresponds to the Marton scheme for the BC in [37]. This scheme satisfies the condition of Th. III.1 and is thus a CGRAS. The equivalent ADG is obtained by choosing an orientation for the undirected edge $U_{1\to 1} \lessdot\!\gtrdot U_{1\to 2}$.

This scheme has two bin indexes $b_{1\to 1}$ and $b_{1\to 2}$ and the possible encoding error events can be found in Tab. XII.

The encoding error analysis using Th. V.4 yields the bounds

$$\overline{R}_{1\to 1} + \overline{R}_{1\to 2} \geq I(U_{1\to 1}; U_{1\to 2}\mid U_{1\to\{1,2\}}, Q) \tag{112a}$$

$$\overline{R}_{1\to 2} \geq 0 \tag{112b}$$

$$\overline{R}_{1\to 1} \geq 0, \tag{112c}$$

while Th. V.6 gives the binning rate bounds

$$\overline{R}_{1\to 2} + \overline{R}_{1\to 2} \geq I(U_{1\to 1}; U_{1\to 2}\mid U_{1\to\{1,2\}}, Q), \tag{113}$$

with

$$\mathbf{I}_{\text{codebook}}^{\text{encoding}} = I(U_{1\to 1}; U_{1\to 2}\mid U_{1\to\{1,2\}}, Q).$$

Therefore, as for the achievable regions for MAC in Sec. VI-A, the two theorems yield the same bound on $\overline{R}_{1\to 1}$ and $\overline{R}_{1\to 2}$.

The table representing the possible decoding errors at decoder 1 is Tab. XIII: since the two receivers are symmetric, we only need to derive the codebook bounds for one decoder. The bounds for the other decoder can be obtained by proper rearrangement of the indexes.

The codebook rate bounds obtained with successive decoding at decoder 1 are

$$R_{1\to\{1,2\}} \leq I(Y_1; U_{1\to\{1,2\}}\mid Q) \tag{114a}$$

$$L_{1\to 1} \leq I(Y_1; U_{1\to 1}\mid U_{1\to\{1,2\}}, Q) \tag{114b}$$

$$R_{1\to\{1,2\}} \leq I(Y_2; U_{1\to\{1,2\}}\mid Q) \tag{114c}$$

$$L_{1\to 2} \leq I(Y_2; U_{1\to 2}\mid U_{1\to\{1,2\}}, Q), \tag{114d}$$

while with joint decoding we instead obtain

$$R_{1\to\{1,2\}} + L_{1\to 1} \leq I(Y_1; U_{1\to 1}, U_{1\to\{1,2\}}) \tag{115a}$$

$$L_{1\to 1} \leq I(Y_1; U_{1\to 1}\mid U_{1\to\{1,2\}}) \tag{115b}$$

$$R_{1\to\{1,2\}} + L_{1\to 2} \leq I(Y_2; U_{1\to 2}, U_{1\to\{1,2\}}) \tag{115c}$$

$$L_{1\to 2} \leq I(Y_2; U_{1\to 2}\mid U_{1\to\{1,2\}}). \tag{115d}$$

Again, joint decoding outperforms sequential decoding.

TABLE XIV
ENCODING ERROR OF EVENT TABLE FOR THE CGRAS IN (107), ALSO PICTURED IN FIG. 8(B).

	$U_{1\to\{1,2\}}$	$U_{1\to 1}$	$U_{1\to 2}$	Distribution for Th. V.4	$\mathbf{I}_{\mathbf{S}}^{\text{M.C.L.}}$ for Th. V.6
E1	☒	☒	☒	$P_{U_{1\to\{1,2\}}}P_{U_{1\to 1}}P_{U_{1\to 2}}$	$I(U_{1\to 1};U_{1\to 2})+I(U_{1\to 2};U_{1\to 1},U_{1\to\{1,2\}})$
E2	☒	☒	✓	$P_{U_{1\to\{1,2\}}}P_{U_{1\to 1}}P_{U_{1\to 2}\|U_{1\to\{1,2\}},U_{1\to 1}}$	$I(U_{1\to 2};U_{1\to\{1,2\}})+I(U_{1\to 1};U_{1\to 2},U_{1\to\{1,2\}})$
E3	☒	✓	☒	$P_{U_{1\to\{1,2\}}}P_{U_{1\to 1}\|U_{1\to\{1,2\}},U_{1\to 1}}P_{U_{1\to 2}}$	$I(U_{1\to 1};U_{1\to\{1,2\}})+I(U_{1\to 2};U_{1\to 1},U_{1\to\{1,2\}})$
E4	☒	✓	✓	$P_{U_{1\to\{1,2\}},U_{1\to 1}}P_{U_{1\to 2}}$	$I(U_{1\to\{1,2\}};U_{1\to 1},U_{1\to 2})$
E5	✓	☒	☒	$P_{U_{1\to\{1,2\}}\|U_{1\to 1},U_{1\to 2},}P_{U_{1\to 1}}P_{U_{1\to 2}}$	$I(U_{1\to 1};U_{1\to\{1,2\}})+I(U_{1\to 2};U_{1\to 1},U_{1\to\{1,2\}})$
E6	✓	☒	✓	$P_{U_{1\to\{1,2\}},U_{1\to 1}}P_{U_{1\to 2}}$	$I(U_{1\to 1};U_{1\to 2},U_{1\to\{1,2\}})$
E7	✓	✓	☒	$P_{U_{1\to\{1,2\}},U_{1\to 1}}P_{U_{1\to 2}}$	$I(U_{1\to 2};U_{1\to 1},U_{1\to\{1,2\}})$
E8	✓	✓	✓	$P_{U_{1\to\{1,2\}},U_{1\to 1}}P_{U_{1\to 2}}$	0

By FME of the binning rate bound, and the codebook bounds obtained by joint decoding, we obtain the region:

$$R_{1\to 1} \le I(Y_1;U_{1\to 1}|U_{1\to\{1,2\}},Q) \tag{116a}$$

$$R_{1\to 2} \le I(Y_1;U_{1\to 2}|U_{1\to\{1,2\}},Q) \tag{116b}$$

$$R_{1\to 1}+R_{1\to 2} \le I(Y_1;U_{1\to 1}|U_{1\to\{1,2\}})+I(Y_1;U_{1\to 2}|U_{1\to\{1,2\}})-I(U_{1\to 1};U_{1\to 2}|U_{1\to\{1,2\}},Q) \tag{116c}$$

$$R_{1\to\{1,2\}}+R_{1\to 1} \le I(Y_1;U_{1\to 1},U_{1\to\{1,2\}}|Q) \tag{116d}$$

$$R_{1\to\{1,2\}}+R_{1\to 2} \le I(Y_2;U_{1\to 2},U_{1\{1,2\}}|Q) \tag{116e}$$

$$2R_{1\to\{1,2\}}+R_{1\to 1}+R_{1\to\{1,2\}} \le I(Y_1;U_{1\to 1},U_{1\to\{1,2\}}|Q)+I(Y_2;U_{1\to 2},U_{1\{1,2\}}|Q)-I(U_{1\to 1},U_{1\to 2}|U_{1\to\{1,2\}},Q) \tag{116f}$$

$$R_{1\to 1}+R_{1\to\{1,2\}}+R_{1\to 2} \le I(Y_1;U_{1\to 1}|U_{1\to\{1,2\}},Q)+I(Y_2;U_{1\to 2},U_{1\{1,2\}}|Q)-I(U_{1\to 1},U_{1\to 2}|U_{1\to\{1,2\}},Q) \tag{116g}$$

$$R_{1\to 1}+R_{1\to\{1,2\}}+R_{1\to 2} \le I(Y_2;U_{1\to 2}|U_{1\to\{1,2\}})+I(Y_1;U_{1\to 1},U_{1\{1,2\}})-I(U_{1\to 1},U_{1\to 2}|U_{1\to\{1,2\}}), \tag{116h}$$

It now appears clear that there is a difficulty in applying the FME to obtain an achievable region expressed as a function of **R**. When CGRAS contains even a small number of binning rates, the FME produces a region containing a large number of equations that can no longer be easily manipulated. In particular, it becomes increasingly difficult to match inner and outer bound expressions, especially when the coefficients multiplying the rate bounds are different from one.

2) Binning based scheme for the BC-CM:

Let's consider the scheme with only binning in (107), also pictured in Fig. 8(b). This scheme has three binning indexes and three steps of joint binning: the graph representing the achievable scheme is a UDG and thus it is also a CGRAS. It is easily shown that the equivalent ADG is obtained by choosing any orientation for the undirected edges that does not form a cycle.

Tab. XIV helps us determine the binning rate bounds. Using Th.V.4 we obtain the bounds:

$$\overline{R}_{1\to\{1,2\}}+\overline{R}_{1\to 1}+\overline{R}_{1\to 2} \ge I(U_{1\to 1};U_{1\to 2}|Q)+I(U_{1\to 2};U_{1\to 1},U_{1\to\{1,2\}}|Q) \tag{117a}$$

$$\overline{R}_{1\to\{1,2\}}+\overline{R}_{1\to 1} \ge I(U_{1\to 1};U_{1\to\{1,2\}}|Q) \tag{117b}$$

$$\overline{R}_{1\to\{1,2\}}+\overline{R}_{1\to 2} \ge I(U_{1\to 2};U_{1\to\{1,2\}}|Q) \tag{117c}$$

$$\overline{R}_{1\to 1}+\overline{R}_{1\to 2} \ge I(U_{1\to 1};U_{1\to 2}|Q) \tag{117d}$$

while using the mutual covering lemma of Th. V.6 we obtain

$$0 \ge 0 \tag{118a}$$

$$\overline{R}_{1\to 1} \ge 0 \tag{118b}$$

$$\overline{R}_{1\to 2} \ge 0 \tag{118c}$$

$$\overline{R}_{1\to 1}+\overline{R}_{1\to 2} \ge I(U_{1\to 1};U_{1\to 2}|Q) \tag{118d}$$

$$\overline{R}_{1\to\{1,2\}} \ge 0 \tag{118e}$$

$$\overline{R}_{1\to\{1,2\}}+\overline{R}_{1\to 2} \ge I(U_{1\to\{1,2\}};U_{1\to 2}|Q) \tag{118f}$$

$$\overline{R}_{1\to\{1,2\}}+\overline{R}_{1\to 2} \ge I(U_{1\to 1};U_{1\to\{1,2\}}|Q) \tag{118g}$$

$$\overline{R}_{1\to\{1,2\}}+\overline{R}_{1\to 1}+\overline{R}_{1\to 2} \ge I(U_{1\to 1};U_{1\to\{1,2\}}|Q)+I(U_{1\to 2};U_{1\to 1},U_{1\to\{1,2\}}|Q), \tag{118h}$$

since

$$\mathbf{I}_{\text{codebook}}^{\text{encoding}} = I(U_{1\to 1};U_{1\to\{1,2\}}|Q)+I(U_{1\to 2};U_{1\to 1},U_{1\to\{1,2\}}|Q), \tag{119}$$

TABLE XV

ENCODING ERROR OF EVENT TABLE FOR THE CGRAS IN (108), ALSO PICTURED IN FIG. 8(C).

	$U_{1\to\{1,2\}}$	$U_{1\to 1}$	$U_{1\to 2}$	Distribution for Th. V.4	$\mathbf{I}_{\mathbf{S}}^{\text{M.C.L.}}$ for Th. V.6
E1	☒	☒	☒	$P_{U_{1\to\{1,2\}},U_{1\to 2}}P_{U_{1\to 1}}$	$I(U_{1\to 1};U_{1\to 2},U_{1\to\{1,2\}}\|Q)$
E2	☒	☒	✓	$P_{U_{1\to 1}\|U_{1\to 2}}P_{U_{1\to 2},U_{1\to\{1,2\}}}$	$I(U_{1\to 1};U_{1\to\{1,2\}},U_{1\to 2}\|Q)$
E3	☒	✓	☒	$P_{U_{1\to\{1,2\}},U_{1\to 1},U_{1\to 2}}$	$I(U_{1\to 1};U_{1\to 2},U_{1\to\{1,2\}}\|Q)$
E4	☒	✓	✓	$P_{U_{1\to\{1,2\}},U_{1\to 1},U_{1\to 2}}$	$I(U_{1\to 1};U_{1\to\{1,2\}}\|U_{1\to 2},Q)$
E5	✓	☒	☒	$P_{U_{1\to 1}\|U_{1\to\{1,2\}}}P_{U_{1\to 2},U_{1\to\{1,2\}}}$	$I(U_{1\to 1};U_{1\to\{1,2\}}\|Q)$
E6	✓	☒	✓	$P_{U_{1\to\{1,2\}},U_{1\to 1}U_{1\to 2}}$	$I(U_{1\to 1};U_{1\to 2},U_{1\to\{1,2\}}\|Q)$
E7	✓	✓	☒	$P_{U_{1\to\{1,2\}},U_{1\to 2},U_{1\to 1}}$	$I(U_{1\to 1};U_{1\to 2}\|U_{1\to\{1,2\}},Q)$
E8	✓	✓	✓	$P_{U_{1\to\{1,2\}},U_{1\to 1},U_{1\to 2}}$	0

Now for the decoding operation: again we only consider the error events at one decoder, since the two decoders are symmetric. Consider for instance decoder 1 that decodes $U_{1\to\{1,2\}}$ and $U_{1\to 1}$. For decoder 1 it is not possible to incorrectly decode one of the two codewords if the other is incorrectly decoded, since the binning index of one codeword depends on the other and vice versa. For this reason only two events are possible: either both codewords are correctly decoded or incorrectly decoded. For this reason both Th. V.8 and Th. V.11 result in the codebook bounds

$$L_{1\to\{1,2\}}+L_{1\to 1}\leq I(Y_1;U_{1\to 1},U_{1\to\{1,2\}})+I(U_{1\to\{1,2\}};U_{1\to 1}) \tag{120a}$$

$$L_{1\to\{1,2\}}+L_{2\to 2}\leq I(Y_2;U_{1\to 2},U_{1\to\{1,2\}})+I(U_{1\to\{1,2\}};U_{1\to 2}), \tag{120b}$$

From the FME of the binning rates we obtain the region

$$R_{1\to\{1,2\}}+R_{1\to 1}\leq I(Y_1;U_{1\to 1},U_{1\to\{1,2\}}|Q) \tag{121a}$$

$$R_{1\to\{1,2\}}+R_{1\to 2}\leq I(Y_2;U_{1\to 2},U_{1\to\{1,2\}}|Q) \tag{121b}$$

$$\begin{aligned}2R_{1\to\{1,2\}}+R_{1\to 1}+R_{1\to 2}\leq{}& I(Y_1;U_{1\to 1},U_{1\to\{1,2\}}|Q)+I(Y_2;U_{1\to 2},U_{1\to\{1,2\}}|Q)\\ &-I(U_{1\to 1};U_{1\to 2}|U_{1\to\{1,2\}},Q),\end{aligned} \tag{121c}$$

while from the FME of the rate-splitting we again obtain Marton achievable region.

3) Superposition coding and binning based scheme for the BC-CM:

Let’s consider the scheme with only binning in (108), also pictured in Fig. 8(c). This scheme has three binning indexes and two steps of joint binning; the graph representing the achievable scheme is a UDG and thus it is also a CGRAS. It is easily shown that the equivalent ADG is obtained by choosing any orientation for the undirected edges that does not form a cycle.

The encoding error events are summarized in Tab. XV. The two bounds for the binning rates obtained with Th. V.4 are

$$\overline{R}_{1\to\{1,2\}}+\overline{R}_{1\to 1}+\overline{R}_{1\to 2}\geq I(U_{1\to 1};U_{1\to 2},U_{1\to\{1,2\}}|Q) \tag{122a}$$

$$\overline{R}_{1\to\{1,2\}}+\overline{R}_{1\to 1}\geq I(U_{1\to 1};U_{1\to\{1,2\}}|U_{1\to 2},Q) \tag{122b}$$

$$\overline{R}_{1\to\{1,2\}}+\overline{R}_{1\to 2}\geq 0 \tag{122c}$$

$$\overline{R}_{1\to\{1,2\}}+\overline{R}_{1\to 2}\geq 0 \tag{122d}$$

$$\overline{R}_{1\to 1}+\overline{R}_{1\to 2}\geq I(U_{1\to 1};U_{1\to 2}|U_{1\to\{1,2\}},Q) \tag{122e}$$

$$R_{1\to 1}\geq 0 \tag{122f}$$

$$R_{1\to 2}\geq 0 \tag{122g}$$

$$0\geq 0 \tag{122h}$$

while the ones obtained with Th. V.6 are:

$$0\geq 0 \tag{123a}$$

$$R_{1\to 2}\geq 0 \tag{123b}$$

$$R_{1\to 1}\geq 0 \tag{123c}$$

$$R_{1\to 1}+R_{1\to 2}\geq I(U_{1\to 1};U_{1\to 2}) \tag{123d}$$

$$R_{1\to\{1,2\}}\geq I(U_{1\to 1};U_{1\to 2}|U_{1\to\{1,2\}}) \tag{123e}$$

$$R_{1\to\{1,2\}}+R_{1\to 2}\geq 0 \tag{123f}$$

$$R_{1\to\{1,2\}}+R_{1\to 1}\geq I(U_{1\to 1};U_{1\to\{1,2\}}) \tag{123g}$$

$$\overline{R}_{1\to\{1,2\}}+\overline{R}_{1\to 1}+\overline{R}_{1\to 2}\geq I(U_{1\to 1};U_{1\to 2},U_{1\to\{1,2\}}|Q) \tag{123h}$$

TABLE XVI
Decoding error of event table at decoder 1 for the CGRAS in (108), also pictured in Fig. 8(c).

	$U_{1\to\{1,2\}}$	$U_{1\to 2}$	$P_{Y_2\|\overline{\mathbf{S}}}$ at decoder 1
E1	☒	$\times$	P_{Y_2}
E2	✓	☒	$P_{Y_2\|U_{1\to\{1,2\}}}$

with

$$\mathbf{I}^{\text{encoding}}_{\text{codebook}} = I(U_{1\to 1}; U_{1\to 2}, U_{1\to\{1,2\}}|Q). \tag{124}$$

We now see that the two theorems provide different bounds on the binning rates and that it is no straight forward to realize which of the two regions is smaller.

The decoding error at receiver 2 is summarized in Tab. VI-B3 through which we obtain that the bounds using successive decoding are

$$L_{1\to\{1,2\}} \le I(Y_2; U_{1\to\{1,2\}}|Q) \tag{125a}$$
$$L_{1\to 1} \le I(Y_2; U_{1\to 2}|U_{\{1,2\}\to 1}|Q) \tag{125b}$$

while with joint decoding we have

$$L_{1\to\{1,2\}} + L_{1\to 2} \le I(Y_2; U_{1\to 2}, U_{1\to\{1,2\}}|Q) \tag{126a}$$
$$L_{1\to 2} \le I(Y_2; U_{1\to 2}|U_{\{1,2\}\to 1}, Q) \tag{126b}$$

For decoder 1, we have the same decoding errors at decoder 1 in Sec. VI-B2:

$$L_{1\to\{1,2\}} + L_{1\to 1} \le I(Y_1; U_{1\to 1}, U_{1\to\{1,2\}}|Q) + I(U_{1\to\{1,2\}}; U_{1\to 1}|Q) \tag{127}$$

The FME of the binning rates obtained with the covering lemma and the codebook rates obtained with joint decoding gives

$$R_{1\to 2} \le I(Y_2; U_{1\to 2}|U_{\{1,2\}\to 1}|Q) \tag{128a}$$
$$R_{1\to 1} + R_{1\to\{1,2\}} \le I(Y_1; U_{1\to 1}, U_{\{1,2\}\to 1}|Q) \tag{128b}$$
$$R_{1\to 2} + R_{1\to\{1,2\}} \le I(Y_2; U_{1\to 2}, U_{\{1,2\}\to 1}|Q) \tag{128c}$$
$$R_{1\to 2} + R_{1\to\{1,2\}} \le I(Y_1; U_{1\to 1}, U_{\{1,2\}\to 1}|Q) + I(Y_2; U_{1\to 2}|U_{\{1,2\}\to 1}, Q) - I(U_{1\to 1}; U_{1\to 2}|U_{1\to\{1,2\}}) \tag{128d}$$
$$2R_{1\to 1} + R_{1\to 2} + R_{1\to\{1,2\}} \le I(Y_1; U_{1\to 1}, U_{\{1,2\}\to 1}|Q) + I(Y_2; U_{1\to 2}, U_{\{1,2\}\to 1}, Q) - I(U_{1\to 1}; U_{1\to 2}|U_{1\to\{1,2\}}) \tag{128e}$$

C. Interference channel

The InterFerence Channel (IFC) is a four-terminal network where two pairs of transmitter/receiver pairs want to communicate a message over the channel. This model is obtained from the general interference channel when $\mathcal{C}\left(\{R_{1\to 1}, R_{2\to 2}\}\right)$, that is, when the rates different from $R_{1\to 1}$ and $R_{2\to 2}$ are all set to zero.

The IFC was first proposed by Shannon [31] and the first capacity results are due to Ahlswede [32]. Capacity is known in the strong interference regime, [46], [47], [48], that is, when there is no loss of optimality in having both decoders decode both messages. The capacity for the deterministic case was determined in [22]. The largest known inner bound is by Han and Kobayashi [11] and employs rate-splitting and superposition coding. Unlike for the BC-CM and the MAC-CM, rate-splitting increases the number of messages for the IFC. We can rate-split each message into common and private parts, i.e. $W_{1\to 1}$ can be rate-split into $W'_{1\to 1}$ and $W'_{1\to\{1,2\}}$, and similarly, $W_{2,2}$ can be rate-split into $W_{2\to 2}$ and $W'_{2\to\{1,2\}}$. This rate-splitting can be represented using the matrix Γ_{IFC}

Without loss of generality we can define the matrix $\Gamma_{\text{BC}-\text{CM}}$ as

$$\Gamma_{\text{IFC}} = \begin{bmatrix} \alpha & 0 \\ 1-\alpha & 0 \\ 0 & \beta \\ 0 & 1-\beta \end{bmatrix},$$

so that (II-E) becomes

$$\mathbf{R}' = \begin{bmatrix} R'_{1\to 1} \\ R'_{1\to\{1,2\}} \\ R'_{2\to 2} \\ R'_{2\to\{1,2\}} \end{bmatrix} = \begin{bmatrix} \alpha R_{1\to 1} \\ (1-\alpha)R_{1\to\{1,2\}} \\ \beta R_{2\to 2} \\ (1-\beta)R_{1\to\{1,2\}} \end{bmatrix}. \tag{129}$$

TABLE XVII

DECODING ERROR OF EVENT TABLE FOR THE CGRAS IN (131), ALSO PICTURED IN FIG. 9(A).

	$U_{1\to\{1,2\}}$	$U_{1\to 1}$	$P_{Y_1\|\overline{\mathbf{S}}}$
D1	☒	$\dots$	P_{Y_1}
D2	✓	☒	$P_{Y_1\|U_{1\to\{1,2\}}}$

By considering all the possible choices of $(\alpha,\beta) \in [0,1]^2$ one obtains all the possible rate-splitting choices. Taking the union over all the rate-splitting matrices for an achievable region $\mathcal{A}_{\mathbf{R}'}$ vector produces the convex hull $H_{\text{convex}}(\mathcal{A}_{\mathbf{R}'})$.

Given the distribution of the messages, the possible edges in ***S*** and ***B*** are:

$$U_{1\to 1}\overline{<}U_{1\to\{1,2\}} \tag{130a}$$
$$U_{2\to 2}\overline{<}U_{2\to\{1,2\}} \tag{130b}$$
$$U_{1\to 1} \lessdot U_{1\to\{1,2\}} \tag{130c}$$
$$U_{2\to 2} \lessdot U_{2\to\{1,2\}} \tag{130d}$$
$$U_{1\to\{1,2\}} \lessdot U_{1\to 1} \tag{130e}$$
$$U_{2\to\{1,2\}} \lessdot U_{2\to 2}. \tag{130f}$$

By means of the general approach to the transmission scheme design provided by the CGRAS, we determine transmission schemes alternative to the Han and Kobayashi achievable scheme As for Sec. VI-A, we focus on three transmission strategies: one employing only superposition coding, one only binning, and one involving both.

1) **Superposition coding scheme**: (Han and Kobayashi scheme)

$$U_{1\to 1}\overline{<}U_{1\to\{1,2\}} \tag{131a}$$
$$U_{2\to 2}\overline{<}U_{2\to\{1,2\}}, \tag{131b}$$

2) **Binning based scheme.:**

$$U_{1\to 1} \lessdot U_{1\to\{1,2\}} \tag{132a}$$
$$U_{1\to\{1,2\}} \lessdot U_{1\to 1} \tag{132b}$$
$$U_{2\to 2} \lessdot U_{2\to\{1,2\}} \tag{132c}$$
$$U_{2\to\{1,2\}} \lessdot U_{2\to 2}, \tag{132d}$$

3) **Binning and superposition based scheme:**

$$U_{1\to 1}\overline{<}U_{1\to\{1,2\}} \tag{133a}$$
$$U_{2\to 2} \lessdot U_{2\to\{1,2\}} \tag{133b}$$
$$U_{2\to\{1,2\}} \lessdot U_{2\to 2}. \tag{133c}$$

In each scheme we have

$$P_{\text{encoding}} = P_Q P_{U_{1\to 1}U_{1\to\{1,2\}}|Q} P_{U_{2\to 2}U_{2\to\{1,2\}}|Q} \tag{134}$$

while

$$P^1_{\text{encoding}} = P_Q P_{U_{1\to 1}U_{1\to\{1,2\}}|Q} \tag{135}$$

and, in a symmetric fashion,

$$P^2_{\text{encoding}} = P_Q P_{U_{2\to 2}U_{2\to\{1,2\}}|Q} \tag{136}$$

The three schemes are depicted in Fig. VI-C: the convention used to represent the CGRAS is the same as for the previous figures representing a CGRAS.

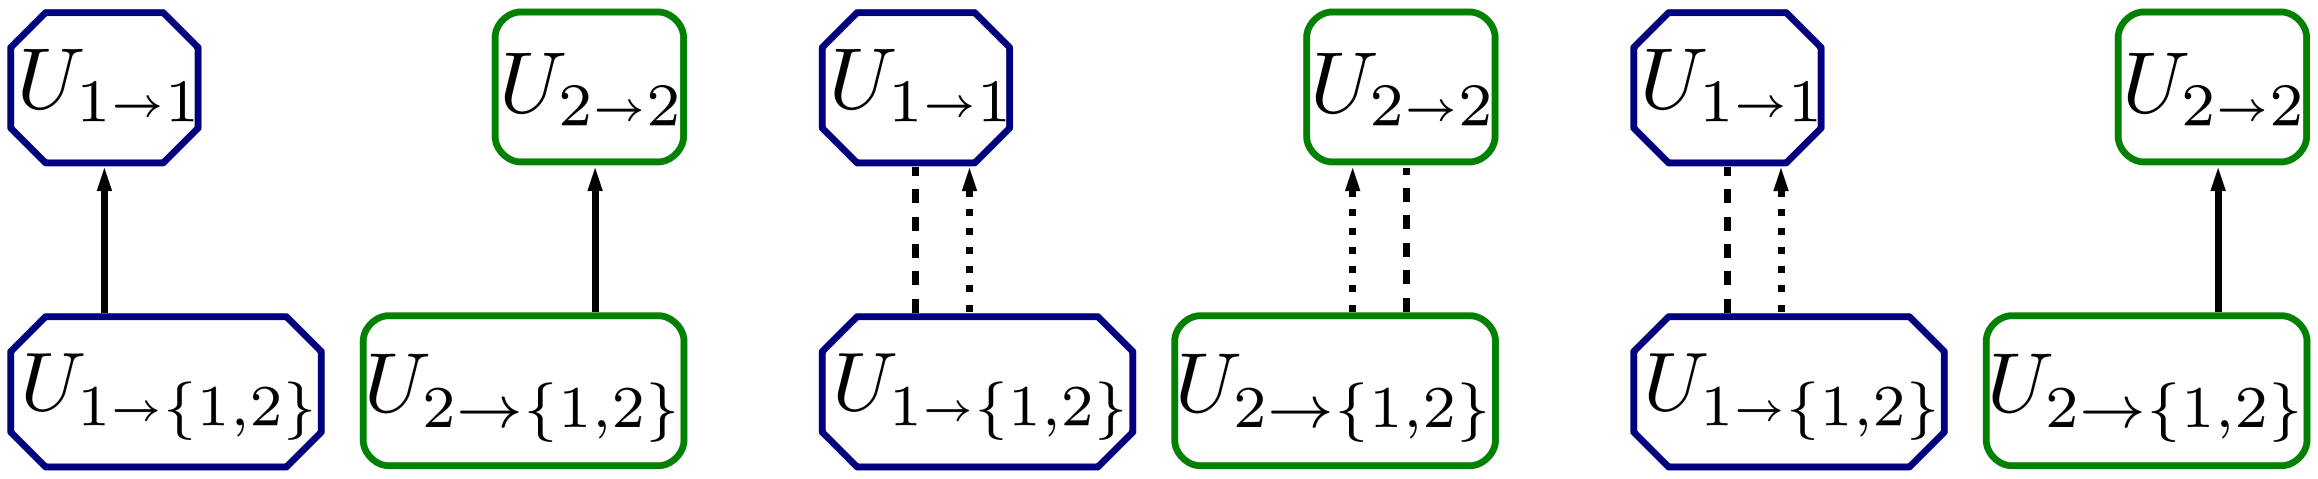

(a) Superposition coding scheme.

(b) Binning based scheme.

(c) Binning and superposition based scheme.

Fig. 9. Different achievable schemes for the IFC channel.

TABLE XVIII

ENCODING ERROR OF EVENT TABLE FOR THE CGRAS IN (106), ALSO PICTURED IN FIG. 8(A).

	$U_{1\to\{1,2\}}$	$U_{1\to 1}$	distribution for Th. V.4	$\mathbf{I}_{\mathbf{S}}^{\text{M.C.L.}}$ for Th. V.6
E1	☒	☒	$P_{U_{1\to\{1,2\}}} P_{U_{1\to 1}}$	0
E2	☒	✓	$P_{U_{1\to\{1,2\}}, U_{1\to 1}}$	$I(U_{1\to 1}; (U_{1\to\{1,2\}})$
E3	✓	☒	$P_{U_{1\to\{1,2\}}, U_{1\to 1}}$	$I(U_{1\to 1}; (U_{1\to\{1,2\}})$

1) Superposition coding based scheme for the IFC:

Let's consider first the scheme with only superposition in (131), also pictured in Fig. 9(a) which corresponds to the Han and Kobayashi scheme for the IFC in [11]. Since this scheme involves only superposition coding, its graph representation is a ADG which makes in a CGRAS.

The table summarizing the error event at decoder 1 is Tab. VI-C1. Using successive decoding of Th. V.8 we have the decoding error event bounds:

$$
\begin{aligned}
R_{1\to\{1,2\}} &\geq I(Y_1; U_{1\to\{1,2\}}) && \text{(137a)}\\
R_{1\to 1} &\geq I(Y_1; U_{1\to 1}|U_{1\to\{1,2\}}) && \text{(137b)}\\
R_{2\to\{1,2\}} &\geq I(Y_2; U_{2\to\{1,2\}}) && \text{(137c)}\\
R_{2\to 2} &\geq I(Y_2; U_{2\to 2}|U_{2\to\{1,2\}}), && \text{(137d)}
\end{aligned}
$$

while with the joint decoding of Th. V.11 we have:

$$
\begin{aligned}
R_{1\to\{1,2\}} + R_{1\to 1} &\leq I(Y_1; U_{1\to\{1,2\}}, U_{1\to 1}) && \text{(138a)}\\
R_{1\to 1} &\leq I(Y_1; U_{1\to 1}|U_{1\to\{1,2\}}) && \text{(138b)}\\
R_{2\to\{1,2\}} + R_{2\to 2} &\leq I(Y_2; U_{2\to\{1,2\}}, U_{2\to 2}) && \text{(138c)}\\
R_{2\to 2} &\leq I(Y_2; U_{2\to 2}|U_{2\to\{1,2\}}). && \text{(138d)}
\end{aligned}
$$

The classic Han and Kobayashi region for the IFC is obtained by considering the FME using the equality in (129). It was later shown that some of the rate bounds can be dropped from the FME [49], thus resulting

$$
\begin{aligned}
R_1 &\leq I(Y_1; U_{1\to 1}, U_{1\to\{1,2\}}|U_{2\to\{1,2\}}, Q) && \text{(139a)}\\
R_2 &\leq I(Y_2; U_{2\to 2}, U_{2\to\{1,2\}}|U_{1\to\{1,2\}}, Q) && \text{(139b)}\\
R_1 + R_2 &\leq I(Y_1; U_{1\to 1}, U_{1\to\{1,2\}}, U_{2\to\{1,2\}}|Q) + I(Y_2; U_{2\to 2}|U_{2\to\{1,2\}}, U_{1\to\{1,2\}}, Q) && \text{(139c)}\\
R_1 + R_2 &\leq I(Y_2; U_{2\to 2}, U_{2\to\{1,2\}}, U_{1\to\{1,2\}}|Q) + I(Y_1; U_{1\to 1}|U_{1\to\{1,2\}}, U_{2\to\{1,2\}}, Q) && \text{(139d)}\\
R_1 + R_2 &\leq I(Y_1; U_{1\to 1}, U_{2\to\{1,2\}}|U_{1\to\{1,2\}}, Q) + I(Y_2; U_{2\to 2}, U_{1\to\{1,2\}}|U_{2\to\{1,2\}}, Q) && \text{(139e)}\\
2R_1 + R_2 &\leq I(Y_1; U_{1\to 1}, U_{1\to\{1,2\}}, U_{2\to\{1,2\}}|Q) + I(Y_2; U_{2\to 2}, U_{1\to\{1,2\}}|U_{2\to\{1,2\}}, Q) && \text{(139f)}\\
R_1 + 2R_2 &\leq I(Y_2; U_{2\to 2}, U_{2\to\{1,2\}}, U_{1\to\{1,2\}}|Q) + I(Y_1; U_{1\to 1}, U_{2\to\{1,2\}}|U_{1\to\{1,2\}}, Q). && \text{(139g)}
\end{aligned}
$$

2) Binning based scheme for the IFC:

Let's consider the scheme with only superposition in (131), also pictured in Fig. 9(a). This scheme contains two instances of joint binning, therefore the graph representing the achievable region is a UDG and therefore we can define a CGRAS for this transmission scheme.

We can derive the encoding errors only at decoder 1, since the errors at decoder 2 can be obtained by symmetry.

TABLE XIX
DECODING ERROR OF EVENT TABLE FOR THE CGRAS IN (106), ALSO PICTURED IN FIG. 8(A).

	$U_{1\to\{1,2\}}$	$U_{1\to 1}$	$U_{2\to\{1,2\}}$	$P_{Y_1\|\overline{\mathbf{S}}}$
D1	☒	$\dots$	☒	P_{Y_1}
D2	☒	$\dots$	✓	$P_{Y_1\|U_{2\to\{1,2\}}}$
D3	✓	✓	☒	$P_{Y_1\|U_{1\to 1},U_{1\to\{1,2\}}}$

Using the representation of the encoding error events in Tab. VI-C2, both using Th. V.4 and Th. V.6, we obtain:

$$\overline{R}_{1\to 1}+\overline{R}_{1\to\{1,2\}}\geq I(U_{1\to 1};U_{1\to\{1,2\}}), \tag{140}$$

and by symmetry we also obtain

$$\overline{R}_{2\to 2}+\overline{R}_{2\to\{1,2\}}\geq I(U_{2\to 2};U_{2\to\{1,2\}}). \tag{141}$$

We can use Tab. XIX to derive the bounds on the codebook rates using sequential decoding:

$$L_{1\to\{1,2\}}+L_{2\to\{1,2\}}\leq I(Y_1;U_{1\to\{1,2\}},U_{2\to\{1,2\}}|Q) \tag{142a}$$
$$L_{1\to\{1,2\}}\leq I(Y_1;U_{1\to\{1,2\}}|U_{2\to\{1,2\}}|Q) \tag{142b}$$
$$L_{1\to 1}+L_{1\to\{1,2\}}\leq I(Y_1;U_{1\to 1},U_{1\to\{1,2\}}|U_{2\to\{1,2\}})+I(U_{1\to 1};U_{1\to\{1,2\}},Q) \tag{142c}$$
$$L_{2\to\{1,2\}}\leq I(Y_1;U_{1\to 1},U_{1\to\{1,2\}}|U_{2\to\{1,2\}},Q) \tag{142d}$$

as well as using joint decoding

$$L_{1\to 1}+L_{1\to\{1,2\}}+L_{2\to\{1,2\}}\leq I(Y_1;U_{1\to 1},U_{1\to\{1,2\}},U_{2\to\{1,2\}}|Q)+I(U_{1\to 1};U_{1\to\{1,2\}}|Q) \tag{143}$$
$$L_{1\to 1}+L_{1\to\{1,2\}}\leq I(Y_1;U_{1\to 1},U_{1\to\{1,2\}}|U_{2\to\{1,2\}},Q)+I(U_{1\to 1};U_{1\to\{1,2\}}|Q) \tag{144}$$
$$L_{2\to\{1,2\}}\leq I(Y_1;U_{1\to 1},U_{1\to\{1,2\}}|Q) \tag{145}$$

Note that the rate bounds in (142d) and (145) actually correspond to the error bound where the intended messages are correctly decoded, but the undesired message $W_{2\to\{1,2\}}$ is wrong. This is not a decoding error, as pointed out in Rem. V.13, and can thus be dropped.

The FME of the binning rate bounds and the codebook rate bounds, without the constraints of (145), yields

$$R_{1\to\{1,2\}}+R_{1\to 1}\leq I(Y_1;U_{1\to 1},U_{1\to\{1,2\}}|U_{2\to\{1,2\}},Q) \tag{146a}$$
$$R_{2\to\{1,2\}}+R_{2\to 2}\leq I(Y_2;U_{2\to 2},U_{2\to\{1,2\}}|U_{1\to\{1,2\}},Q) \tag{146b}$$
$$R_{1\to\{1,2\}}+R_{1\to 1}+R_{2\to\{1,2\}}\leq I(Y_1;U_{1\to 1},U_{1\to\{1,2\}},U_{2\to\{1,2\}}|Q) \tag{146c}$$
$$R_{2\to\{1,2\}}+R_{2\to 2}+R_{1\to\{1,2\}}\leq I(Y_2;U_{2\to 2},U_{2\to\{1,2\}},U_{1\to\{1,2\}}|Q) \tag{146d}$$

We can now perform the FME using the equality in (129) to obtain again the region in (139).

3) Superposition coding and binning based scheme for the IFC:

Let's consider first the scheme with only superposition in (133), also pictured in Fig. 9(c) which. This scheme satisfies the conditions of Th. III.1 so we indeed have a CGRAS.

This scheme is obtained by simply combining encoding and decoding error events of the two previous schemes to and thus, for this reason, we again obtain the achievable region in the Han and Kobayashi region in (139).

VII. CONCLUSION

In this paper we present a new general achievable rate region valid for a general class of multi-terminal networks. This achievable scheme employs rate-splitting, superposition coding, and binning, and generalizes a number of inner bounds and techniques that have been proposed in the literature. This achievable scheme may be represented using a graph representation that allows for a quick comparison between transmission strategies and a simplified derivation of the resulting achievable rate region. This paper attempts to establish a general tool to derive achievable rate regions for multi-terminal networks which contain all standard random coding techniques. A subject of ongoing research is whether there exists a combination of encoding strategies that yields the largest achievable region among all possible transmission strategies (within the proposed framework). It is commonly believed that superposition coding enlarges the achievable rate region relative to codebooks derived from conditionally independent codewords. The same conjecture holds for binning but is less clear that this is the case when considering the union over all the possible distribution of the binning RVs. We believe that the general formulation for achievability schemes and corresponding regions proposed here is a powerful tool to resolve these conjectures, with the ultimate goal of determining optimal coding strategies for general channels.

ACKNOWLEDGMENT

The author would like to thank Prof. Andrea Goldsmith, Prof. Daniela Tuninetti and Prof. Natasha Devroye for the insightful discussions and their helpful comments.

References

[1] C. Shannon, “A mathematical theory of communication,” *Bell System Technical Journal*, vol. 27, pp. 379–423, 623–656, 1948.
[2] I. Csiszar and J. Körner, *Information theory: Coding theorems for discrete memoryless channels*. Budapest: Akademiai Kiado, 1981.
[3] G. Kramer, *Topics in Multi-User Information Theory*, ser. Foundations and Trends in Communications and Information Theory. Vol. 4: No 45, pp 265-444, 2008.
[4] A. El Gamal and Y.-H. Kim, “Lecture notes on network information theory,” *preprint at arXiv:1001.3404*, 2010.
[5] S. Gel’fand and M. Pinsker, “Coding for channel with random parameters,” *Problems of control and information theory*, vol. 9, no. 1, pp. 19–31, 1980.
[6] T. Cover, “Comments on broadcast channels,” *IEEE Trans. Inf. Theory*, vol. 44, no. 6, pp. 2524–2530, Oct 1998.
[7] P. Bergmans, “Random coding theorem for broadcast channels with degraded components,” *IEEE Trans. Inf. Theory*, vol. 19, no. 2, pp. 197–207, 1973.
[8] R. Gallager, “Capacity and coding for degraded broadcast channels,” *Problems in the Transmission of Information*, vol. 10, no. 3, pp. 3–14, 1974.
[9] D. Slepian and J. Wolf, “Noiseless coding of correlated information sources,” *IEEE Trans. Inf. Theory*, vol. 19, no. 4, pp. 471–480, 1973.
[10] K. Marton, “A coding theorem for the discrete memoryless broadcast channel,” *IEEE Trans. Inf. Theory*, vol. 25, no. 3, pp. 306–311, 1979.
[11] T. Han and K. Kobayashi, “A New Achievable Rate Region for the Interference Channel,” *IEEE Trans. Inf. Theory*, vol. 27, no. 1, pp. 49–60, Jan 1981.
[12] R. Ahlswede, “Multi-way communication channels,” in *Proc. 2nd IEEE International Symposium on Information Theory (ISIT)*, 1971, pp. 103–135.
[13] E. Van der Meulen, “The discrete memoryless channel with two senders and one receiver,” in *Proc 2nd Int. Symp. Information Theory*, 1971, pp. 103–135.
[14] A. Carleial, “Interference channels,” *IEEE Trans. Inf. Theory*, vol. IT-24, no. 1, pp. 60–70, Jan. 1978.
[15] H. Sato, “The capacity of Gaussian interference channel under strong interference,” *IEEE Trans. Inf. Theory*, vol. IT-27, no. 6, pp. 786–788, Nov. 1981.
[16] H. Liao, “Multiple access channels.” DTIC Document, Tech. Rep., 1972.
[17] J. Körner and K. Marton, “Comparison of two noisy channels,” *Topics in Information Theory*, pp. 411–423, 1975.
[18] A. El Gamal, “The capacity of a class of broadcast channels,” *IEEE Trans. Inf. Theory*, vol. 25, no. 2, pp. 166–169, 1979.
[19] S. Gel’fand and M. Pinsker, “Capacity of a broadcast channel with one deterministic component,” *Probl. Peredachi Inf.*, pp. 24–34, Jan.-Mar. 1980.
[20] J. Körner and K. Marton, “General broadcast channels with degraded message sets,” *IEEE Trans. Inf. Theory*, vol. 23, no. 1, pp. 60–64, Jan 1977.
[21] H. Weingarten, Y. Steinberg, and S. Shamai, “The capacity region of the Gaussian multiple-input multiple-output broadcast channel,” *IEEE Trans. Inf. Theory*, vol. 52, no. 9, pp. 3936–3964, 2006.
[22] A. E. Gamal and M. Costa, “The capacity region of a class of deterministic interference channels,” *IEEE Trans. Inf. Theory*, vol. 28, no. 2, pp. 343–346, Mar. 1982.
[23] S. Rini, D. Tuninetti, and N. Devroye, “New Inner and Outer Bounds for the Discrete Memoryless Cognitive Channel and some Capacity Results,” *IEEE Trans. Inf. Theory*, vol. 57, no. 7, pp. 4087 – 4109, Jul. 2011.
[24] ——, “The capacity of the semi-deterministic cognitive interference channel and its application to constant gap results for the Gaussian channel,” in *Proc. IEEE Int. Conf. Commun.*, Jun. 2011.
[25] W. Wu, S. Vishwanath, and A. Arapostathis, “Capacity of a class of cognitive radio channels: Interference channels with degraded message sets,” *IEEE Trans. Inf. Theory*, vol. 53, no. 11, pp. 4391–4399, Nov. 2007.
[26] Y. Liang, A. Somekh-Baruch, H. Poor, S. Shamai, and S. Verdú, “Capacity of cognitive interference channels with and without secrecy,” *IEEE Trans. Inf. Theory*, vol. 55, no. 2, pp. 604–619, 2009.
[27] S. Andersson, D. Madigan, and M. Perlman, “On the markov equivalence of chain graphs, undirected graphs, and acyclic digraphs,” *Scandinavian Journal of Statistics*, vol. 24, no. 1, pp. 81–102, 1997.
[28] A. Dawid and S. Lauritzen, “Hyper markov laws in the statistical analysis of decomposable graphical models,” *The Annals of Statistics*, vol. 21, no. 3, pp. 1272–1317, 1993.
[29] T. Cover and J. Thomas, *Elements of information theory*. Wiley, 1991.
[30] T. Cover, “Broadcast channels,” *IEEE Trans. Inf. Theory*, vol. 18, no. 1, pp. 2–14, 1972.
[31] C. Shannon, “Two-way communication channels,” in *Proc. 4th Berkeley Symp. Math. Stat. Prob*, vol. 1. IEEE Press, 1961, pp. 351–384.
[32] R. Ahlswede, “The capacity region of a channel with two senders and two receivers,” *The annals of probability*, vol. 2, no. 5, pp. 805–814, 1974.
[33] N. Devroye, P. Mitran, and V. Tarokh, “Cognitive multiple access networks,” in *Proc. IEEE International Symposium on Information Theory (ISIT), Adelaide, Australia*, 2005, pp. 57–61.
[34] I. Maric, R. Yates, and G. Kramer, “The capacity region of the strong interference channel with common information,” in *Proc. Asilomar Conferenece on Signal, Systems and Computers*, Nov. 2005, pp. 1737–1741.
[35] Y. Liang and G. Kramer, “Rate regions for relay broadcast channels,” *IEEE Trans. Inf. Theory*, vol. 53, no. 10, pp. 3517–3535, 2007.
[36] M. Costa, “Writing on dirty paper (corresp.),” *IEEE Trans. Inf. Theory*, vol. 29, no. 3, pp. 439–441, 1983.
[37] K. Marton, “A coding theorem for the discrete memoryless broadcast channel,” *IEEE Trans. Inf. Theory*, vol. 25, no. 3, pp. 306–311, May 1979.
[38] R. Kindermann, J. Snell, and A. M. Society, *Markov random fields and their applications*. American Mathematical Society Providence, RI, 1980.
[39] D. Koller and N. Friedman, *Probabilistic graphical models*. MIT press, 2009.
[40] F. Willems and E. Van der Meulen, “The discrete memoryless multiple-access channel with cribbing encoders,” *IEEE Trans. Inf. Theory*, vol. 31, no. 3, pp. 313–327, 1985.
[41] A. El Gamal and E. Van der Meulen, “A proof of Marton’s coding theorem for the discrete memoryless broadcast channel (Corresp.),” *IEEE Trans. Inf. Theory*, vol. 27, no. 1, pp. 120 – 122, jan 1981.
[42] T. Cover and J. Thomas, *Elements of Information Theory*. Wiley-Interscience, New York, 1991.
[43] D. Slepian, “A coding theorem for multiple-access channel with correlated sources,” *Bell Syst. Tech. J.*, vol. 51, pp. 1037–1076, 1973.
[44] S. Lall, “Advanced topics in computation for control,” *Lecture Notes for Engr210b at Stanford University, Stanford, CA*, 2005.
[45] K. Marton, “The capacity region of deterministic broadcast channels,” in *Proc. IEEE International Symposium on Information Theory (ISIT)*, 1977, pp. 243–248.
[46] A. Carleial, “A case where interference does not reduce capacity (corresp.),” *IEEE Trans. Inf. Theory*, vol. 21, no. 5, pp. 569–570, 1975.
[47] H. Sato, “The capacity of the gaussian interference channel under strong interference (corresp.),” *IEEE Trans. Inf. Theory*, vol. 27, no. 6, pp. 786–788, 1981.
[48] M. Costa and A. El Gamal, “The capacity region of the discrete memoryless interference channel with strong interference.” *IEEE Trans. Inf. Theory*, vol. 33, no. 5, pp. 710–711, 1987.
[49] H. Chong, M. Motani, H. Garg, and A. El Gamal, “On the han–kobayashi region for theinterference channel,” *IEEE Trans. Inf. Theory*, vol. 54, no. 7, pp. 3188–3195, 2008.

APPENDIX

Since ϵ and δ from (6) in Th. II.1 can be driven to zero by considering the limit for $N \to \infty$ and $\epsilon \to 0$, we often disregard this term from the expressions and simply use:

$$P_X^N(x^N) = 2^{-NH(X)} \tag{147a}$$

$$|\mathcal{T}_\epsilon^N| = 2^{NH(X)} \tag{147b}$$

$$\mathbb{P}\left[X^N \in \mathcal{T}_\epsilon^N(P_X)\right] = 1 \tag{147c}$$

for $N \to \infty$ and $\epsilon \to 0$. This is done for ease of notation and it is possible to show that the results derived in the paper still hold when using the inequalities in (6).

A. *Proof of Thm. III.1*

.

Part I: Assumption 2 guarantees that the graph representation is a chain graph

To show that the graph representation of a general achievable scheme can indeed be modeled using a chain graph Markov model, no directed cycle can exist in the graph representation.

We prove this by contradiction: let's assume that a directed cycle of length n exists in the graph representation of a general achievable scheme and that Assumption 2 holds for the graph

$$U_{\mathbf{i}_1 \to \mathbf{j}_1} \overset{\lessdot}{\overline{<}} U_{\mathbf{i}_2 \to \mathbf{j}_2} \overset{\lessdot}{\overline{<}} \cdots U_{\mathbf{i}_n \to \mathbf{j}_n} \overset{\lessdot}{\overline{<}} U_{\mathbf{i}_n \to \mathbf{j}_n}$$

where $\overset{\lessdot}{\overline{<}}$ represents an edge obtained either by superposition coding or binning. Both superposition coding and binning require $\mathbf{i}_i \subseteq \mathbf{i}_{i+1}$ so the directed cycle can exist only for $\mathbf{i} = \mathbf{i}_1 = \mathbf{i}_2 = \ldots = \mathbf{i}_n$. But by Assumption 2, the RV known at the same set of encoders $\mathbf{i}$ do not form directed cycles, which contradicts the assumption.

Part II: Assumptions 1 and 3 guarantee that the chain graph is Markov equivalent to some ADG

To show that under Assumptions 1 and 3 the chain graph corresponding to the representation of a general achievable scheme is Markov equivalent to an ADG we utilize the following theorem.

Theorem A.1. [27, Prop. 4.2] *Let $G = (V, E)$ be a chain graph, then the following are Markov equivalent*

- *G is Markov equivalent to some (not necessarily unique) ADG*
- *$(G_{\mathrm{cl}(\tau)})^m$ is decomposable for all the chain components $\tau \in \mathcal{T}(G)$*

We refer the interested reader to [27] for a more general study of equivalence between ADG, UDG, and chain graphs as well as a more complete definition of the basic concepts in the following proof.

In a chain graph $\mathcal{G}$, the chain components $\tau \in \mathcal{T}$ are the set of all the connected components obtained from $\mathcal{G}$ when removing all the directed edges. $\mathrm{cl}(\tau)$ denotes the closure of the chain component $\tau \in \mathcal{T}(G)$, which is obtained by adding the boundaries of the chain component, i.e. $\mathrm{cl}(\tau) = \mathrm{bd}(\tau) \cup \tau$. $(G_{\mathrm{cl}(\tau)})^m$ denotes the moral graph of $\mathrm{cl}(\tau)$. This is the graph obtained by making the boundary of the set $\mathrm{cl}(\tau)$ complete, that is, by connecting all the nodes that have a common child.

$(G_{\mathrm{cl}(\tau)})^m$ is decomposable if and only if it is chordal, that is if every cycle of length larger than 3 has a chord, an edge connecting two non-consecutive elements in the chain.

Since the connected components are complete and the nodes in connected components have the same set parents, $(G_{\mathrm{cl}(\tau)})^m$ results in a complete graph, which is also chordal.

B. *Proof of Th. III.2*

The theorem can be proved in a similar manner to Th. III.1. The proof of Th. III.1 relies on the fact that the connected components are complete to apply Th.A.1. Since the connected components of the graph $\mathcal{G}(V, \boldsymbol{S} \cup \boldsymbol{B})$ are complete, so are the connected components of the subgraph $\mathcal{G}(V^z, \boldsymbol{S}^z \cup \boldsymbol{B}^z)$ and thus we can apply Th.A.1 to the subgraph $Gcal(V^z, \boldsymbol{S}^z \cup \boldsymbol{B}^z)$ as well.

C. *Proof of Th. IV.1*

To prove this result we extend the original proof of Willems for the MAC channel [40] to the general setup of the CGRAS. Consider a general random encoding function

$$X_k^N \sim P_{X_k^N|\{U_{\mathbf{i}\to\mathbf{j}} \ \text{s.t.} \ k \ \in \ S_{\mathbf{i}}\},Q}. \tag{148}$$

We next show that the deterministic function

$$\overline{X}_k^N = f_{X_k^N}(\{U_{\mathbf{i}\to\mathbf{j}} \ \text{s.t.} \ k \ \in \ S_{\mathbf{i}}\}, Q, A^{X_k}) \tag{149}$$

for

$$A^{X_k} \sim \mathcal{U}(0,1), \quad \imath.i.d. \ \forall \ k \in \{1 \dots N_{\text{TX}}\}$$

has the same deterministic structure as in (148).

Without loss of generality let both X_k^N and $\overline{X}_k^N$ be defined over a subset of the integers

$$\mathcal{X}_k^N = \{1, 2 \dots |\mathcal{X}_k|^N\},$$

and let $B_N^{X_k}$ be defined as

$$B_N^{X_k}(I) = \textstyle\sum_{J \leq I} P_{X_k^N|\{U_{i,j} \ \text{s.t.} \ k \in S_i\}, Q}(I) \quad I \in \mathcal{X}_k^N.$$

Encoder k sends $\overline{X}^N = I$ if

$$B_N^{X_k}(I-1) \leq A^{X_k} < B_N^{X_k}(I).$$

By construction this event has probability

$$B_N^{X_k}(I) - B_N^{X_k}(I-1) = P_{X_k^N|\{U_{i,j} \ \text{s.t.} \ k \in S_i\}, Q}(I)$$

while clearly being a deterministic function of the form

$$\overline{X}_k^N = f_{X_k^N}(\{U_{i,j} \ \text{s.t.} \ k \in S_i\}, Q, A^{X_k})$$

Suppose that the random encoder in (148) can achieve a target probability of error P_e, that is:

$$P_e = \max_{(\mathbf{i},\mathbf{j}) \in \{1 \dots 2^{N_{\text{Tx}}}\} \times \{1 \dots N_{\text{Rx}}\}, z \in S_j} \mathbb{P}\left[\widehat{W}_{i,j}^{z} \neq W_{i,j}\right] \quad \geq \int_{\mathbf{A}} P(\mathbf{A} = [a_1, a_2 \dots a_{\text{TX}}]) \mathbb{P}\left[\widehat{W}_{i,j}^{\tilde{z}} \neq W_{i,j} | \mathbf{A}\right] \quad \forall z \in S_j \tag{150}$$

where $\mathbf{A}$, the set of A^{X_k}, for each transmitter k

$$\mathbf{A} = \{A^{X_k}, \ k \in \{1..N_{\text{TX}}\}\}.$$

The fact that the probability of error P_e can be attained means that there exists a specific choice $\overline{\mathbf{A}} = [a_1, a_2 \dots a_{\text{TX}}]$ for which

$$\mathbb{P}\left[\widehat{W}_{i,j}^{\tilde{z}} \neq W_{i,j} | \overline{\mathbf{A}}\right] \leq P_e \quad \forall \ z \ \in S_j.$$

By fixing $\mathbf{A} = \overline{\mathbf{A}}$ in the random encoder in (149) we obtain a deterministic encoder that has a smaller error probability than the random encoder in (150).

D. Proof of Th. V.4

For a set $\mathbf{S} \subset \mathbf{S_B}$ for which (45) holds, the probability of an encoding error $P[E_{\mathbf{S}}]$ can be expressed as

$$\mathbb{P}\left[E_{\mathbf{S}}\right] = \mathbb{P}\left[\nexists \ \mathbf{b}_{\mathbf{i}\to\mathbf{j}}, \ (\mathbf{i},\mathbf{j}) \in \mathbf{S}, \quad \text{s.t.} \ U_{\mathbf{i}\to\mathbf{j}}^N\left(w'_{\mathbf{i}\to\mathbf{j}}, b_{\mathbf{i}\to\mathbf{j}}\right) \in \mathcal{T}_\epsilon^N\left(P_{\text{encoding}|\overline{\mathbf{S}}}\right)\right] \tag{151}$$

where $P_{\text{encoding}|\overline{\mathbf{S}}}$ is defined in (49a) and is the distribution of the CGRAS given that the set $\{U_{\mathbf{i}\to\mathbf{j}}, \ (\mathbf{i},\mathbf{j}) \in \mathbf{S}\}$ has been correctly encoded. Considering that the encoding of the codewords in $\mathbf{S}$ has failed though, the actual distribution of the codewords is $P_{\text{codebook}|\overline{\mathbf{S}}}$ as defined in (49b).

An error in encoding the codeword $U_{\mathbf{i}\to\mathbf{j}}^N \in \mathbf{S}$ implies an error in encoding $U_{\mathbf{l}\to\mathbf{m}}^N$ for all $U_{\mathbf{l}\to\mathbf{m}}^N$ such that $U_{\mathbf{l}\to\mathbf{m}} \overline{<} U_{\mathbf{i}\to\mathbf{j}}$ given that no choice of $b_{\mathbf{l}\to\mathbf{m}}$ can impose the desired typicality condition. With this consideration we write:

$$\mathbb{P}\left[E_{\mathbf{S}}\right] = \mathbb{P}\left[\nexists \ \mathbf{b}_{\mathbf{i}\to\mathbf{j}}, \ (\mathbf{i},\mathbf{j}) \in \mathbf{S} - \text{root}_{\mathbf{B}}, \quad \text{s.t.} \ U_{\mathbf{i}\to\mathbf{j}}^N\left(w_{\mathbf{i}\to\mathbf{j}}, b_{\mathbf{i}\to\mathbf{j}}\right) \in \mathcal{T}_\epsilon^N\left(P_{\text{encoding}|\overline{\mathbf{S}}}\right)\right] \tag{152}$$

where $\mathbf{S} - \text{root}_{\mathbf{B}}$ is defined in (48). We proceed now with bounding the probability of error:

$$\mathbb{P}\left[E_{\mathbf{S}}\right] \leq \mathbb{P}\left[\bigcap_{b_{\mathbf{i}\to\mathbf{j}}, \ (\mathbf{i},\mathbf{j}) \ \in \ \mathbf{S}-\text{root}_{\mathbf{B}}} \left\{U_{\mathbf{i}\to\mathbf{j}}^N, \ (\mathbf{i},\mathbf{j}) \ \in \ \mathbf{S} - \text{root}_{\mathbf{B}}\right\} \notin \mathcal{T}_\epsilon^N\left(P_{\text{encoding}}|\overline{\mathbf{S}}\right)\right] \tag{153a}$$

$$\leq \left(1 - \mathbb{P}\left[\left\{U_{\mathbf{i}\to\mathbf{j}}^N, \ (\mathbf{i},\mathbf{j}) \ \in \ \mathbf{S} - \text{root}_{\mathbf{B}}\right\} \in \mathcal{T}_\epsilon^N\left(P_{\text{encoding}}|\overline{\mathbf{S}}\right)\right]\right)^{2^{N\left(\sum_{(\mathbf{i},\mathbf{j}) \in \mathbf{S}-\text{root}_{\mathbf{B}}} \overline{R}_{\mathbf{i}\to\mathbf{j}}\right)}} \tag{153b}$$

where (153b) follows from the fact that the codewords are obtained with i.i.d. draws. Using the covering lemma of Th. V.1, we bound the probability term $\mathbb{P}\left[\left\{U^N_{\mathbf{i}\to\mathbf{j}},\ (\mathbf{i},\mathbf{j})\ \in\ \mathbf{S}-\mathrm{root}_{\mathbf{B}}\right\}\in\mathcal{T}^N_\epsilon\left(P_{\mathrm{encoding}}|\overline{\mathbf{S}}\right)\right]$ as:

$$\begin{aligned}\mathbb{P}\left[\left\{U^N_{\mathbf{i}\to\mathbf{j}},\ (\mathbf{i},\mathbf{j})\ \in\ \mathbf{S}^z-\mathrm{root}_{\mathbf{B}}\right\}\in\mathcal{T}^N_\epsilon\left(P_{\mathrm{encoding}}|\overline{\mathbf{S}}\right)\right] &\le \sum_{\mathcal{T}^N_\epsilon\left(P_{\mathrm{encoding}|\overline{\mathbf{S}}}\right)} \mathbb{P}\left[\left\{U^N_{\mathbf{i}\to\mathbf{j}},\ (\mathbf{i},\mathbf{j})\ \in\ \mathbf{S}-\mathrm{root}_{\mathbf{B}}\right\}\right] &&(154a)\\ &= 2^{N\mathbb{E}\left[\log P_{\mathrm{encoding}|\overline{\mathbf{S}}}\right]}2^{-N\mathbb{E}\left[\log P_{\mathrm{codebook}}\right]} &&(154b)\\ &= 2^{-N\mathbf{I}^{\mathrm{C.L.}}_{\mathbf{S}}} &&(154c)\end{aligned}$$

where the expectation is taken over the elements in $\mathbf{S}-\mathrm{root}$. The term $\mathbf{I}^{\mathrm{C.L.}}_{\mathbf{S}}$ as defined in (47) measures the statistical distance between the codebook distribution and the encoding distribution for the codewords that have been incorrectly encoded.

We can apply the covering lemma to (154) because the codewords in $\mathbf{S}-\mathrm{root}$ are conditionally independent given the codewords in $\overline{\mathbf{S}}$ and thus the encoding error for each bin is independent from the encoding error of all the other bins. If this were not the case the error events would be correlated and it would not be possible to apply the covering lemma and instead we would have to employ the mutual covering lemma.

E. Proof of Th. V.6

We start by evaluating the term $\mathbb{E}\left[\mathbf{K}\right]$:

$$\begin{aligned}\mathbb{E}[\mathbf{K}] &= \sum_{(\mathbf{i},\mathbf{j})\in\mathbf{S}_{\mathbf{B}}} \mathbb{P}[K_{\mathbf{b}_{\mathbf{i}\to\mathbf{j}}}=1] &&(155a)\\ &= 2^{N\sum_{(\mathbf{i},\mathbf{j})\ \in\mathbf{S}_{\mathbf{B}}}\ \overline{R}_{\mathbf{i}\to\mathbf{j}}}\ \mathbb{P}[K_{\mathbf{b}_{\mathbf{i}\to\mathbf{j}}}=1] &&(155b)\\ &= 2^{N\sum_{(\mathbf{i},\mathbf{j})\ \in\mathbf{S}_{\mathbf{B}}}\ \overline{R}_{\mathbf{i}\to\mathbf{j}}}\ \mathbb{P}\left[\left\{U^N_{\mathbf{i}\to\mathbf{j}}(w'_{\mathbf{i}\to\mathbf{j}},b_{\mathbf{i}\to\mathbf{j}}),\ b_{\mathbf{i}\to\mathbf{j}}\in\mathbf{b}_{\mathbf{i}\to\mathbf{j}}\right\}\in\mathcal{T}^N_\epsilon\left(P_{\mathrm{encoding}}\right)\right] &&(155c)\end{aligned}$$

We now bound the term $\mathbb{P}\left[\left\{U^N_{\mathbf{i}\to\mathbf{j}}(w'_{\mathbf{i}\to\mathbf{j}},b_{\mathbf{i}\to\mathbf{j}}),\ b_{\mathbf{i}\to\mathbf{j}}\in\mathbf{b}_{\mathbf{i}\to\mathbf{j}}\right\}\in\mathcal{T}^N_\epsilon\left(P_{\mathrm{encoding}}\right)\right]$ as:

$$\begin{aligned}\mathbb{P}\left[\left\{U^N_{\mathbf{i}\to\mathbf{j}}(w_{\mathbf{i}\to\mathbf{j}},b_{\mathbf{i}\to\mathbf{j}}),\ b_{\mathbf{i}\to\mathbf{j}}\in\mathbf{b}_{\mathbf{i}\to\mathbf{j}}\right\}\in\mathcal{T}^N_\epsilon\left(P_{\mathrm{encoding}}\right)\right] &= \sum_{\mathcal{T}^N_\epsilon\left(P_{\mathrm{encoding}}\right)} \mathbb{P}\left[U_{\mathbf{i}\to\mathbf{j}},\ (\mathbf{i},\mathbf{j})\in\mathbf{S}_{\mathbf{B}}\right] &&(156a)\\ &= 2^{-N\mathbf{I}^{\mathrm{encoding}}_{\mathrm{codebook}}} &&(156b)\end{aligned}$$

Note that the term $\mathbf{I}^{\mathrm{encoding}}_{\mathrm{codebook}}$ depends only on the codewords with a bin index $U^N_{\mathbf{i}\to\mathbf{j}},\ (\mathbf{i},\mathbf{j})\in\mathbf{S}_{\mathbf{B}}$, since only through binning we can change the distribution of the codewords between the codebook generation and the encoding procedure.

The evaluation of the term $\mathbb{V}\mathrm{ar}[\mathbf{K}]$ is more involved than the calculation of $\mathbb{E}[\mathbf{K}]$ and it requires to consider the correlation between two events

$$\mathbb{E}[\mathbf{K}_{\mathbf{b}_{\mathbf{i}\to\mathbf{j}}}\mathbf{K}_{\widetilde{\mathbf{b}}_{\mathbf{i}\to\mathbf{j}}}]=\mathbb{P}[\mathbf{K}_{\mathbf{b}_{\mathbf{i}\to\mathbf{j}}}\mathbf{K}_{\widetilde{\mathbf{b}}_{\mathbf{i}\to\mathbf{j}}}]$$

for any possible $(\mathbf{b}_{\mathbf{i}\to\mathbf{j}},\widetilde{\mathbf{b}}_{\mathbf{i}\to\mathbf{j}})$. This term does not depend on the specific sequences $\mathbf{b}_{\mathbf{i}\to\mathbf{j}}$ and $\widetilde{\mathbf{b}}_{\mathbf{i}\to\mathbf{j}}$, but only on whether a pair of indexes in the two sequences are equal, i.e. $b_{\mathbf{i}\to\mathbf{j}}=\widetilde{b}_{\mathbf{i}\to\mathbf{j}}$. This step is somewhat similar to the proof of Th. V.4 and the way in which $E_{\mathbf{S}}$ is defined: despite this we are not able to draw a strong parallel between the two derivations.

To evaluate $\mathbb{V}\mathrm{ar}[\mathbf{K}]$ we write:

$$\begin{aligned}\mathbb{V}\mathrm{ar}[\mathbf{K}] &= \mathbb{E}[\mathbf{K}\tilde{\mathbf{K}}] &&(157a)\\ &= \mathbb{E}\left[\left(\sum_{\mathbf{b}_{\mathbf{i}\to\mathbf{j}}} K_{\mathbf{b}_{\mathbf{i}\to\mathbf{j}}}\right)\left(\sum_{\widetilde{\mathbf{b}}_{\mathbf{i}\to\mathbf{j}}} K_{\widetilde{\mathbf{b}}_{\mathbf{i}\to\mathbf{j}}}\right)\right] &&(157b)\\ &= \sum_{\mathbf{b}_{\mathbf{i}\to\mathbf{j}}}\sum_{\widetilde{\mathbf{b}}_{i\to j}}\Big(\mathbb{P}[K_{\mathbf{b}_{i\to j}}=1,K_{\widetilde{\mathbf{b}}_{i\to j}}=1]-\mathbb{P}[K_{\mathbf{b}_{i\to j}}=1]\mathbb{P}[K_{\widetilde{\mathbf{b}}_{i\to j}}=1]\Big) &&(157c)\end{aligned}$$

We can simplify the RHS of (157c) by noticing that a number of terms of the summation are equal to zero, that is

$$\begin{aligned}&\mathbb{P}[K_{\mathbf{b}_{i\to j}}=1,K_{\widetilde{\mathbf{b}}_{i\to j}}=1]=\mathbb{P}[K_{\mathbf{b}_{i\to j}}=1]\mathbb{P}[K_{\widetilde{\mathbf{b}}_{i\to j}}=1] \qquad \Longleftrightarrow &&(158a)\\ &\left\{\left\{U^N_{\mathbf{i}\to\mathbf{j}}(w_{\mathbf{i}\to\mathbf{j}},b_{\mathbf{i}\to\mathbf{j}}),\ b_{\mathbf{i}\to\mathbf{j}}\in\mathbf{b}_{\mathbf{i}\to\mathbf{j}}\right\}\notin\mathcal{T}^N_\epsilon\right\}\perp\left\{\left\{U^N_{\mathbf{i}\to\mathbf{j}}(w_{\mathbf{i}\to\mathbf{j}},\widetilde{b}_{\mathbf{i}\to\mathbf{j}}),\ b_{\mathbf{i}\to\mathbf{j}}\in\mathbf{b}_{\mathbf{i}\to\mathbf{j}}\right\}\notin\mathcal{T}^N_\epsilon\right\} &&(158b)\end{aligned}$$

The condition in (158) is verified in two cases:

- all the indexes $b_{\mathbf{i}\to\mathbf{j}}$ and $\widetilde{b}_{\mathbf{i}\to\mathbf{j}}$ are different,
- some of the indexes $b_{\mathbf{i}\to\mathbf{j}}$ and $\widetilde{b}_{\mathbf{i}\to\mathbf{j}}$ are the same but they belong to different codebooks, that is when $b_{\mathbf{l}\to\mathbf{m}} \neq \widetilde{b}_{\mathbf{l}\to\mathbf{m}}$ for some $U_{\mathbf{i}\to\mathbf{j}} \overline{<} U_{\mathbf{l}\to\mathbf{m}}$.

This follows from the fact that the codewords are independently generated and indexed according to (37) and thus any difference in the indexes of (37) yields independent codewords. The condition for which the (158) occurs can be formally expressed as

$$\exists \; b_{\mathbf{i}\to\mathbf{j}}, \widetilde{b}_{\mathbf{i}\to\mathbf{j}}, \; \text{s.t.} \; b_{\mathbf{i}\to\mathbf{j}} = \widetilde{b}_{\mathbf{i}\to\mathbf{j}} \implies \; b_{\mathbf{l}\to\mathbf{m}} = \widetilde{b}_{\mathbf{l}\to\mathbf{m}} \; \forall \; (\mathbf{l}, \mathbf{m}) \;\; \text{s.t.} \; , \; U_{\mathbf{l}\to\mathbf{m}} \overline{<} U_{\mathbf{l}\to\mathbf{m}}. \tag{159}$$

In the following we restrict our attention to the sequences $\widetilde{\mathbf{b}}_{\mathbf{i}\to\mathbf{j}}$ such that this condition (159) holds. We now continue to bound the error probability as:

$$\mathbb{V}\text{ar}[\mathbf{K}] = \sum_{\mathbf{b}_{\mathbf{i}\to\mathbf{j}}} \sum_{\widetilde{\mathbf{b}}_{\mathbf{i}\to\mathbf{j}}, \text{ (159)}} \tag{160a}$$

$$\left(\mathbb{P}[K_{\mathbf{b}_{i\to j}} = 1, K_{\widetilde{\mathbf{b}}_{\mathbf{i}\to\mathbf{j}}} = 1] - \mathbb{P}[K_{\mathbf{b}_{\mathbf{i}\to\mathbf{j}}} = 1] \mathbb{P}[K_{\widetilde{\mathbf{b}}_{\mathbf{i}\to\mathbf{j}}} = 1] \right) \tag{160b}$$

$$\leq \sum_{\mathbf{b}_{\mathbf{i}\to\mathbf{j}}} \sum_{\widetilde{\mathbf{b}}_{i\to j}, \text{ (159)}} \tag{160c}$$

$$\mathbb{P}\left[K_{\mathbf{b}_{\mathbf{i}\to\mathbf{j}}} = 1, K_{\widetilde{\mathbf{b}}_{i\to j}} = 1 \right] \tag{160d}$$

$$= \sum_{\mathbf{b}_{\mathbf{i}\to\mathbf{j}}} \sum_{\widetilde{\mathbf{b}}_{\mathbf{i}\to\mathbf{j}}, \text{ (159)}} \tag{160e}$$

$$\mathbb{P}\left[K_{\mathbf{b}_{\mathbf{i}\to\mathbf{j}}} = 1 \right] \mathbb{P}\left[K_{\widetilde{\mathbf{b}}_{\mathbf{i}\to\mathbf{j}}} = 1 | K_{\mathbf{b}_{\mathbf{i}\to\mathbf{j}}} = 1 \right] \tag{160f}$$

$$= \sum_{\mathbf{b}_{\mathbf{i}\to\mathbf{j}}} \sum_{\widetilde{\mathbf{b}}_{i\to j}, \text{ (159)}} \tag{160g}$$

$$\mathbb{E}\left[K_{\mathbf{b}_{\mathbf{i}\to\mathbf{j}}} \right] \mathbb{P}\left[K_{\widetilde{\mathbf{b}}_{i\to j}} = 1 | K_{\mathbf{b}_{\mathbf{i}\to\mathbf{j}}} = 1 \right] \tag{160h}$$

$$= \overline{\mathbb{E}[\mathbf{K}]} \cdot \sum_{\mathbf{b}_{i\to j}} \sum_{\widetilde{\mathbf{b}}_{i\to j}, \text{ (159)}} \tag{160i}$$

$$\mathbb{P}\left[K_{\widetilde{\mathbf{b}}_{\mathbf{i}\to\mathbf{j}}} = 1 | K_{\mathbf{b}_{\mathbf{i}\to\mathbf{j}}} = 1 \right], \tag{160j}$$

Consider the term $\mathbb{P}\left[K_{\widetilde{\mathbf{b}}_{\mathbf{i}\to\mathbf{j}}} = 1 | K_{\mathbf{b}_{\mathbf{i}\to\mathbf{j}}} = 1 \right]$ in the RHS of (160j): since the codewords are generated in an i.i.d. fashion, this term does not depend on the specific values of $\mathbf{b}_{\mathbf{i}\to\mathbf{j}}$ and $\widetilde{\mathbf{b}}_{\mathbf{i}\to\mathbf{j}}$ but solely on whether $b_{\mathbf{i}\to\mathbf{j}} = \widetilde{b}_{\mathbf{i}\to\mathbf{j}}$.

With this consideration we can rewrite the summation not in terms of the sequence of bin indexes $\mathbf{b}_{\mathbf{i}\to\mathbf{j}}$ and $\widetilde{\mathbf{b}}_{\mathbf{i}\to\mathbf{j}}$ as a sum over all the patterns in which the indexes in the two sequences can match each other.

We now link the notation of this theorem with the notation of Th. V.1 by noticing that condition (159) can be rewritten in an equivalent form as (45) by defining $\mathbf{S}$ as:

$$\mathbf{S} = \left\{ (\mathbf{i}, \mathbf{j}), \;\; b_{\mathbf{i}\to\mathbf{j}} \neq \widetilde{b}_{\mathbf{i}\to\mathbf{j}} \right\}, \tag{161}$$

in fact one readily notices that (159) does not depend on the specific sequence $\widetilde{\mathbf{b}}_{\mathbf{i}\to\mathbf{j}}$ but only on whether $b_{\mathbf{i}\to\mathbf{j}} = \widetilde{b}_{\mathbf{i}\to\mathbf{j}}$ and thus (159) for the set $\mathbf{b}_{\mathbf{i}\to\mathbf{j}}$ translates to condition (45) for the set $\mathbf{S}$.

With the convention in (161) we can write

$$\mathbb{V}\text{ar}[\mathbf{K}] \leq \overline{\mathbb{E}[\mathbf{K}]} \cdot \sum_{\mathbf{b}_{i\to j}} \sum_{\widetilde{\mathbf{b}}_{i\to j}, \text{ (159)}} \mathbb{P}\left[K_{\widetilde{\mathbf{b}}_{\mathbf{i}\to\mathbf{j}}} = 1 | K_{\mathbf{b}_{\mathbf{i}\to\mathbf{j}}} = 1 \right] \tag{162a}$$

$$\leq \overline{\mathbb{E}[\mathbf{K}]} \cdot \sum_{\mathbf{b}_{\mathbf{i}\to\mathbf{j}}} \sum_{\mathbf{S}\subset\mathbf{S}_{\mathbf{B}}, \text{ (45)}} 2^{\sum_{(\mathbf{i},\mathbf{j})\in\mathbf{S}} \overline{R}_{\mathbf{i}\to\mathbf{j}}} \mathbb{P}\left[E_{\mathbf{S}} | K_{\mathbf{b}_{\mathbf{i}\to\mathbf{j}}} = 1 \right], \tag{162b}$$

where (162b) follows from the fact that each pattern $\mathbf{S}$ appears at most $2^{\sum_{(\mathbf{i},\mathbf{j})\in\mathbf{S}} \overline{R}_{\mathbf{i}\to\mathbf{j}}}$, and where $\mathbb{P}\left[E_{\mathbf{S}} | K_{\mathbf{b}_{\mathbf{i}\to\mathbf{j}}} = 1 \right]$ is defined as:

$$\mathbb{P}\left[E_{\mathbf{S}}|K_{\mathbf{b}_{\mathbf{i}\to\mathbf{j}}}=1\right]=\mathbb{P}\Big[\Big\{U^N_{\mathbf{i}\to\mathbf{j}}(w_{\mathbf{i}\to\mathbf{j}},\widetilde{b}_{\mathbf{i}\to\mathbf{j}}),\ \widetilde{b}_{\mathbf{i}\to\mathbf{j}}\in\widetilde{\mathbf{b}}_{\mathbf{i}\to\mathbf{j}}\Big\}\in\mathcal{T}^N_\epsilon\left(P_{\text{encoding}}\right)|\left\{U^N_{\mathbf{i}\to\mathbf{j}}(w_{\mathbf{i}\to\mathbf{j}},b_{\mathbf{i}\to\mathbf{j}}),\ b_{\mathbf{i}\to\mathbf{j}}\in\mathbf{b}_{\mathbf{i}\to\mathbf{j}}\right\}\in\mathcal{T}^N_\epsilon\left(P_{\text{encoding}}\right), \tag{163a}$$

$$\widetilde{b}_{\mathbf{i}\to\mathbf{j}}=b_{\mathbf{i}\to\mathbf{j}}\ \forall\ (\mathbf{i},\mathbf{j})\in\overline{\mathbf{S}}\Big] \tag{163b}$$

$$=\mathbb{P}\Big[\left\{U^N_{\mathbf{i}\to\mathbf{j}}(w_{\mathbf{i}\to\mathbf{j}},b_{\mathbf{i}\to\mathbf{j}}),b_{\mathbf{i}\to\mathbf{j}}\in\mathbf{b}_{\mathbf{i}\to\mathbf{j}},\ (\mathbf{i},\mathbf{j})\in\mathbf{S}\right\}\cup\Big\{U^N_{\mathbf{i}\to\mathbf{j}}(w_{\mathbf{i}\to\mathbf{j}},\widetilde{b}_{\mathbf{i}\to\mathbf{j}}),\widetilde{b}_{\mathbf{i}\to\mathbf{j}}\in\widetilde{\mathbf{b}}_{\mathbf{i}\to\mathbf{j}},\ (\mathbf{i},\mathbf{j})\in\overline{\mathbf{S}}\Big\}\in\mathcal{T}^N_\epsilon\left(P_{\text{encoding}}\right) \tag{163c}$$

$$|\left\{U^N_{\mathbf{i}\to\mathbf{j}}(w_{\mathbf{i}\to\mathbf{j}},b_{\mathbf{i}\to\mathbf{j}}),\ b_{\mathbf{i}\to\mathbf{j}}\in\mathbf{b}_{\mathbf{i}\to\mathbf{j}}\right\}\in\mathcal{T}^N_\epsilon\left(P_{\text{encoding}}\right)\Big] \tag{163d}$$

$$=\mathbb{P}\Big[\left\{U^N_{\mathbf{i}\to\mathbf{j}}(w_{\mathbf{i}\to\mathbf{j}},b_{\mathbf{i}\to\mathbf{j}}),b_{\mathbf{i}\to\mathbf{j}}\in\mathbf{b}_{\mathbf{i}\to\mathbf{j}},\ (\mathbf{i},\mathbf{j})\in\mathbf{S}\right\}\in\mathcal{T}^N_\epsilon\left(P_{\text{encoding}|\overline{\mathbf{S}}}\right)\Big] \tag{163e}$$

Since joint typicality implies marginal typicality, the codewords in $\overline{\mathbf{S}}$ have the desired typicality properties for encoding while the codewords in $\mathbf{S}$ can be correctly encoded only if the binning rates are sufficiently large. The distribution that we must be able to impose on the codewords in $\mathbf{S}$ is again the distribution $P_{\text{encoding}|\overline{\mathbf{S}}}$ in (49a). In fact the codewords in $\overline{\mathbf{S}}$ appear to be generated according to the distribution $\sum_{U_{\mathbf{i},\mathbf{j}},\ (\mathbf{i},\mathbf{j})\mathbf{S}}$ and thus the remaining codewords must appear to be generated according to the distribution $P_{\text{encoding}|\overline{\mathbf{S}}}$, which is the distribution P_{encoding} condition on $\{U_{\mathbf{i}\to\mathbf{j}},\ (\mathbf{i},\mathbf{j})\in\mathbf{S}\}$. The term $\mathbb{P}\left[E_{\mathbf{S}}|K_{\mathbf{b}_{\mathbf{i}\to\mathbf{j}}}=1\right]$ can be bounded in a similar way as (154) by using the mutual covering lemma of Th. V.2:

$$\mathbb{P}\left[E_{\mathbf{S}}|K_{\mathbf{b}_{\mathbf{i}\to\mathbf{j}}}=1\right]=\mathbb{P}\left[\left\{U^N_{\mathbf{i}\to\mathbf{j}},\ (\mathbf{i},\mathbf{j})\in\mathbf{S}\right\}\in\mathcal{T}^N_\epsilon\left(P_{\text{encoding}|\overline{\mathbf{S}}}\right)\right] \tag{164a}$$

$$=\sum_{\mathcal{T}^N_\epsilon\left(P_{\text{encoding}|\overline{\mathbf{S}}}\right)}\mathbb{P}\left[\{U_{\mathbf{i}\to\mathbf{j}}\in\mathbf{S}\}\right] \tag{164b}$$

$$=2^{N\mathbb{E}\left[\log P_{\text{encoding}|\overline{\mathbf{S}}}\right]}2^{-N\mathbb{E}\left[\log P_{\text{codebook}|\overline{\mathbf{S}}}\right]} \tag{164c}$$

$$=2^{-N\mathbf{I}^{\text{M.C.L.}}_{\mathbf{S}}}, \tag{164d}$$

where the expectation is taken over the elements in $\mathbf{S}$ and where $P_{\text{encoding}|\overline{\mathbf{S}}}$ and $P_{\text{codebook}|\overline{\mathbf{S}}}$ are defined in (49a). Note that the term $\mathbf{I}^{\text{M.C.L.}}_{\mathbf{S}}$ in (58b) and $\mathbf{I}^{\text{C.L.}}_{\mathbf{S}}$ in (47) is in the set where the expectation is considered: $\mathbf{I}^{\text{M.C.L.}}_{\mathbf{S}}$ we consider all the elements in $\mathbf{S}$ while in $\mathbf{I}^{\text{C.L.}}_{\mathbf{S}}$ we only consider the elements in $\mathbf{S}-\text{root}$.

We notice here that since the elements in $\mathbf{S}$ are not conditionally independent given $\overline{\mathbf{S}}$, it is not possible to use the covering lemma and it is instead necessary to use the mutual covering lemma, which allows for the codewords with a bin index to be dependent. This was not the case in (154) for the proof of Th. V.4 where the covering lemma is sufficient.

We can now return to (59c) and use both (155) and (164) to bound the probability of encoding error:

$$\mathbb{P}[\mathbf{K}=0]\leq\frac{\overline{\mathbb{E}[\mathbf{K}]}\cdot\sum_{\mathbf{b}_{\mathbf{i}\to\mathbf{j}}}\sum_{\mathbf{S}\subset\mathbf{S}_{\mathbf{B}},\ (45)}2^{N\left(\sum_{(\mathbf{i},\mathbf{j})\ \in\ \mathbf{S}}\overline{R}_{\mathbf{i}\to\mathbf{j}}-I^{\text{M.C.L.}}_{\mathbf{S}}\right)}}{\overline{\mathbb{E}\left[\mathbf{K}\right]}^2} \tag{165a}$$

$$=2^{-N\left(\sum_{(\mathbf{i},\mathbf{j})\ \in\mathbf{S}_{\mathbf{B}}}\ \overline{R}_{\mathbf{i}\to\mathbf{j}}-\mathbf{I}^{\text{encoding}}_{\text{codebook}}\right)}\sum_{\mathbf{b}_{\mathbf{i}\to\mathbf{j}}}\sum_{\mathbf{S}\subset\mathbf{S}_{\mathbf{B}},\ (45)}2^{N\left(\sum_{(\mathbf{i},\mathbf{j})\ \in\ \mathbf{S}}\overline{R}_{\mathbf{i}\to\mathbf{j}}-I^{\text{M.C.L.}}_{\mathbf{S}}\right)} \tag{165b}$$

$$=\sum_{\mathbf{b}_{\mathbf{i}\to\mathbf{j}}}\sum_{\mathbf{S}\subset\mathbf{S}_{\mathbf{B}},\ (45)}2^{N\left(\sum_{(\mathbf{i},\mathbf{j})\ \in\ \overline{\mathbf{S}}}-\overline{R}_{\mathbf{i}\to\mathbf{j}}-I^{\text{M.C.L.}}_{\mathbf{S}}+\mathbf{I}^{\text{encoding}}_{\text{codebook}}\right)}, \tag{165c}$$

Therefore the RHS of (165) goes to zero when (57) holds.

F. Proof of Th. V.8

For the set $\mathbf{S}\subset\mathbf{S}_{\mathbf{D}}$ such that (66) holds, the probability of decoding error $\mathbb{P}[D^z_{\mathbf{S}}]$ can be expressed as

$$\mathbb{P}[D^z_{\mathbf{S}}]=\mathbb{P}\left[\exists\ (\widetilde{\mathbf{w}}_{\mathbf{i}\to\mathbf{j}},\widetilde{\mathbf{b}}_{\mathbf{i}\to\mathbf{j}})\neq(\mathbf{1},\overline{b})\ \text{ s.t. }\ \left(Y^z,\{\widetilde{U}_{\mathbf{i}\to\mathbf{j}}(\widetilde{w}_{\mathbf{i}\to\mathbf{j}},\widetilde{b}_{\mathbf{i}\to\mathbf{j}}),\ (\mathbf{i},\mathbf{j})\in\mathbf{S}^z_{\mathbf{D}}\}\right)\in\mathcal{T}^N_\epsilon\left(Y^z,\{U_{\mathbf{i}\to\mathbf{j}},\ (\mathbf{i},\mathbf{j})\in\mathbf{S}^z\}\right)\right], \tag{166}$$

An error in decoding the codeword $U^N_{\mathbf{i}\to\mathbf{j}}\in\mathbf{S}$ implies an error in decoding $U^N_{\mathbf{l}\to\mathbf{m}}$ for all $U^N_{\mathbf{l}\to\mathbf{m}}$ such that $U_{\mathbf{l}\to\mathbf{m}}\overline{<}U_{\mathbf{i}\to\mathbf{j}}$ or $U_{\mathbf{l}\to\mathbf{m}}\lessdot U_{\mathbf{i}\to\mathbf{j}}$ given that $U_{\mathbf{l}\to\mathbf{m}}$ depends on $w_{\mathbf{i}\to\mathbf{j}}$ and $b_{\mathbf{i}\to\mathbf{j}}$. With this consideration we write:

$$\mathbb{P}\left[D_{\mathbf{S}}\right]\leq\mathbb{P}\left[\left(Y^N_z,\{U_{\mathbf{i}\to\mathbf{j}}(w_{\mathbf{i}\to\mathbf{j}},b_{\mathbf{i}\to\mathbf{j}})\in\mathbf{S}^z-\text{root}_{\mathbf{D}}\}\right)\in\mathcal{T}^N_\epsilon\left(\{Y_z,U_{\mathbf{i}\to\mathbf{j}},\ \forall\ (\mathbf{i},\mathbf{j})\in\mathbf{S}^z-\text{root}_{\mathbf{D}}\}\right)\right], \tag{167}$$

that is, the probability of the decoding error event $D_{\mathbf{S}^z}$ is upper bounded by the probability that the elements in $\mathbf{S} - \mathrm{root}^z_{\mathbf{D}}$, defined as in (63), are incorrectly decoded. Continuing the above series of inequalities we write

$$\mathbb{P}\left[D_{\mathbf{S}^z}\right] \leq \mathbb{P}\left[\bigcup_{(w_{\mathbf{i}\to\mathbf{j}}, b_{\mathbf{i}\to\mathbf{j}}),\ (\mathbf{i},\mathbf{j})\ \in\ \mathbf{S}^z - \mathrm{root}_{\mathbf{D}}} \left(Y_z^N, \{U_{\mathbf{i}\to\mathbf{j}}(w_{\mathbf{i}\to\mathbf{j}}, b_{\mathbf{i}\to\mathbf{j}}) \in \mathbf{S}^z - \mathrm{root}_{\mathbf{D}}\}\right) \in \mathcal{T}_\epsilon^N\left(P_{Y_z,\ \mathrm{encoding}|\overline{\mathbf{S}}}\right)\right] \tag{168a}$$

$$= 2^{\sum_{(\mathbf{i},\mathbf{j})\ \in\ \mathbf{S}^z - \mathrm{root}_{\mathbf{D}}} L_{\mathbf{i}\to\mathbf{j}}} \mathbb{P}\left[\left(Y_z^N, \{U_{\mathbf{i}\to\mathbf{j}}(w_{\mathbf{i}\to\mathbf{j}}, b_{\mathbf{i}\to\mathbf{j}}) \in \mathbf{S}^z - \mathrm{root}_{\mathbf{D}}\}\right) \in \mathcal{T}_\epsilon^N\left(P_{Y_z,\ \mathrm{encoding}|\overline{\mathbf{S}}}\right)\right], \tag{168b}$$

where (168b) follows from the fact that codewords are obtained from i.i.d. draws. Using the packing lemma of Th. V.3 we can bound the probability of the term $\mathbb{P}\left[\left(Y_z^N, \{U_{\mathbf{i}\to\mathbf{j}}(w_{\mathbf{i}\to\mathbf{j}}, b_{\mathbf{i}\to\mathbf{j}}) \in \mathbf{S}^z - \mathrm{root}_{\mathbf{D}}\}\right) \in \mathcal{T}_\epsilon^N\left(P_{Y_z,\ \mathrm{encoding}}\right)\right]$ as:

$$\mathbb{P}\left[\left(Y_z^N, \{U_{\mathbf{i}\to\mathbf{j}}(w_{\mathbf{i}\to\mathbf{j}}, b_{\mathbf{i}\to\mathbf{j}}) \in \mathbf{S}^z - \mathrm{root}_{\mathbf{D}}\}\right) \in \mathcal{T}_\epsilon^N\left(P_{Y_z,\mathbf{X},\ \mathrm{encoding}|\overline{\mathbf{S}}}\right)\right] \tag{169a}$$

$$\leq \sum_{\mathcal{T}_\epsilon^N\left(P_{Y_z,\ \mathrm{encoding}|\overline{\mathbf{S}}}\right)} \mathbb{P}\left[\left\{Y_z,\ U^N_{\mathbf{i}\to\mathbf{j}},\ (\mathbf{i},\mathbf{j}) \in \mathbf{S}^z - \mathrm{root}_{\mathbf{D}}\right\}\right] \tag{169b}$$

$$= 2^{N\mathbb{E}_{Y_z\mathbf{S}^z - \mathrm{root}_{\mathbf{D}}}[\log P_{Y_z,\ \mathrm{encoding}|\overline{\mathbf{S}}}]} 2^{-N\mathbb{E}_{Y_z\mathbf{S}^z - \mathrm{root}_{\mathbf{D}}}\left[\log[P_{Y_z,\ \mathrm{decoding}|\overline{\mathbf{S}}}]\right]} \tag{169c}$$

$$= 2^{N\mathbf{I}_{\mathbf{S}}^{z,\ \mathrm{S.D}}} \tag{169d}$$

where the expectation is taken over the elements in $\mathbf{S}^z - \mathrm{root}_{\mathbf{D}}$ and where

$$P_{Y_z,\ \mathrm{decoding}|\overline{\mathbf{S}}} = \frac{P_{Y_z|\{U_{\mathbf{i}\to\mathbf{j}}\ \forall\ (\mathbf{i},\mathbf{j})\}} P_{\mathrm{encoding}}}{\sum_{(\mathbf{i},\mathbf{j})\in\overline{\mathbf{S}}} P_{\mathrm{encoding}}}. \tag{170}$$

The term $\mathbf{I}_{\mathbf{S}}^{z,\ \mathrm{S.D}}$ as defined in (V.8) measures the statistical distance between the distribution of the channel output and the codewords in $\mathbf{S}^z - \mathrm{root}_{\mathbf{D}}$ in the case of correct and incorrect decoding given the correctly decoded codewords in $\overline{\mathbf{S}}$.

G. Proof of Th. V.11

Consider again the factorization of the decoding error probability in Th. V.8: another approach in bounding the probability of decoding error in (167) is:

$$\mathbb{P}\left[D_{\mathbf{S}^z}\right] \leq \mathbb{P}\left[\bigcup_{\mathbf{S}^z} \left(Y_z^N, \{U_{\mathbf{i}\to\mathbf{j}}(w_{\mathbf{i}\to\mathbf{j}}, b_{\mathbf{i}\to\mathbf{j}}) \in \mathbf{S}\}\right) \in \mathcal{T}_\epsilon^N\left(P_{Y_z,\mathrm{encoding}|\overline{\mathbf{S}}}\right)\right] \tag{171a}$$

$$= 2^{\sum_{(\mathrm{i},\mathrm{j})\ \in\ \mathrm{S}} L_{\mathbf{i}\to\mathbf{j}}} \mathbb{P}\left[\left(Y_z^N, \{U_{\mathbf{i}\to\mathbf{j}}(w_{\mathbf{i}\to\mathbf{j}}, b_{\mathbf{i}\to\mathbf{j}}) \in \mathbf{S}^z\}\right), \in \mathcal{T}_\epsilon^N\left(P_{Y_z,\mathrm{encoding}|\overline{\mathbf{S}}}\right)\right], \tag{171b}$$

where (171b) follows from the fact that codewords are obtained from i.i.d. draws. Using the packing lemma of Th. V.3 we can bound the probability of the term $\mathbb{P}\left[\left(Y_z^N, \{U_{\mathbf{i}\to\mathbf{j}}(w_{\mathbf{i}\to\mathbf{j}}, b_{\mathbf{i}\to\mathbf{j}}) \in \mathbf{S}^z\}\right) \in \mathcal{T}_\epsilon^N\left(P_{Y_z,\mathrm{encoding}|\overline{\mathbf{S}}}\right)\right]$ as:

$$\mathbb{P}\left[\left(Y_z^N, \{U_{\mathbf{i}\to\mathbf{j}}(w_{\mathbf{i}\to\mathbf{j}}, b_{\mathbf{i}\to\mathbf{j}}) \in \mathbf{S}^z\}\right) \in \mathcal{T}_\epsilon^N\left(P_{Y_z,\mathrm{encoding}|\overline{\mathbf{S}}}\right)\right] \tag{172a}$$

$$\leq \sum_{\mathcal{T}_\epsilon^N\left(P_{Y_z,\mathrm{encoding}|\overline{\mathbf{S}}}\right)} P_{Y_z^N|\{U_{\mathbf{l}\to\mathbf{m}}\in\overline{\mathbf{S}^z}\}} P_{\mathrm{encoding}}\left(\{U_{\mathbf{i}\to\mathbf{j}} \in \overline{\mathbf{S}}\}\right) P_{\mathrm{coding}}\left(\{U_{\mathbf{i}\to\mathbf{j}} \in \mathbf{S}^z\}\right) \tag{172b}$$

$$= 2^{N\mathbb{E}_{Y_z\mathbf{S}}[\log P_{Y_z,\ \mathrm{encoding}|\overline{\mathbf{S}}}]} 2^{-N\mathbb{E}_{Y_z\mathbf{S}}\left[\log[P_{Y_z,\ \mathrm{decoding}|\overline{\mathbf{S}}}]\right]} \tag{172c}$$

$$= 2^{N\mathbf{I}_{\mathbf{S}}^{z,\ \mathrm{J.D}}} \tag{172d}$$

where the expectation is taken over the elements in $\mathbf{S}^z$. The term $\mathbf{I}_{\mathbf{S}}^{z,\ \mathrm{S.D}}$ as defined in (83) measures the statistical distance between the distribution of the channel output and the codewords in $\mathbf{S}$ in the case of correct and incorrect decoding given the correctly decoded codewords in $\overline{\mathbf{S}}$.